


# FLP-25-T1-VSF/3+1

## SPD - for low voltage / SPD type 1 / Combination type - T1 (25 kA)

Lightning current arrester with integrated backup fuse for 3-phase TT system  
pluggable module, visual fault signalling, module locking, remote fault signalling

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- zero leakage current
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office and industrial buildings
- with integrated backup fuse

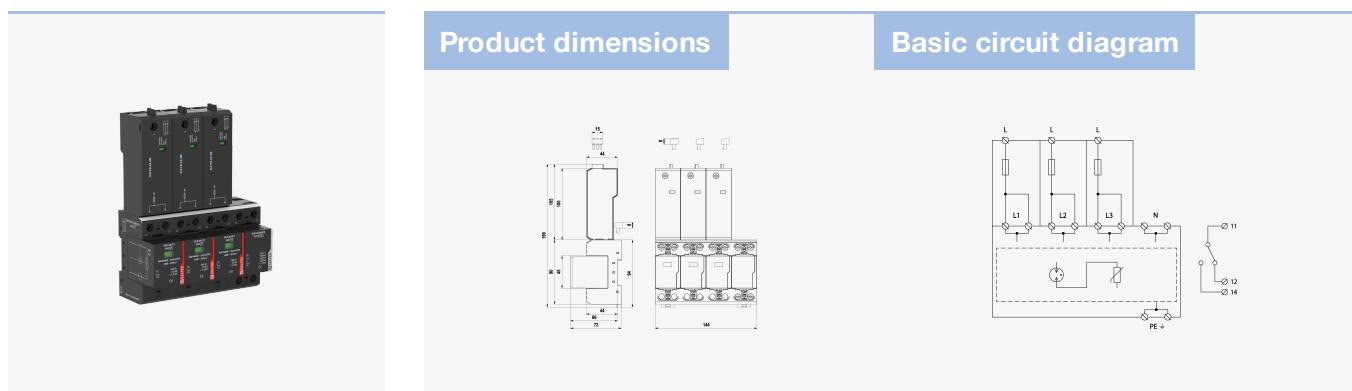

Parameter name	Parameter value
Type of SPD	T1
Mounting	DIN rail 35 mm
Nominal voltage	$U_n$ 230 V AC
Maximum operating voltage L-N	$U_c$ 260.00 V AC
Maximum operating voltage N-PE	$U_c$ 255.00 V AC
Nominal load current for "V" connection	$I_L$ 125 A
Type of network	TT TN-S
Maximum overcurrent protection	-
Short-circuit current rating	$I_{SCCR}$ 50.0 kA
Residual current	$I_{PE}$ 0.004 mA
Lightning impulse current (10/350 µs) L-N	$I_{imp}$ 25.00 kA

Lightning impulse current (10/350 µs) N-PE	$I_{imp}$	100.00 kA
Voltage protection level mode L-N	$U_p$	1.50 kV
Voltage protection level mode L-PE	$U_p$	2.20 kV
Voltage protection level mode N-PE	$U_p$	1.50 kV
Ability to independently switch off the following current N-PE	$I_{fi}$	0.1 kA
Response time L-N	$t_a$	100 ns
Response time N-PE	$t_a$	100 ns
TOV 5 s L-N		335 V
TOV characteristic (TOV 5 s)		withstand
TOV 200 ms N-PE		1 200 V
TOV characteristic (TOV 200 ms)		withstand
Cross-section of connected conductors solid (min)		2.50 mm <sup>2</sup>
Cross-section of connected conductors solid (max)		50.00 mm <sup>2</sup>
Cross-section of connected conductors stranded (min)		2.50 mm <sup>2</sup>
Cross-section of connected conductors stranded (max)		35.00 mm <sup>2</sup>
Cross-section of remote indication conductors solid (max)		1.5 mm <sup>2</sup>
Cross-section of remote indication conductors stranded (max)		1.5 mm <sup>2</sup>
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication		potential-free change-over contact
Remote indication contacts		250V/0,5A AC,250V/0,1A DC
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN 61643-11:2012, IEC 61643-11:2011
ETIM Class		EC000381
Plug module		FLP-25-T1-V/0 FLP-A100N V/0
Customs tariff number		85363090
EAN		8595090571148

Order number

A07114

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | [info@saltek.cz](mailto:info@saltek.cz) |  
[www.saltek.eu](http://www.saltek.eu)

Technická podpora: 800 818 818 | [podpora@saltek.cz](mailto:podpora@saltek.cz)

20.05.2024 -

02:16:08