

# FLP-12,5-VBH/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-(EV)12


- replacement module for FLP-(EV)12,5-VBH/x



Product dimensions

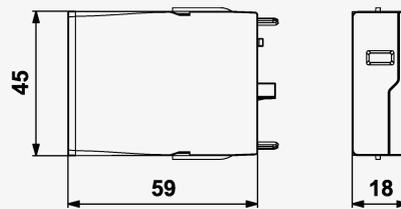

Basic circuit diagram



Parameter name		Parameter value
Type of SPD		T1,T2
Maximum operating voltage	$U_c$	275.00 V AC
Short-circuit current rating	$I_{SCCR}$	50.0 kA
Lightning impulse current (10/350 $\mu$ s)	$I_{imp}$	12.50 kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$	30.00 kA
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	60.00 kA
Test voltage	$U_{oc}$	10.0 kV
Voltage protection level	$U_p$	1.50 kV
Response time	$t_a$	100 ns
Fault indication		red indication field
Customs tariff number		85363030
EAN		8595090570509
Order number		A07050