

FLP-NPE-25-VH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement NPE module for FLP-1...-V.H/1.+1


- replacement NPE module for FLP-1...-V.H/1.+1



Product dimensions

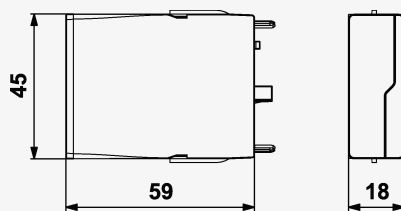

Basic circuit diagram



Parameter name		Parameter value
Type of SPD		T1,T2
Maximum operating voltage	U_c	255.00 V AC
Lightning impulse current (10/350 μ s)	I_{imp}	25.00 kA
Nominal discharge current (8/20 μ s)	I_n	30.00 kA
Maximum discharge current (8/20 μ s)	I_{max}	60.00 kA
Test voltage	U_{oc}	10.0 kV
Voltage protection level	U_p	1.50 kV
Ability to independently switch off the following current	I_{fi}	0.1 kA
Response time	t_a	100 ns
ETIM Class		EC000941
Customs tariff number		85363030
EAN		8595090570660
Order number		A07066