

FLP-NPE-25-VH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement NPE module for FLP-1...-V.H/1.+1


- replacement NPE module for FLP-1...-V.H/1.+1



Product dimensions

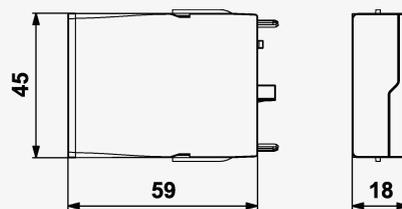

Basic circuit diagram



| Parameter name | | Parameter value |
|---|-----------|-----------------|
| Type of SPD | | T1,T2 |
| Maximum operating voltage | U_c | 255.00 V AC |
| Lightning impulse current (10/350 μ s) | I_{imp} | 25.00 kA |
| Nominal discharge current (8/20 μ s) | I_n | 30.00 kA |
| Maximum discharge current (8/20 μ s) | I_{max} | 60.00 kA |
| Test voltage | U_{oc} | 10.0 kV |
| Voltage protection level | U_p | 1.50 kV |
| Ability to independently switch off the following current | I_{fi} | 0.1 kA |
| Response time | t_a | 100 ns |
| ETIM Class | | EC000941 |
| Customs tariff number | | 85363030 |
| EAN | | 8595090570660 |
| Order number | | A07066 |