

# DL-1G-60V-POE-M

## SPD - for data, signalling and telecommunications lines / ICT / Ethernet and PoE - for 19" RACK


SPD for general structured cabling networks (Ethernet up to Cat.6)

for general structured cabling networks


- combination of coarse and fine protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected equipment, at the boundary of LPZ 0 a LPZ 1 or higher
- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage
- suitable for all PoE types - PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box



Product dimensions

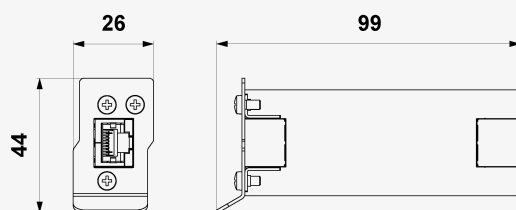

Basic circuit diagram



Parameter name		Parameter value
Type of SPD		<b>D1,C2,C3</b>
Location of SPD		<b>ST 1+2+3</b>
Mounting		<b>DL-PL-RACK-1U</b>
Maximum operating voltage core-core	<b><math>U_c</math></b>	<b>60,00 V DC</b>
Maximum operating voltage pair-pair (POE)	<b><math>U_c</math></b>	<b>60,00 V DC</b>
Nominal load current per core at 25 °C	<b><math>I_L</math></b>	<b>0.5 A</b>
Treshold frequency core-core	<b>f</b>	<b>250.00 MHz</b>
Insertion attenuation at treshold frequency		<b>1.50 dB</b>
C2 nominal discharge current (8/20 $\mu$ s) core-core	<b><math>I_n</math></b>	<b>0.15 kA</b>
D1 total discharge current (10/350 $\mu$ s) cores-PE	<b><math>I_{Total}</math></b>	<b>2.00 kA</b>
C2 total discharge current (8/20 $\mu$ s) cores-PE	<b><math>I_{Total}</math></b>	<b>10.00 kA</b>
C2 voltage protection level mode core-core (@ $U_{oc}/I_n$ )	<b><math>U_p</math></b>	<b>120,00 V (0,3 kV / 0,15 kA)</b>

C2 voltage protection level mode core-PE (@Uoc/In)	$U_p$	700,00 V (2,5 kV / 1,25 kA)
C2 voltage protection level mode pair-pair (POE) (@Uoc/In)	$U_p$	90,00 V (0,3 kV / 0,15 kA)
C3 voltage protection level mode core-core (@In - 1 kV/ $\mu$ s)	$U_p$	110,00 V (10 A)
C3 voltage protection level mode core-PE (@In - 1 kV/ $\mu$ s)	$U_p$	500,00 V (10 A)
C3 voltage protection level mode pair-pair (POE) (@In - 1 kV/ $\mu$ s)	$U_p$	85,00 V (10 A)
Response time core-core	$t_a$	1 ns
Response time core-PE	$t_a$	100 ns
Connection (input - output)		RJ 45/RJ 45
Degree of protection		IP 30 (without connectors IP 10)
Range of ambient temperatures (min/max)		-25 / 50 °C
Humidity		15 - 85 %
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC000943
Customs tariff number		85363010
EAN		8595090570851
Order number		A07085