

# FLP-12,5-075-VH/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-12


- replacement module for FLP-12,5-075-VH/x



### Product dimensions

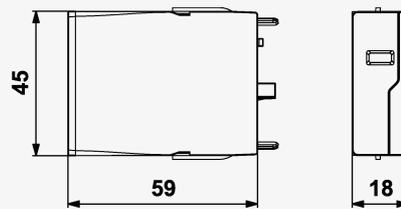

### Basic circuit diagram



Parameter name	Parameter value
Type of SPD	T1,T2
Maximum operating voltage	$U_c$ 75.00 V AC
Maximum operating voltage	$U_c$ 75.00 V DC
Short-circuit current rating	$I_{SCCR}$ 25.0 kA
Lightning impulse current (10/350 $\mu$ s)	$I_{imp}$ 12.50 kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$ 20.00 kA
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$ 40.00 kA
Voltage protection level	$U_p$ 0.45 kV
Response time	$t_a$ 25 ns
Fault indication	red indication field
ETIM Class	EC000381
Customs tariff number	85363030
EAN	8595090545712
Order number	A04571