

DA-275 DFI 1

SPD - for low voltage / SPD type 3 / With RFI filter


Surge protection with RFI filter

fault signalling due to power supply interruption


- surge protection with integrated RFI filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance
- protection priority



Product dimensions



Basic circuit diagram

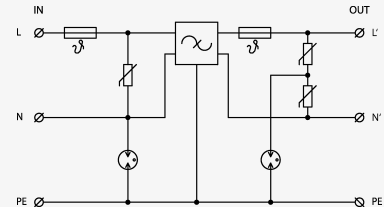

Parameter name	Parameter value
Type of SPD	T3
Mounting	DIN rail 35 mm
Nominal voltage	U_n 230.00 V AC
Maximum operating voltage	U_c 275.00 V AC
Nominal load current	I_L 1.000 A
Type of network	TN
Maximum overcurrent protection	1 A gL/gG or C 1 A
Filter attenuation at 1 MHz (50 Ω /50 Ω) unsymmetrical	50 dB
Nominal discharge current (8/20 μ s) L-N	I_n 1.50 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 1.50 kA
Test voltage L-N	U_{oc} 3.0 kV
Test voltage N-PE	U_{oc} 3.0 kV
Voltage protection level mode L-N	U_p 1.20 kV
Voltage protection level mode N-PE	U_p 1.20 kV
Response time L-N	t_a 25 ns
Response time N-PE	t_a 100 ns

Cross-section of connected conductors solid (max)	4.00 mm ²
Cross-section of connected conductors stranded (max)	2.50 mm ²
Fault indication	supply interruption
Remote indication	no
Degree of protection	IP 20
Range of ambient temperatures (min/max)	-40 / 80 °C
Humidity	5 - 95 %
According to standard	EN 61643-11:2012, IEC 61643-11:2011
ETIM Class	EC000942
Customs tariff number	85363010
EAN	8595090512059
Order number	A01205

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | info@saltek.cz | www.saltek.eu
 Technická podpora: 800 818 818 | podpora@saltek.cz

17.06.2026 -
10:28:32