


DM-024/1 3L DJ

SPD - for data, signalling and telecommunications lines / I&C / ST2+3 (DM) - compact

Surge protection for 3-core signalling lines
coupling impedance (L – inductance)

- coarse and fine surge protection for 3-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

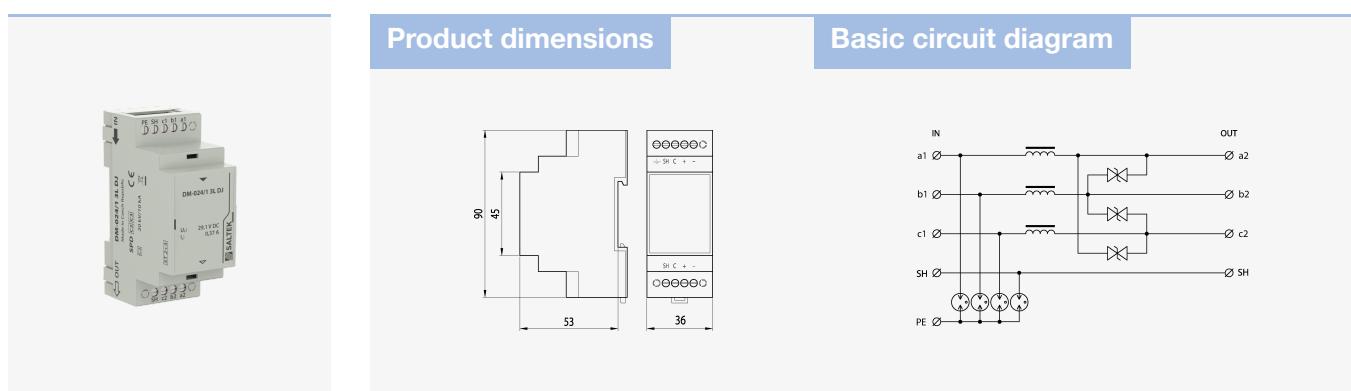

Parameter name	Parameter value
Type of SPD	C2,C3
Location of SPD	ST 2+3
Mounting	DIN rail 35 mm
Nominal voltage U_n	24 V DC
Maximum operating voltage U_c	20.60 V AC
Maximum operating voltage U_c	29.10 V DC
Nominal load current I_L	0.370 A
Threshold frequency core-core f	0.16 MHz
Serial inductance per core L	100.00 μ H
C2 nominal discharge current (8/20 μ s) per core I_n	10.00 kA
C2 voltage protection level mode core-PE at In U_p	350 V

C2 voltage protection level mode core-core at In	U_p	50 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p	650 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p	40 V
Response time core-core	t_a	1 ns
Response time core-PE	t_a	100 ns
Connection (input - output)		terminals-terminals
Cross-section of connected conductors solid (max)		4.00 mm ²
Cross-section of connected conductors stranded (max)		2.50 mm ²
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC001625
Customs tariff number		85363010
EAN		8595090515197
Order number		A01519

SALTEK s.r.o., Dráždanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | info@saltek.cz | www.saltek.eu

Technická podpora: 800 818 818 | podpora@saltek.cz

17.07.2025 -
15:09:41