


FLP-12,5 V/1

SPD - for low voltage / SPD type 1 / MOV

Lightning current and surge arrester for systems TN and TT
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages

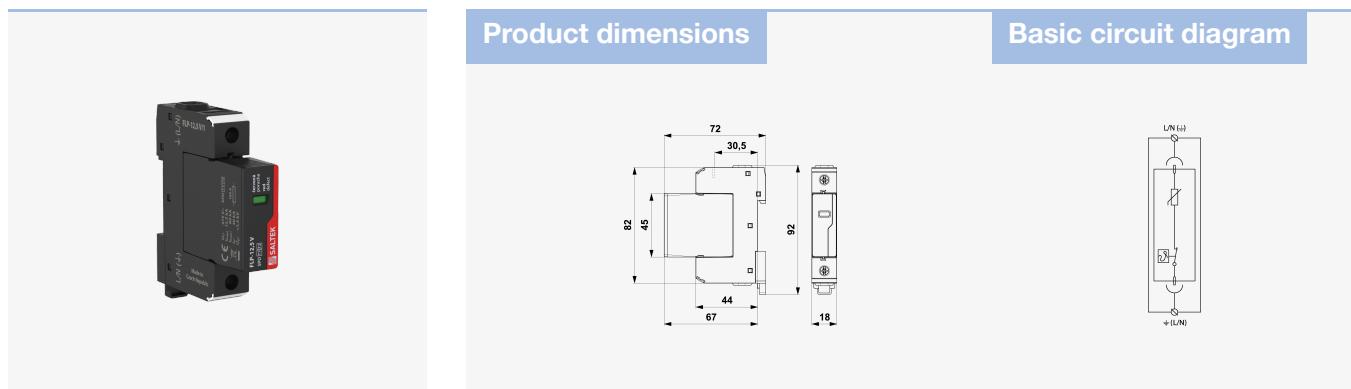

Parameter name	Parameter value	
Type of SPD	T1,T2	
Mounting	DIN rail 35 mm	
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275.00 V AC
Maximum operating voltage	U_c	350.00 V DC
Type of network	TN	
Maximum overcurrent protection	160 A gL/gG	
Short-circuit current rating	I_{SCCR}	50.0 kA
Lightning impulse current (10/350 µs)	I_{imp}	12.50 kA
Nominal discharge current (8/20 µs)	I_n	30.00 kA
Maximum discharge current (8/20 µs)	I_{max}	60.00 kA
Voltage protection level	U_p	1.50 kV
Voltage protection level at 5 kA	U_p	0.90 kV
Response time	t_a	25 ns
TOV 5 s L-N	335 V	
TOV characteristic (TOV 5 s)	withstand	
Cross-section of connected conductors solid (min)	1.00 mm²	

Cross-section of connected conductors solid (max)	35.00 mm ²
Cross-section of connected conductors stranded (min)	1.00 mm ²
Cross-section of connected conductors stranded (max)	25.00 mm ²
Fault indication	red indication field
Degree of protection	IP 20
Range of ambient temperatures (min/max)	-40 / 80 °C
Humidity	5 - 95 %
According to standard	EN 61643-11:2012, IEC 61643-11:2011
ETIM Class	EC001457
Plug module	FLP-12,5 V/0
Customs tariff number	85363090
EAN	8595090534211
Order number	A03421

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | info@saltek.cz | www.saltek.eu

Technická podpora: 800 818 818 | podpora@saltek.cz

17.07.2025 -
12:37:16