

FLP-SG50 VS/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-SG50 VS


- replacement module for FLP-SG50 VS, remote fault signalling



Product dimensions

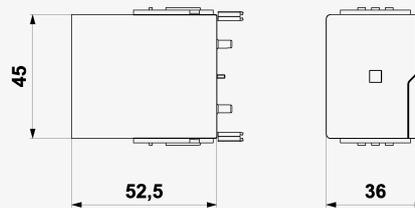

Basic circuit diagram



| Parameter name | Parameter value |
|---|-------------------------------------|
| Type of SPD | T1 |
| Maximum operating voltage | U_c 255.00 V AC |
| Short-circuit current rating | I_{SCCR} 50.0 kA |
| Lightning impulse current (10/350 μ s) | I_{imp} 50.00 kA |
| Nominal discharge current (8/20 μ s) | I_n 50.00 kA |
| Voltage protection level | U_p 2.50 kV |
| Ability to independently switch off the following current | I_{fi} 50.0 kA |
| Response time | t_a 100 ns |
| Fault indication | red indication field |
| According to standard | EN 61643-11:2012, IEC 61643-11:2011 |
| ETIM Class | EC000941 |
| Customs tariff number | 85363090 |
| EAN | 8595090541486 |
| Order number | A04148 |