

# SX-090-F75-F/F


## SPD - for data, signalling and telecommunications lines / Coaxial lines / ST2 (SX)

Surge arrester for protection of sensitive coaxial inputs of commercial receivers 75 Ohm  
F connectors 75 ohm


- surge arrester, shielding connected to protective grounding
- installation close to protected equipment
- for protection of sensitive coaxial inputs of commercial receivers (TV/SAT)



Product dimensions

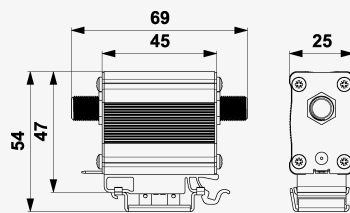

Basic circuit diagram

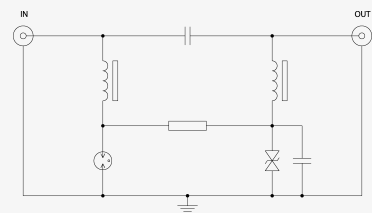

Parameter name		Parameter value
Type of SPD		D1,C2,C3
Location of SPD		ST 1+2+3
Mounting		DIN rail 35 mm
Maximum operating voltage	$U_c$	26.00 V DC
Nominal load current	$I_L$	0.700 A
Frequency range	$f$	0,00 - 2300,00 MHz
Impedance	$Z$	75 $\Omega$
Insertion loss		1.50 dB
VSWR typ. (max.)	VSWR	1,7
D1 impulse discharge current (10/350 $\mu$ s) core-PE	$I_{imp}$	0.50 kA
C2 nominal discharge current (8/20 $\mu$ s) core-PE	$I_n$	2.50 kA
Dynamic spark-over voltage at 1kV/ $\mu$ s	$U_{dyn}$	85.00 V
Response time core-PE	$t_a$	1 ns
Connection (input - output)		F 75
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 $^{\circ}$ C
Humidity		5 - 95 %

According to standard	<b>EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012</b>
ETIM Class	<b>EC001625</b>
Customs tariff number	<b>85363010</b>
EAN	<b>8595090541585</b>
Order number	<b>A04158</b>

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | [info@saltek.cz](mailto:info@saltek.cz) | [www.saltek.eu](http://www.saltek.eu)  
Technická podpora: 800 818 818 | [podpora@saltek.cz](mailto:podpora@saltek.cz)

09.05.2025 -  
11:49:48