


# DMJ-012/2-RS

## SPD - for data, signalling and telecommunications lines / I&C / ST2+3 (DM) - terminal block


Surge protection for two 1-core signalling networks

coupling impedance (resistance), screw terminals

- coarse and fine surge protection for two 1-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and control circuits of I&C, electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in common mode (core – PE)

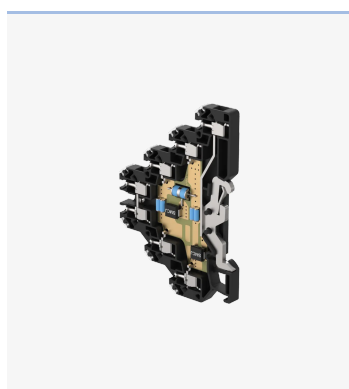


Product dimensions



\*1 - síla svorky bez vřetla  
\*\*7 - síla svorky s vřetlem

Basic circuit diagram



Parameter name	Parameter value
Type of SPD	<b>C2,C3</b>
Location of SPD	<b>ST 2+3</b>
Mounting	<b>DIN rail 35 mm</b>
Nominal voltage	$U_n$ <b>12.00 V DC</b>
Maximum operating voltage	$U_c$ <b>11.00 V AC</b>
Maximum operating voltage	$U_c$ <b>16.00 V DC</b>
Nominal load current	$I_L$ <b>0.500 A</b>
Threshold frequency core-core	$f$ <b>2.00 MHz</b>
Serial resistance per core	$R$ <b>2.20 <math>\Omega</math></b>
D1 impulse discharge current (10/350 $\mu$ s) per core	$I_{imp}$ <b>0.50 kA</b>
D1 total discharge current (10/350 $\mu$ s) cores-PE	$I_{Total}$ <b>1.00 kA</b>

C2 nominal discharge current (8/20 $\mu$ s) per core	$I_n$	5.00 kA
C2 total discharge current (8/20 $\mu$ s) cores-PE	$I_{Total}$	10.00 kA
C2 voltage protection level mode core-PE at $I_n$	$U_p$	40.00 V
C3 voltage protection level mode core-PE at 1 kV/ $\mu$ s	$U_p$	20.00 V
Response time core-PE	$t_a$	1 ns
Connection (input - output)		terminals-terminals
Cross-section of connected conductors solid (min)		0.14 mm <sup>2</sup>
Cross-section of connected conductors solid (max)		4.00 mm <sup>2</sup>
Cross-section of connected conductors stranded (min)		0.14 mm <sup>2</sup>
Cross-section of connected conductors stranded (max)		2.50 mm <sup>2</sup>
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 70 °C
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC001625
Customs tariff number		85363010
EAN		8595090551447
Order number		A05144