

FLP-ZP-7,5-VBH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-ZP.-7


- replacement module for FLP-ZP.-7,5-VBH...



Product dimensions

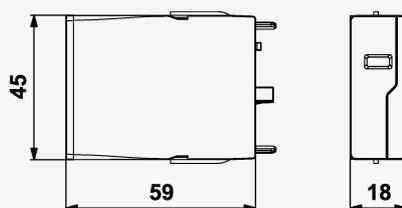

Basic circuit diagram



Parameter name	Parameter value
Type of SPD	T1,T2,T3
Maximum operating voltage	U_c 255.00 V AC
Short-circuit current rating	I_{SCCR} 25.0 kA
Lightning impulse current (10/350 μ s)	I_{imp} 7.50 kA
Nominal discharge current (8/20 μ s)	I_n 20.00 kA
Maximum discharge current (8/20 μ s)	I_{max} 60.00 kA
Test voltage	U_{oc} 10.0 kV
Voltage protection level	U_p 1.50 kV
Response time	t_a 100 ns
Fault indication	red indication field
According to standard	EN 61643-11:2012, IEC 61643-11:2011
ETIM Class	EC000941
Customs tariff number	85363090
EAN	8595090566298
Order number	A06629