

FLP-ZP-12,5-VBH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-ZP.-12


- replacement module for FLP-ZP.-12,5-VBH...



Product dimensions

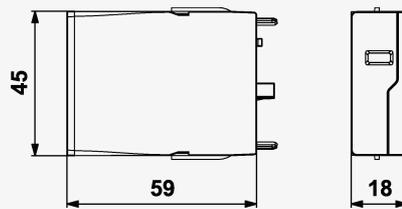

Basic circuit diagram



| Parameter name | Parameter value |
|--------------------------------------------|-------------------------------------|
| Type of SPD | T1,T2,T3 |
| Maximum operating voltage | U_c 255.00 V AC |
| Short-circuit current rating | I_{SCCR} 25.0 kA |
| Lightning impulse current (10/350 μ s) | I_{imp} 12.50 kA |
| Nominal discharge current (8/20 μ s) | I_n 20.00 kA |
| Maximum discharge current (8/20 μ s) | I_{max} 60.00 kA |
| Test voltage | U_{oc} 10.0 kV |
| Voltage protection level | U_p 1.50 kV |
| Response time | t_a 100 ns |
| Fault indication | red indication field |
| According to standard | EN 61643-11:2012, IEC 61643-11:2011 |
| ETIM Class | EC000941 |
| Customs tariff number | 85363090 |
| EAN | 8595090566304 |
| Order number | A06630 |