



POWERED BY YOU
1995 – 2025

SALTEK®

Catalogue Surge Protective Devices

2025–2026



Content

General

Who we are, What we do	4
Solutions for complex surge protection	5
SALTEK® on-line	6
Features of SALTEK® surge arresters	7
Information – safety, ecology, legislation	8

SPDs connected to LV power supply systems up to 1000 V

SPDs Type 1 and Type 1 and 2 - lightning current arresters	19
SPDs Type 1 and 2 - combined lightning current and surge arresters	32
SPDs Type 2 - surge arresters	53
SPDs Type 3 - surge protections	71

Surge Protective Devices for LED lights

Surge Protective Devices for LED lights	91
---	----

Surge Protective Devices for photovoltaic systems

PV SPDs Type 1 and 2	99
PV SPDs Type 2	102

SPDs for data / signalling / telecommunication networks

Devices with pluggable module	113
Compact devices	137
Terminal blocks with screw terminals	151
Terminal blocks with screwless terminals	159
SPDs for phone lines	167
SPDs for Ethernet networks	171
Multichannel SPDs for Ethernet networks	177
SPDs for devices with coaxial interfaces	187

Isolating Spark Gaps

Isolating Spark Gaps ISG and ISG Ex	199
-------------------------------------	-----

Digital SPD tester

GIGATESTpro - SALTEK	209
----------------------	-----

Index of SALTEK® products

By type	211
By order number	213

Who we are

What we do

SALTEK® is a leading Czech based company specialising in the development and production of Surge Protective Devices. SALTEK® offers a complete range of SPDs (Types 1, 2, 3 and its combinations) in areas of low-voltage power systems and installations, renewable energy, information technologies, measuring & regulation and telecommunications.

SALTEK® products provide protection against atmospheric and technological overvoltage and ensure safe and trouble-free operation of technology, machinery and electrical appliances in industry, transport, telecommunications, data centres, office buildings as well as households.



30 years of successful history

- We have been on the market since 1995 and our products protect technologies in Europe, Asia and Africa.



Own development = basis for growth

- We build our development on innovation and self-development. Our experienced team works in a modern laboratory with unique technologies, that enable rapid and high-quality development.



Flexibility and speed

- We offer customized solutions as well as ODM/OEM products.



Customers as inspiration

- With hands-on experience and technical innovation, we provide comprehensive surge protection, supported by supported by technical service, training and marketing.



Quality and standards

- We are committed to safety and reliability according to ISO 9001, 14001 and 45001. We are members of standard setting bodies of the future (IEC, CENELEC).



POWERED BY YOU

1995 – 2025

March 28, 2025 marks the 30th anniversary of SALTEK's founding. Since its beginnings, the company has been built on continuous innovation, orientation customer-oriented and customer-oriented, which has led to rapid growth in turnover, expansion of the team and a significant market position in the Czech Republic and Slovakia.

SALTEK products have become a key element of safety and reliability of electrical and electronic equipment across various industries. They enable hospitals to heal, trains to run, production lines to produce and homes to function.

But the key pillars of the company's growth continue to be the employees, customers and business partners who support its journey to success.

Thank you for your support and we look forward to continued success together!



What we do

Solutions for complex surge protection

We combine technical innovation with expertise. Thanks to our customers' feedback and our own development, SALTEK® products provide solutions for complex surge protection for various applications in different areas.

	INDUSTRIES	Very sophisticated systems are used in industrial buildings, which are susceptible to abnormalities caused by overvoltages in power networks and signal lines.
	TELECOMMUNICATION	Telecommunication and radio-communication systems are located in very exposed locations where they must withstand atmospheric phenomena during their lifetime.
	BUILDINGS	A large number of sensitive technologies are located in residential and commercial buildings and appliances. SALTEK® products significantly increase their reliability and thus significantly enhance the user comfort of the building.
	WINDMILLS	Modern green energy sources. By their design and location exposed to the generation of overvoltages by direct or indirect lightning strikes. Essential protection against overvoltage.
	DATA CENTRES	In the era of information technology, data centres or server rooms are an essential part of life and the data stored is critically important. Unavailability or complete loss of data can have catastrophic consequences both in industry and in everyday life.
	ELECTROMOBILITY	The emerging electric mobility needs a wide network of charging stations with secure and trouble-free operation. Given the location of the stations, it is essential to ensure the operation of overvoltage protection using SALTEK® surge protectors is required.
	CAMERA SYSTEMS	The action of surge pulses causes increased stress or destruction of the electronic circuits of the camera system and other electrical equipment, which greatly shortens their life cycle and reliability.
	ELECTRONIC DETECTION SYSTEMS	Electronic security systems are an integral part of all critical systems. They secure critical infrastructure, data, technological units, etc. and thus indirectly the safety of people, important processes, production, assets, etc.
	RAILWAY SYSTEMS	In rail transport, the most important requirement for equipment is the safety of people. The prevention of unacceptably high touch voltages and the limitation of overvoltages are guaranteed by the products SALTEK® VLD.
	PHOTOVOLTAIC SYSTEMS	Due to their location, PV systems must be able to withstand severe weather conditions. SALTEK® products provide the best protection against transient overvoltages phenomena for trouble-free operation throughout their lifetime.
	PIPELINES	Very extensive systems that are exposed to the adverse effects of lightning strikes, Induction from HV, MV or stray currents near railways. These phenomena have a negative impact on the technologies required for their trouble-free operation.
	EMERGENCY LIGHTING SYSTEMS	Emergency escape route lighting is a mandatory part of all commercial buildings. The design of the systems is basically of two types - with central power supply and battery backup or with sectional stand-alone luminaires with internal backup power supplies.
	LED LIGHTS	Public lighting installations tend to be large and their cable lengths can reach hundreds of metres. This increases the risk of induced lightning surges, faults and switching in distribution networks.
	ENERGY STORAGE	Along with the development of renewable energy sources and smart grids, the demand for efficient electricity storage is growing. This can be partly provided by electricity storage, which needs to be protected from surges.
	FAMILY HOUSES	Modern televisions, computers and security systems are now commonplace of both the small family home and the luxury villa. But all this can be destroyed by a lightning strike and power surges coming down the line.

SALTEK® on-line

Product information always at hand



If you do not have our Catalogue available or further printed information you would be interested in, visit www.saltek.eu/en to see a comprehensive overview of our products and on-line support.

What can you find at www.saltek.eu/en?



Online catalogue and manuals

- Always the most up-to-date information on the SALTEK® range of protectors
- Generation of a product-specific catalogue/product sheet into PDF for printing and saving
- Complete technical data
- Dimensional drawings, wiring diagrams and manuals
- Declaration of Conformity



Technical support

- For project solutions and optimization as well as designing additional solutions in existing buildings. We offer a wide range of support in the field of indoor lightning protection according to the set of standards CSN EN 62305.
- Fill in the form on our website.



Application of selection of suitable protections

On-line tool for selecting specific suitable products for a given application.

- Protection selection for low voltage systems
- Protection selection for data/signal/telecom networks



Training for professionals

A complete range of training courses for designers, electrical contractors and other interested parties with dates and venues.

- Webinars including recordings on our YouTube channel FREE

Keep in touch with us not only through our website, but also on social media. You can find us on [Facebook](#), [LinkedIn](#), [YouTube](#) and [Instagram](#), where we regularly share interesting news, planned events, information about our products and services, as well as moments from our company life.

Thanks to our posts, you won't miss anything important, plus you'll get a glimpse behind the scenes of our work and get inspired.

Just scan the QR codes below to join us and become part of our online community.
We look forward to seeing you there!



Facebook



LinkedIn




YouTube



Instagram

Features of SALTEK® surge arresters

Example: SLP-275 V/3S+1

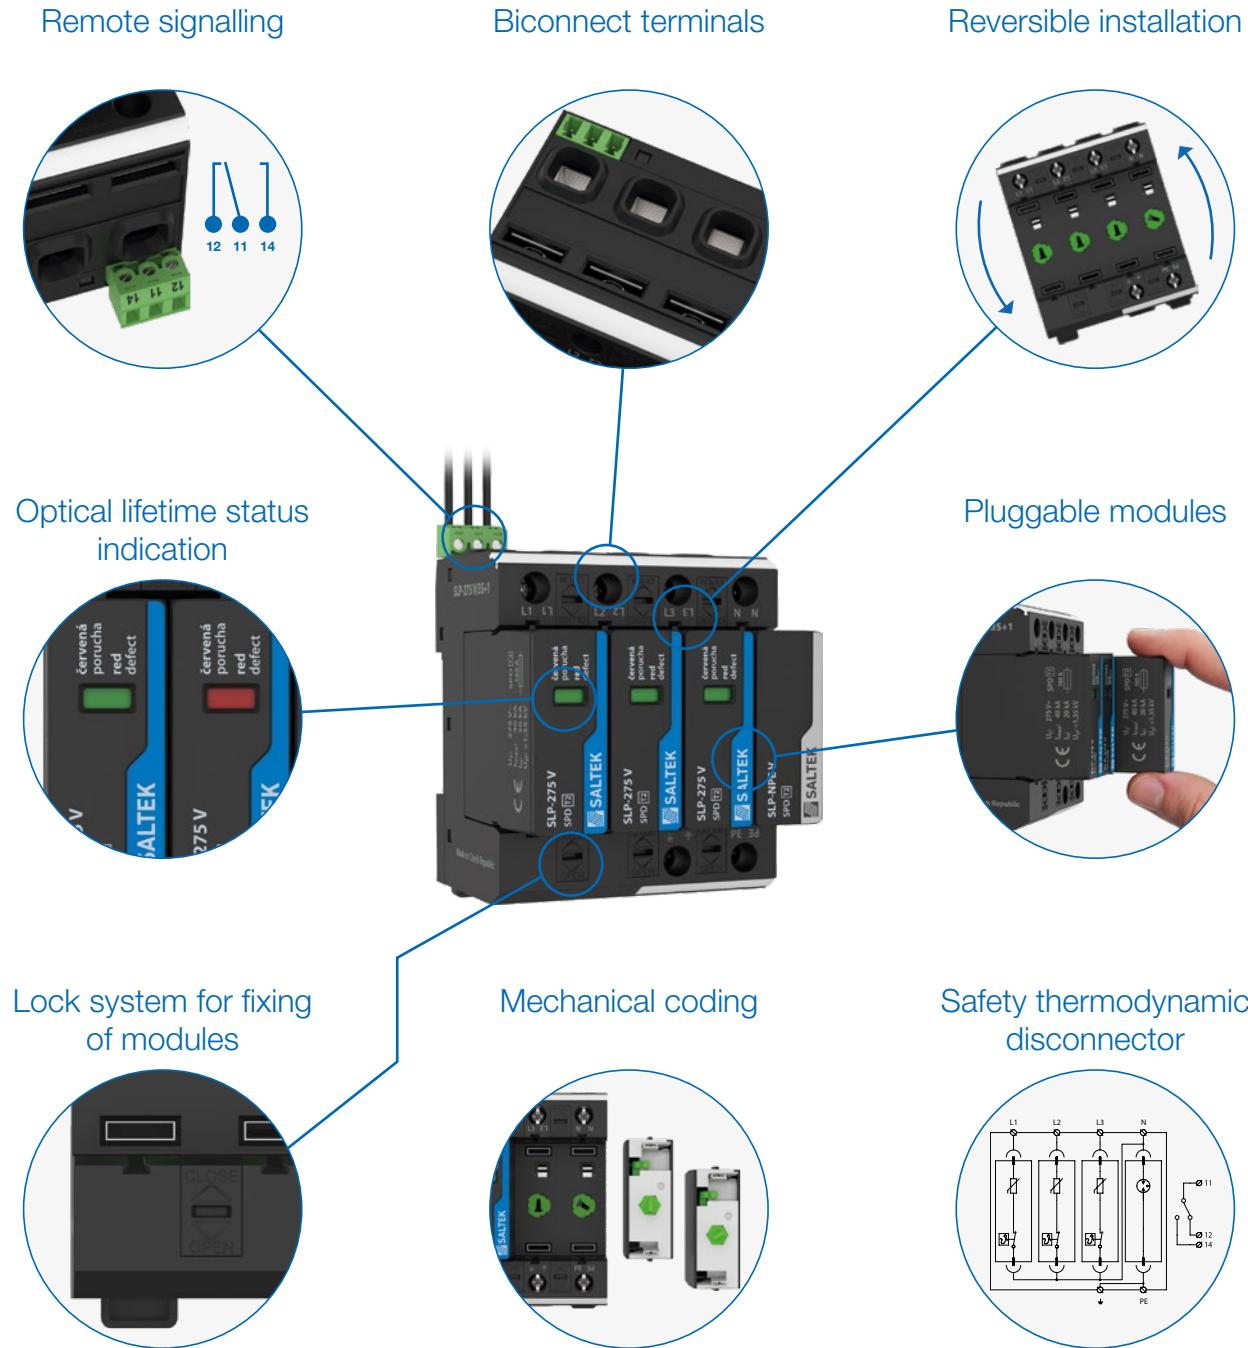

SPD Type 1 and SPD Type 1 and 2. FLP series



SPD Type 2. SLP series



SPD Type 3, e.g., DA series



PV SPD Type 2. SLP series for photovoltaic applications



PV SPD Type 1 and 2. FLP series for photovoltaic applications



SPD for data/signal/telecommunication networks

Module marking = easy to identify

To identify arresters in the distribution board easily, SALTEK® pluggable modules and SPDs are marked in colour so it is easy for customers to identify the type of SPD installed in their distribution board.



"N-PE" modules

Information

Safety, ecology, legislation



Safety notice

The products operate with life-threatening electrical voltages. Only a person with appropriate electrical qualification may install the devices. Before installation, the relevant electrical circuit must be disconnected from all sources of electrical power.



Environmental warnings

Products marked with graphic symbol of a crossed-out underlined bin are e-waste within the meaning of the EU Regulation (2012/19/EU). The product must be disposed of in an environmentally sound manner within the framework of take-back (withdrawal), i.e. it must be disposed of at a designated place. The materials and technological procedures used are in compliance with the requirements of Directive 2011/65/EU of the European Parliament and of the Council (RoHS) and Regulation 1907/2006/EC of the European Parliament and of the Council (REACH) in their latest valid version.



Legal notice

FLP, FLP-B+C MAXI, SLP, HX, SX, FX are trademarks of SALTEK s.r.o.

Subject to change. The current offer and product parameters can be found at www.saltek.eu in the "Products" section.

SPDs connected to LV power supply systems up to 1 000 V



- Office and commercial buildings
 - Industrial buildings and installations
 - Energy distribution
 - Residential buildings
 - Smart buildings
- SPD Type 1 – Lightning Current Arresters
 - SPD Type 1 and 2 – Lightning Current Arresters
 - SPD Type 2 – Surge Arresters
 - SPD Type 3 – Surge Protections

Lightning and surge protection

1. Introduction – Legislative

The use of modern sophisticated equipment, consumer electronics and control systems places high demands on their electromagnetic compatibility. Modern electronic control systems provided with circuits with a very high integration level are becoming more and more sensitive to electromagnetic disturbance and overvoltage. The installation of surge protections according to effective legal standards will reduce the danger of their being damaged to a minimum. Technical designs are defined by standards harmonised with EU standards:

- Protective bonding to the same potential including the conductor cross section for the main and additional bonding is defined by standards **EN 50310 ed. 4.**, **IEC (EN) 60364-5-54**, **IEC (EN) 60364-4-41**
- Lightning protection is specified in the standard **IEC (EN) 62305**, harmonised with European standards. **IEC (EN) 62305-1** deals with general principles.

Lightning protection level	Maximum lightning parameter according to LPL
LPL	First short discharge
LPL I	200 kA
LPL II	150 kA
LPL III	100 kA
LPL IV	100 kA


IEC (EN) 62305-2 – deals with the risk assessment for buildings or engineering networks struck by lightning.

IEC (EN) 62305-3 – deals with the proposal for external lightning protection (lightning conductor).

IEC (EN) 62305-4 – deals with protective measures resulting in the reduction of failures of electrical and electronic systems inside the building (zone protection)

- Classification of protections is set forth in standard **IEC (EN) 61643-11**. Devices are classified into three basic categories:
 - SPD Type 1 – lightning current arresters
 - SPD Type 2 – surge arresters
 - SPD Type 3 – surge arresters
- Classification of low-voltage distribution into impulse resistance categories, including specification of the maximum allowed overvoltage is determined in standard **IEC (EN) 60664-1**

Example of main and additional bonding

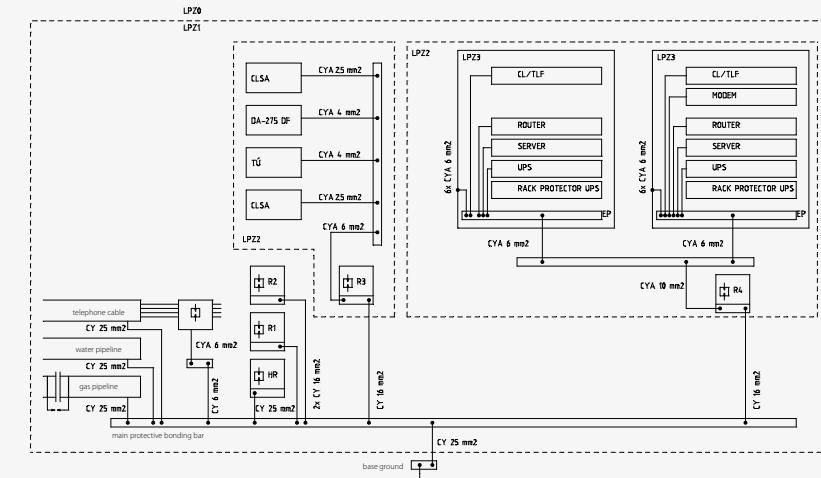

Lightning protection zones

The standard IEC (EN) 62305-4 defines lightning protection zones LPZ in view of the direct and indirect (electromagnetic pulse – LEMP) lightning effect:


LPZ 0_A – free area (possibility of a direct lightning strike, non-attenuated LEMP)

LPZ 0_B – lightning conductor receiver protection area (direct lightning strike protection, non-attenuated LEMP)


LPZ 1 – inside a building (direct lightning strike is eliminated, attenuated LEMP – depending upon shielding)

LPZ 2 – inside a room – e.g. a server room with a conductive floor, FeAl floors and wall lining (further attenuation of LEMP in connection with a higher shielding level)


LPZ 3 – inside a metal box (e.g. 19" RACK)

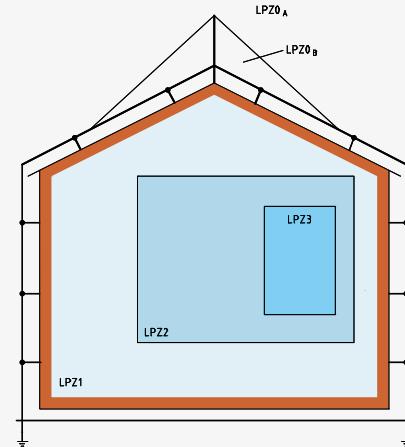

Rated impulse for equipment (acc. to IEC (EN) 60664-1) or Impulse-withstand voltage.

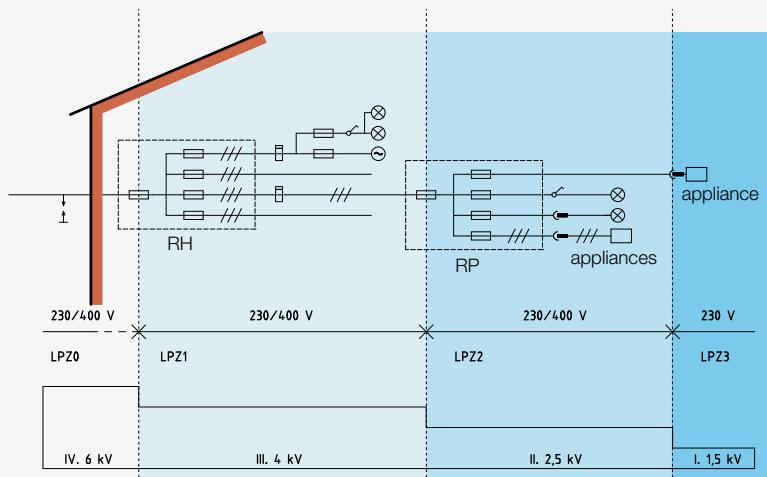

2. Connection of surge protective devices in networks

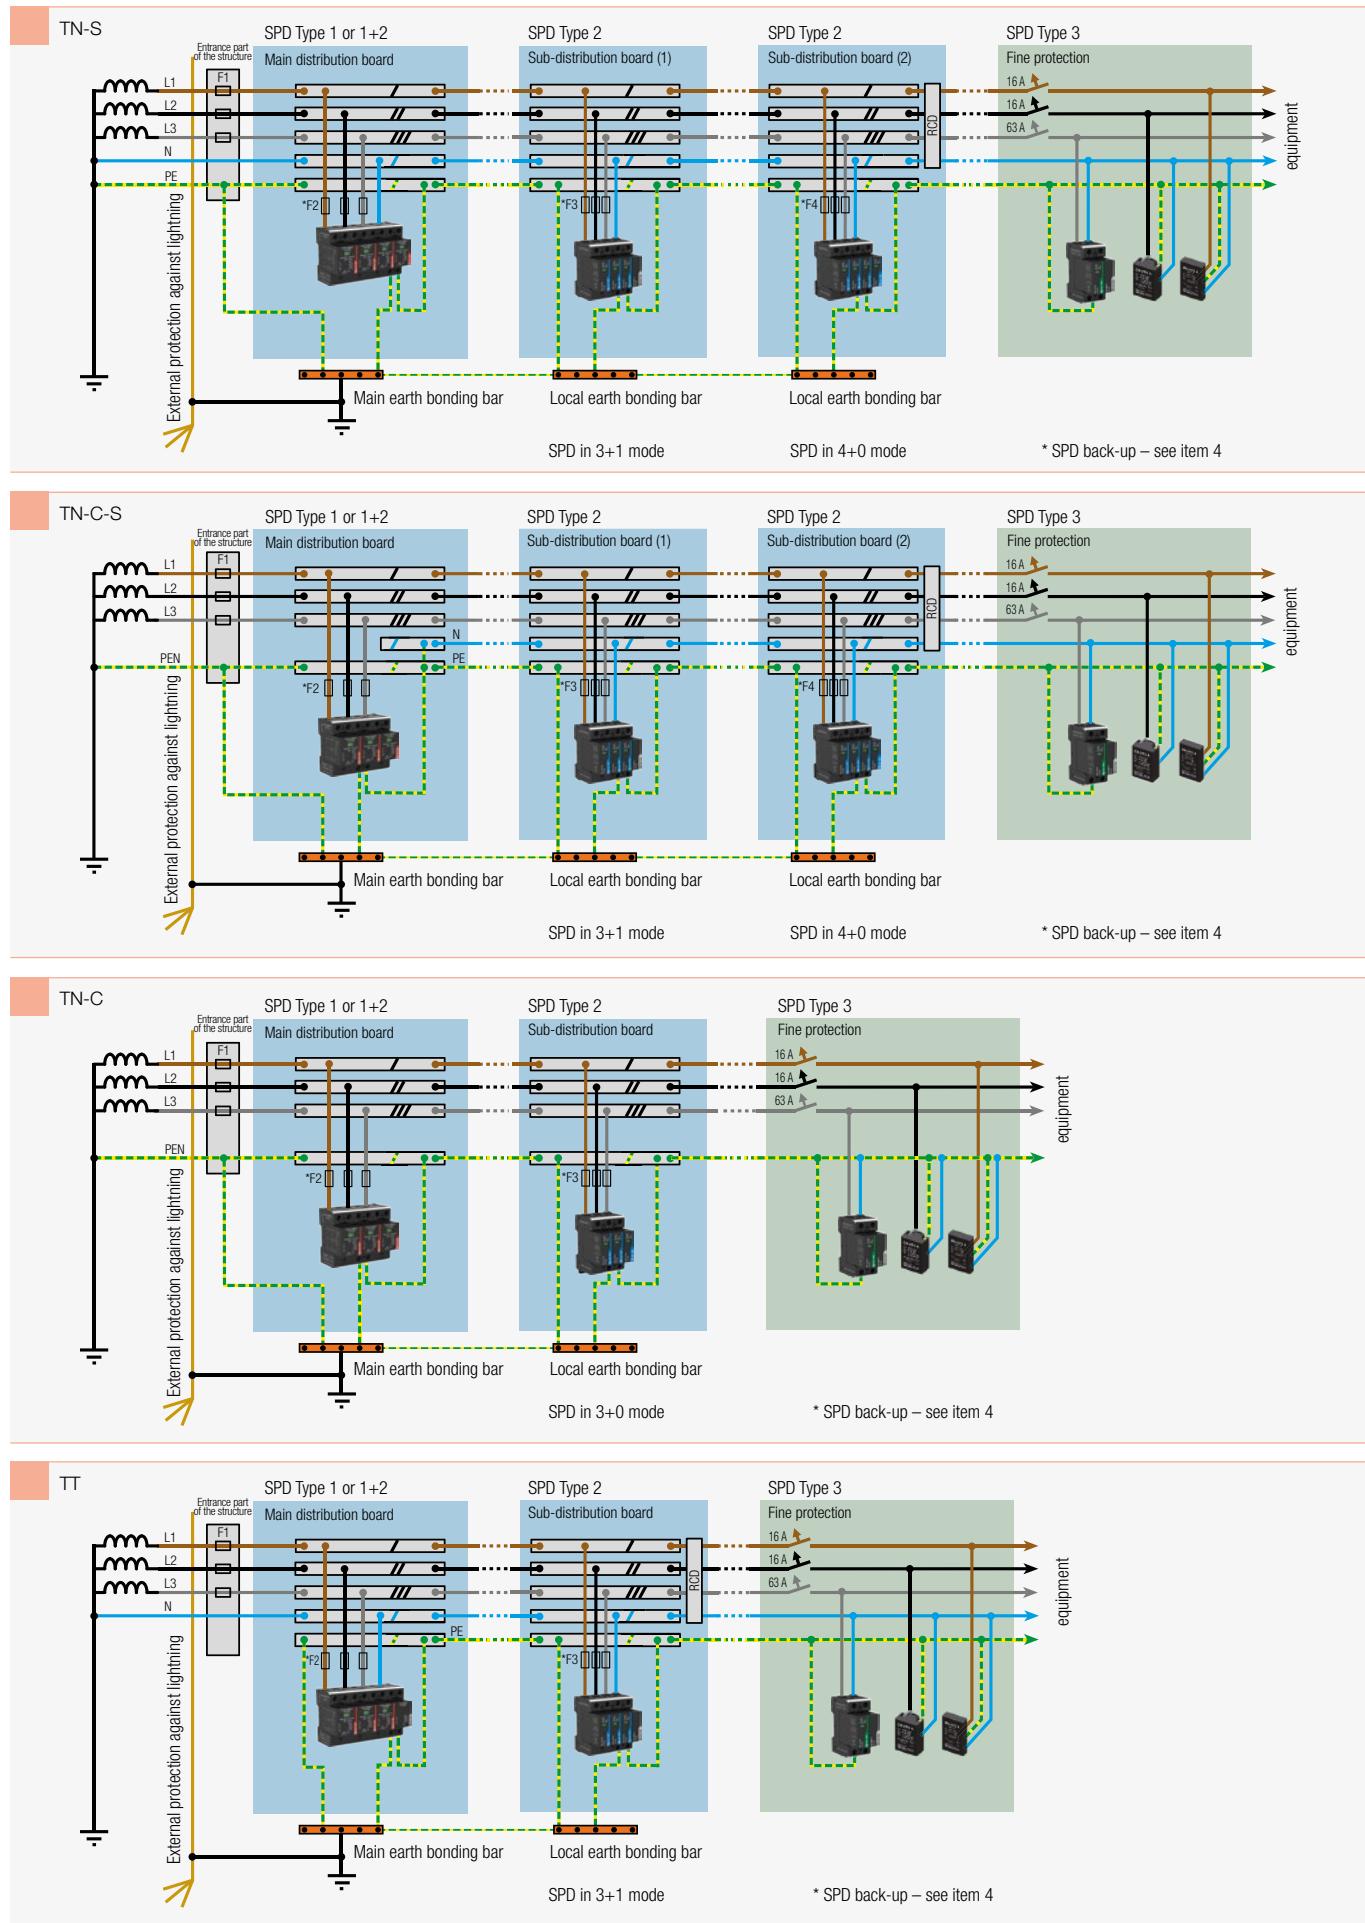

3. SPD dimensioning and their application

Sizing SPD Type 1 IEC (EN) 62305		
Location of SPD Type 1: at the boundary of LPZ0 and LPZ1 zones in main distribution board		
LPL	Lightning	Total SPD
I.	to 200 kA	100 kA
II.	to 150 kA	75 kA
III.	to 100 kA	50 kA
IV.	to 100 kA	50 kA

Application of SALTEK SPD Type 1 IEC (EN) 62305		
Location of SPD Type 1: at the boundary of LPZ0 and LPZ1 zones in main distribution board		
LPL	Lightning	Total SPD
I.	to 200 kA	100 kA

Conditions met by:

FLP-SG50 V(S)/1

- large industrial facilities
- structures of special importance
- technological facilities
- administrative structures

FLP-B+C MAXI V(S)

- administrative structures
- civic amenities
- family houses
- near transformer stations

FLP-25-T1-V(S)

FLP-12,5 V(S)

- family houses w/o down conductor system with a cable connector in the housing and in the LPS III class
- structures in LPS IV class, i.e. structures and halls without persons and interior equipment, structures only with heavy current wiring

FLP-12,5 V(S)

- on LV earthing supply cables to the structure where the connection is not directly to the public distribution network (i.e. interconnection between 2 structures)
- to sub-distribution boards within the structure, with a cable length from the last SPD of over 50 m

Application of SALTEK SPD Type 2 IEC (EN) 62305		
Location of SPD Type 2: at the boundary of LPZ1 and LPZ2 zones or sub-distribution board		
Conditions met by:		
SLP-xxx	- all types of wiring	- type of network (TN, IT, T T)
	- connection method	- nominal voltage


Application of SALTEK SPD Type 3 IEC (EN) 62305		
Location of SPD Type 3: at the boundary of LPZ2 and LPZ3 zones (technology)		
Conditions met by:		
DA-275 (DIN rail version)	- all types of wiring (if the equipment is in the clamp or distribution board)	
DA-275..., CZ...	- all types of wiring (sockets with overvoltage protection at the shortest possible distance from the appliance)	
xxx-OVERDRIVE	- all types of wiring adapters for plugs with overvoltage protection	



4. Principle of overcurrent protection of SPD

The SPD should be provided with additional protection in this case only if the value of the line protection (F1 fuse) is higher than the value of the respective SPD shown in the catalogue (F2 fuse) and the SPD protection always has the value shown in the manufacturer's catalogue (parameter – maximum additional protection).

An example of back-up fuse for SPD – FLP-B+C MAXI V – in different supply networks.

The catalogue value of maximum back-up fuse for FLP-B+C MAXI V is 250 A, and 125 A for the "V" connection.

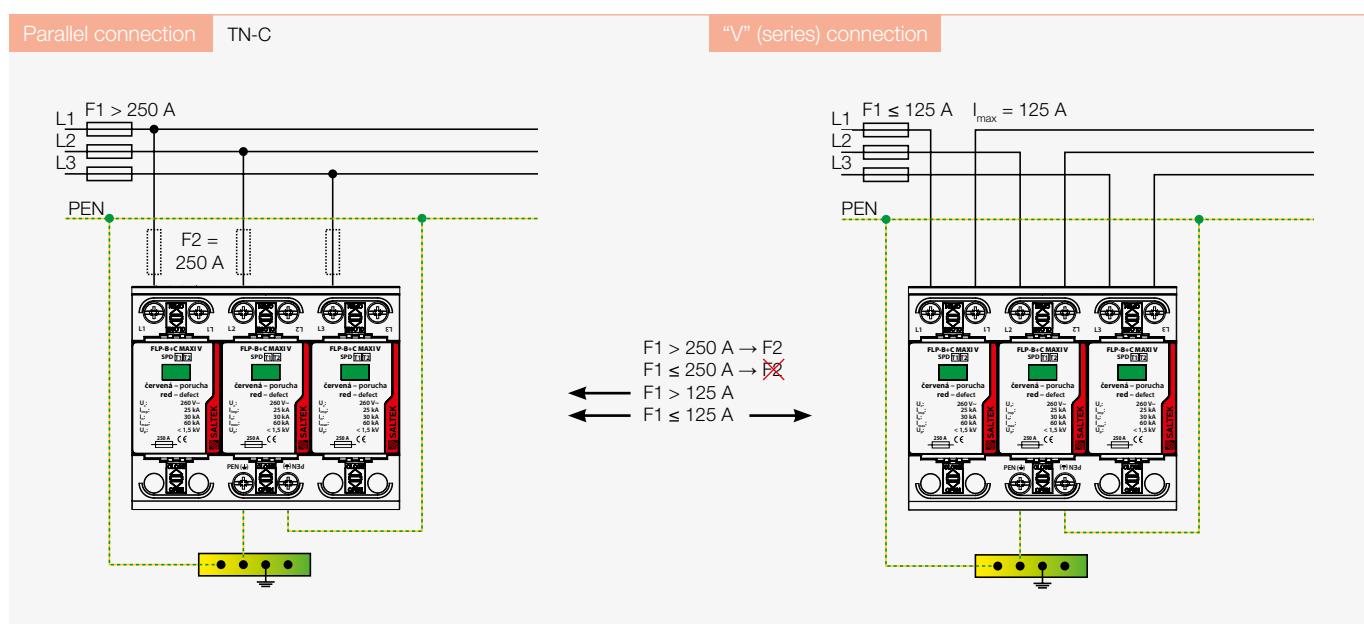

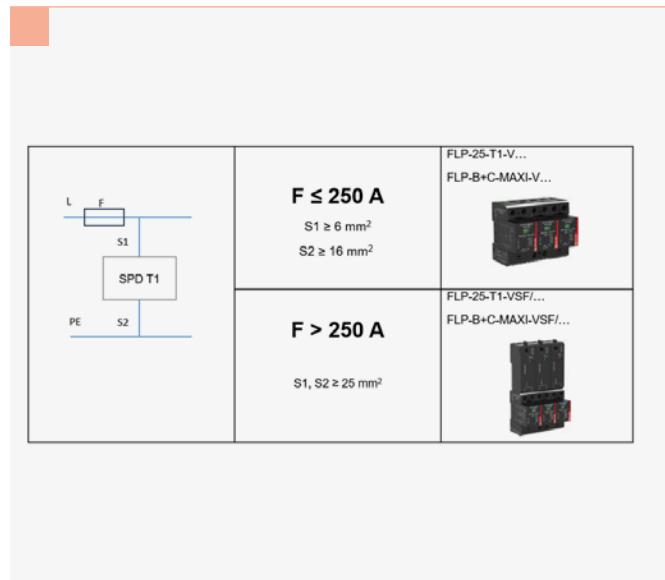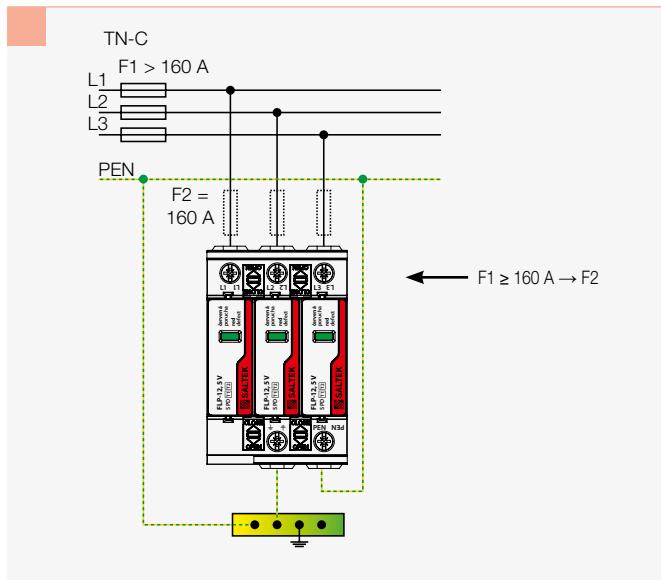


5. Principles for positioning and connecting of lightning and surge arresters

Surge protective devices and lightning current arresters cannot be positioned in the distribution board at random. It should be noted that protection should be located in the closest proximity to the entry feed cable of the distribution board to minimize the area of the induction loop, see the image below.

Another important condition for connecting the SPD is to minimize the impedance of connecting conductors. Stranded conductors or strip lines are preferentially used for connecting SPD Type 1. It is also important that the length of the connecting conductors is as small as possible – see IEC 60364-5-53 chapter 534 (HD 60364-5-534). The cross-section of the connecting conductors should be as large as possible – maximum up to the cross-section according to the type of connector. In SPD Type 1 (lightning arresters) the connecting conductors are an integral part of the main bonding – as determined by the IEC (EN) 60364-4-41 standard, while minimum cross-sections of the connecting conductors are specified in IEC (EN) 60364-5-54.

If SPDs are located in circuits where residual current devices are installed, the SPD should be positioned before the residual current device (not in the residual current device circuit), to prevent spontaneous overload tripping of the RCD affected by surge arresters or lightning current arresters.

Should an surge protection be located in the residual current devices circuit, RCD type S or G should be used. Even in this case it should be noted that the resistance of these residual current devices is not high (5 to 8 kA in wave 8/20 µs) which makes it impossible to use any SPD in the circuit of the residual current device. If you want to prevent a residual current device type S or G responding to surge protection by overload tripping, only a protection SPD Type 3 can be used in the circuit of the residual current device.

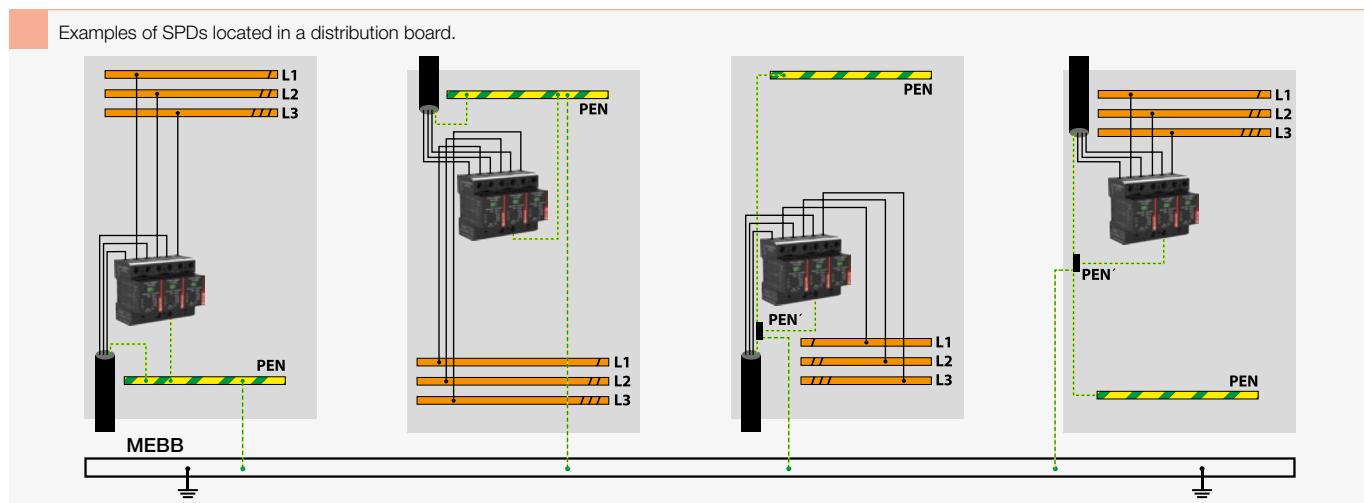


6. SPD dimensioning

Only the SPD Type 1 should be dimensioned. Dimensioning of the SPD Type 1 should be based on the calculation of the lightning protection level (LPL) for the lightning protection system (LPS).

The table from IEC (CLC/TS) 61643-12 below shows minimum values of the discharge lightning strike current to the pole considering the lightning protection (LPL) class of the building for the SPD Type 1.

If the LPL value is not known, the worse scenario is anticipated			Low voltage networks								
LPL	Maximum current corresponding to LPL	Number of conductors (n)	TT		TN-C	TN-S		IT without neutral conductor		IT with neutral conductor	
			Connection mode			Connection mode		Connection mode			
			CT1	CT2		CT1	CT2	CT1	CT2	L-PE	L-N N-PE
			L-PE N-PE	L-N	N-PE	L-PEN	L-PE N-PE	L-N	N-PE	L-PE	L-N N-PE
I or unknown	200 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	20,0	20,0	80,0	N/A	N/A
		4	25,0	25,0	100,0	25,0	N/A	N/A	N/A	25,0	100,0
		3	N/A	N/A	N/A	N/A	33,3	33,3	66,7	33,3	N/A
		2	50,0	50,0	100,0	50,0	N/A	N/A	N/A	50,0	100,0
II	150 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	15,0	15,0	60,0	N/A	N/A
		4	18,8	18,8	75,0	18,8	N/A	N/A	N/A	18,8	75,0
		3	N/A	N/A	N/A	N/A	25,0	25,0	50,0	25,0	N/A
		2	37,5	37,5	75,0	37,5	N/A	N/A	N/A	37,5	75,0
III or IV	100 kA	I_{imp} (kA)									
		5	N/A	N/A	N/A	N/A	10,0	10,0	40,0	N/A	N/A
		4	12,5	12,5	50,0	12,5	N/A	N/A	N/A	12,5	50,0
		3	N/A	N/A	N/A	N/A	16,7	16,7	33,3	16,7	N/A
		2	25,0	25,0	50,0	25,0	N/A	N/A	N/A	25,0	50,0

Note: CT1 – SPD connected in the x+0 mode; CT2 – SPD connected in the x+1 mode

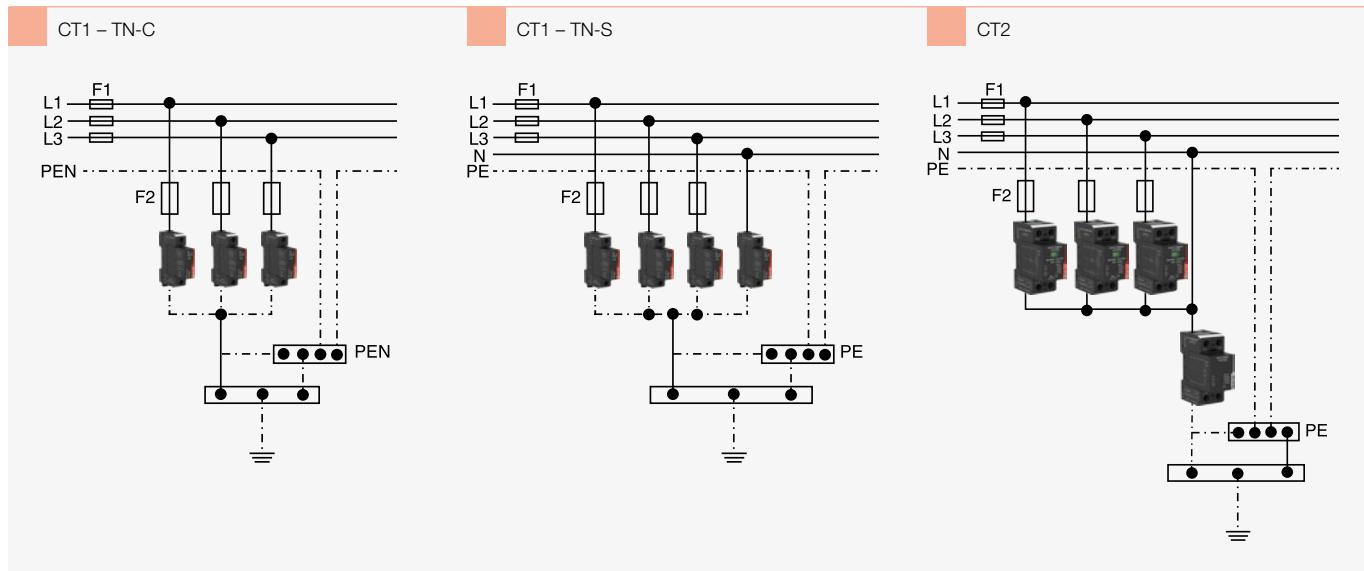


Behind the **FLP-B+C MAXI V...** in low-voltage power network 230/400 V AC is **not required to install any additional SPD** (e.g. SPD type 3) if the **length** of the electrical circuit from the

SPD to protected electrical equipment is **not exceed 10 meters** and the lengths of connecting cables of the SPD are not longer than 0,5 meter as it's mentioned in installation manual of SPD.

7. Reducing overvoltage in LPZ zones

The principle of reducing voltage using zones lies in progressive reduction of the overvoltage level to a safe value that will not damage the specific equipment or technology. To obtain a safe

overvoltage value, the whole structure is divided into individual zones and the SPD is installed at the boundary between the zones.

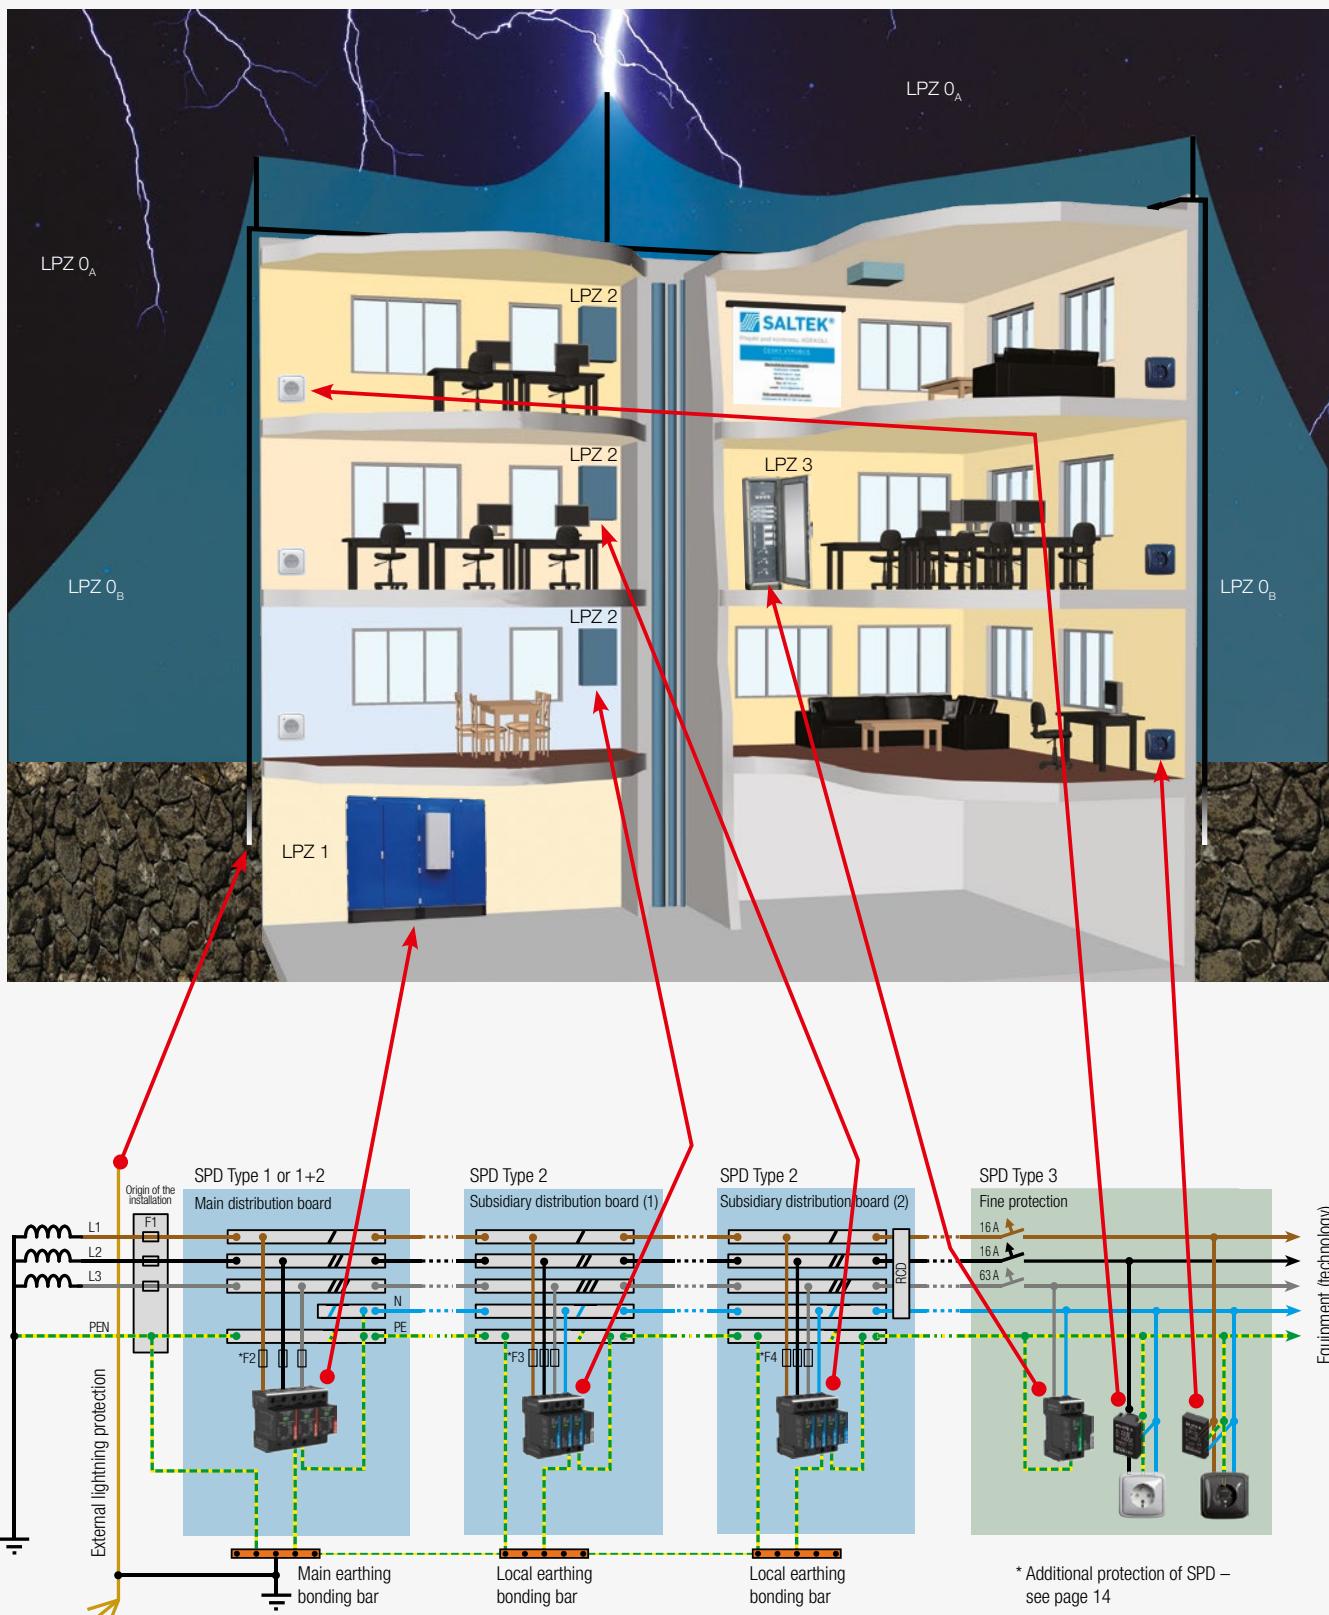


SALTEK® SPD applications in LV distribution systems

Type of structure	system	main distribution board (in the structure)	sub-distribution board (in the same structure)	end consumer
Family houses, administrative buildings, technological units, industrial structures	3-ph. TN-C	FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	distance > 5 m
		FLP-25-T1-V(S)/3	SLP-275 V/3 (S)	surge protection to DIN rail: DA-275 V1(S)+1 (up to 63 A) DA-275 V/3(S)+1 (up to 63 A) DA-275-DJ25-(S) (25 A)
		FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3 + SLP-275 V/3 (S) (also with terminals to the equipment)	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	surge protection to DIN rail with RFI filter: DA-275-DFx-(S) (x = 2, 6, 10, 16 A) DA-275 DF25 for 25 A DA-275-DFix (x = 6, 10, 16 A)
	3-ph. TN-S	FLP-B+C MAXI V(S)/4 FLP-25-T1-V(S)/4	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	RACK-PROTECTOR multiple sockets for 19" enclosures
		FLP-25-T1-V(S)/4	SLP-275 V/4 (S)	CZ-275-A, DA-275 CZS
		FLP-B+C MAXI V(S)/4 FLP-25-T1-V(S)/4 + SLP-275 V/4 (S) (also with terminals to the equipment)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	DA-275-A, DA-275-S
	3-ph. TN-C-S	FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	for additional assembly to sockets and appliances
		FLP-25-T1-V(S)/3	SLP-275 V/4 (S)	
		FLP-B+C MAXI V(S)/3 FLP-25-T1-V(S)/3 + SLP-275 V/3 (S) (also with terminals to the equipment)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	
Blocks of flats with 12 or more apartments (SPD located in the apart. distr. boards)	3-ph. TN-C		FLP-12,5 V/3 (S)	distance < 5 m
	3-ph. TN-S		FLP-12,5 V/4 (S)	place before the surge protection
	3-ph. TN-C-S	division in the apartment distr. board	FLP-12,5 V/3 (S)	RTO-xx
	1-ph. TN-C		FLP-B+C MAXI V(S)/1	(xx – rated current 16 or 63 A)
	1-ph. TN-S		FLP-12,5 V/2 (S)	
Demanding applications (structures – operations classified at the risk of explosion, chemical plants,..., structures of a very high importance)	3-ph. TN-C	3x FLP-SG50 V(S)/1 with terminals to the equipment 3x FLP-SG50 V(S)/1 + 1x SLP-275 V/3 (S)	SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3	number according to connection
	3-ph. TN-S	4x FLP-SG50 V(S)/1 with terminals to the equipment 4x FLP-SG50 V(S)/1 + 1x SLP-275 V/4 (S)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	1-phase TN-C 1x RTO-xx 1-phase TN-S 2x RTO-xx
	3-ph. TN-C-S	division in the main distribution board 3x FLP-SG50 V(S)/1 with terminals to the equipment 3x FLP-SG50 V(S)/1 + 1x SLP-275 V/4 (S)	SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4	3-phase TN-C 3x RTO-xx 3-phase TN-S 4x RTO-xx

SALTEK® SPD applications in LV distribution systems

Type of structure	system	main distribution board (in the structure)	sub-distribution board (in the same structure)	end consumer
Structures equipped with ESE (active down conductor)	3-ph. TN-C	<p>3x FLP-SG50 V(S)/1</p> <p>3x FLP-SG50 V(S)/1 also with terminals to the equipment 3x FLP-SG50 V(S)/1 + SLP-275 V/3 (S)</p>	<p>SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3</p> <p>SLP-275 V/3 (S) SLP-275 V/3 (S) distance > 50 m FLP-12,5 V/3 (S) distance > 100 m FLP-B+C MAXI V(S)/3</p> <p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	<p>distance > 5 m</p> <p>surge protection to DIN rail: DA-275 V/1(S)+1 (up to 63 A) DA-275 V/3(S)+1 (up to 63 A) DA-275-DJ25-(S) (25 A)</p> <p>surge protection to DIN rail with RFI filter: DA-275-DFx-(S) (x = 2, 6, 10, 16 A) DA-275 DF25 for 25 A DA-275-DFx (x = 6, 10, 16 A)</p> <p>RACK-PROTECTOR multiple sockets for 19" enclosures</p> <p>CZ-275-A, DA-275 CZS DA-275-A, DA-275-S for additional mounting to sockets and appliances</p>
	3-ph. TN-S	<p>4x FLP-SG50 V(S)/1</p> <p>4x FLP-SG50 V(S)/1 also with terminals to the equipment 4x FLP-SG50 V(S)/1 + SLP-275 V/4 (S)</p>	<p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	
	3-ph. TN-C-S	<p>3x FLP-SG50 V(S)/1</p> <p>3x FLP-SG50 V(S)/1 also with terminals to the equipment 3x FLP-SG50 V(S)/1 + SLP-275 V/3 (S)</p>	<p>SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p> <p>SLP-275 V/4 (S) SLP-275 V/4 (S) distance > 50 m FLP-12,5 V/4 (S) distance > 100 m FLP-B+C MAXI V(S)/4</p>	
Technological equipment with 1-phase connection	1-ph. TN-C	<p>FLP-SG50 V(S)/1</p> <p>with terminals to the equipment FLP-SG50 V(S)/1 + SLP-275 V/1 (S)</p>	<p>SLP-275 V/1 (S) distance > 50 m FLP-12,5 V/1 (S) distance > 100 m FLP-B+C MAXI V(S)/1</p>	<p>distance < 5 m SPD back-up RTO-xx (xx – rated current 16 or 63 A)</p>
	1-ph. TN-S	<p>2x FLP-SG50 V(S)/1</p> <p>with terminals to the equipment 2x FLP-SG50 V(S)/1 + 1x SLP-275 V/2 (S)</p>	<p>SLP-275 V/2 (S) distance > 50 m FLP-12,5 V/2 (S) distance > 100 m FLP-B+C MAXI V(S)/2</p>	<p>number according to connection</p>
	1-ph. TN-C-S	<p>division in the main distribution board FLP-SG50 V(S)/1</p> <p>with terminals to the equipment FLP-SG50 V(S)/1 + SLP-275 V/1 (S)</p>	<p>SLP-275 V/2 (S) distance > 50 m 1x FLP-12,5 V/2 (S) distance > 100 m FLP-B+C MAXI V(S)/2</p>	<p>1-phase TN-C 1x RTO-xx 1-phase TN-S 2x RTO-xx 3-phase TN-C 3x RTO-xx 3-phase TN-S 4x RTO-xx</p>

Notes

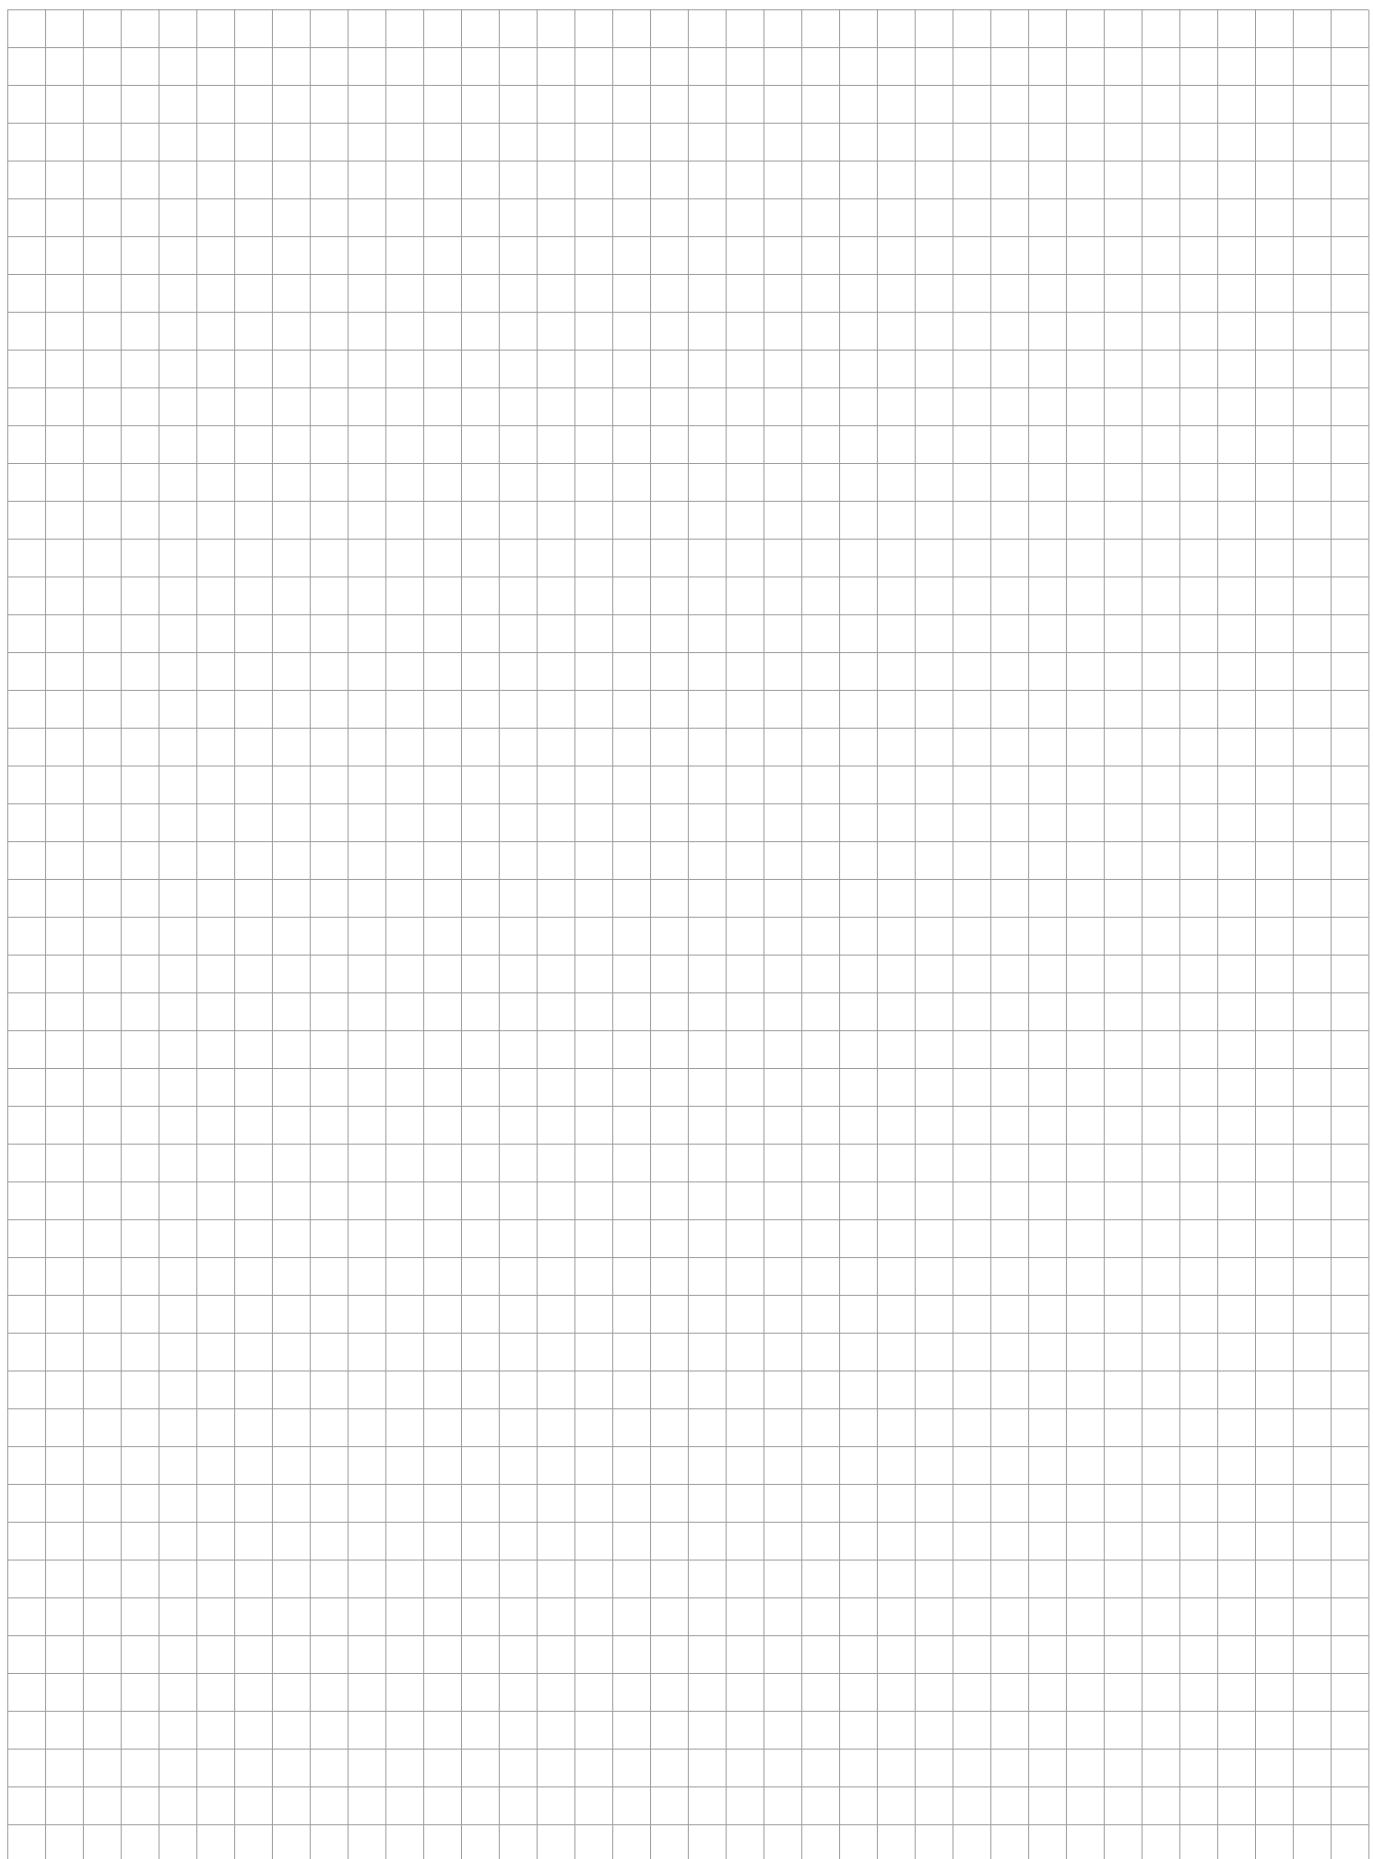

SPDs connected to LV power supply systems up to 1 000 V



Lightning Current Arresters SPDs Type 1 and Type 1 and 2

Surge protectors protect electrical equipment against damage from surges/overtvoltages that are higher than the equipment can withstand. Overvoltage is defined as a voltage that is twice the rated voltage. Dangerous are transient overvoltages that reach high amplitudes in a very short time. Overvoltages can penetrate systems through low-voltage power lines, through power transformers and equipment circuits, through control, measurement, data and telecommunication lines and sensor lines, especially if they are located outside the building or on pipelines, tracks, etc. In the event of an electronic system


being attacked by a surge pulse, the individual parts do not behave in isolation but interact with each other, even though they may not be galvanically connected. The surge always finds its way towards the grounded parts or to other lines representing a distant ground. The main principles of pulse surge protection are: external lightning protection - lightning conductor system; internal lightning and surge protection - surge protection device. Surge protection devices are installed at the interface of the individual LPZ zones, where they are also connected to the appropriate equipotential bonding system.

- Lightning current arresters, SPDs Type 1
- Combined lightning current and surge arresters, SPDs Type 1 and 2
- Installation mainly to main distribution boards, at the boundary of zones LPZ 0 and LPZ 1 or higher
- SPD with integrated backup fuse
- Line FLP-SG50 V
- Line FLP-25-T1-V
- Line FLP-25-T1-VSF
- Line FLP-B+C MAXI V
- Line FLP-B+C-MAXI-VSF
- Line FLP-EV12,5-VBH
- Line FLP-12,5 V
- Line FLP-A...N VS/NPE

FLP-SG50 V(S)/1

SPD type 1 – lightning current arresters, spark gap
pluggable module, visual fault signalling, module locking

- encapsulated high-performance spark gap
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in the hardest application in heavy, chemical and energy industry
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)

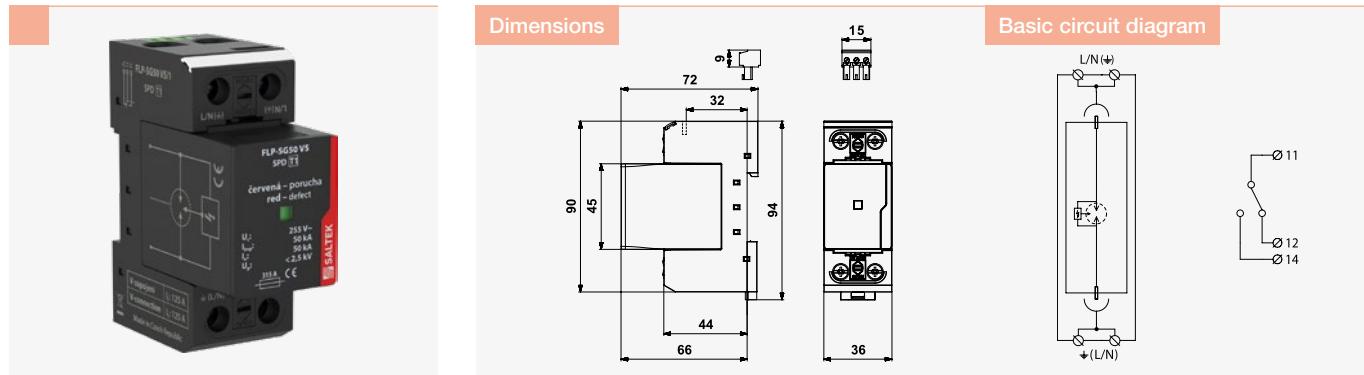

Parameter/Type	FLP-SG50 V/1	FLP-SG50 VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	255 V AC	255 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	50 kA	50 kA
Nominal discharge current (8/20 μ s) I_n	50 kA	50 kA
Voltage protection level U_p	2,5 kV	2,5 kV
Ability to independently switch off the following current I_f	50 kA	50 kA
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	315 A gL/gG	315 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	no	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A04054	A04053

Spare module	FLP-SG50 V/0	FLP-SG50 VS/0
Ordering number	A04227	A04148


FLP-25-T1-VSF/1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- one-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

- or indirect lightning strikes in wide range of applications – office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- zero leakage current
- with integrated backup fuse

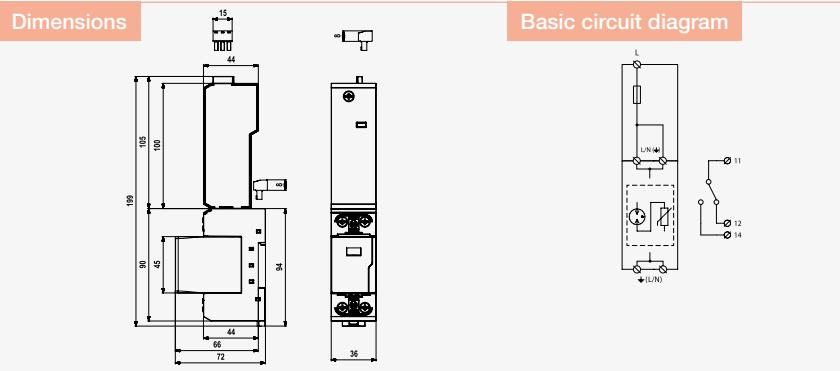

Parameter / Type	FLP-25-T1-VSF/1
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	260 V AC
Lightning impulse current (10/350 µs) I_{imp}	25 kA
Voltage protection level U_p	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA
Maximum overcurrent protection	-
Response time t_a	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A07112

ezü

Spare module	FLP-25-T1-V/0
Ordering number	A05453

FLP-25-T1-VSF/3

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- three-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct


or indirect lightning strikes in wide range of applications – office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors


- zero leakage current
- with integrated backup fuse



Dimensions

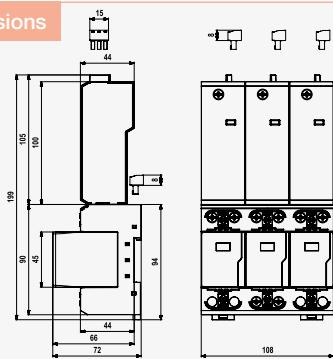

Basic circuit diagram



Parameter/Type	FLP-25-T1-VSF/3
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	260 V AC
Lightning impulse current (10/350 µs) I_{imp}	25 kA
Voltage protection level U_p	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA
Maximum overcurrent protection	-
Response time t_a	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A07113

ezü

Spare module	FLP-25-T1-V/0
Ordering number	A05453


FLP-25-T1-VSF/3+1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap,
- connected in the 3+1 mode installation at the boundary of zones LPZ 0

- and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- zero leakage current
- with integrated backup fuse

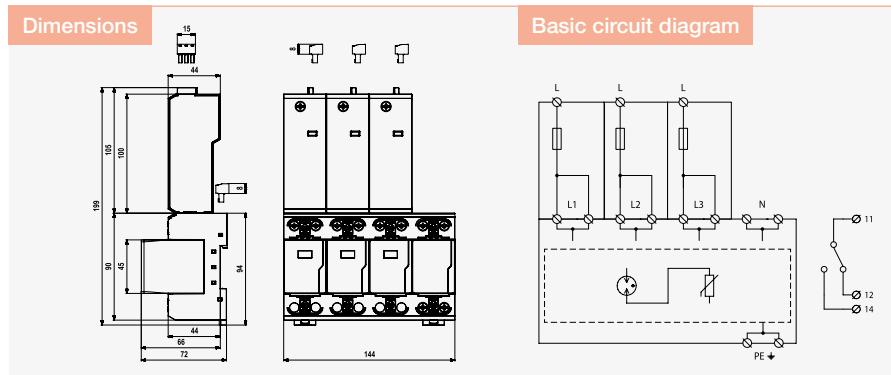

Parameter/Type	FLP-25-T1-VSF/3+1
Nominal voltage	230 V AC
Maximum operating voltage L-N	260 V AC
Maximum operating voltage N-PE	255 V AC
Lightning impulse current (10/350 µs) L-N	25 kA
Lightning impulse current (10/350 µs) N-PE	100 kA
Voltage protection level mode L-N	1,5 kV
Voltage protection level mode N-PE	1,5 kV
Voltage protection level mode L-PE	2,2 kV
Short-circuit current rating	50 kA
Maximum overcurrent protection	-
Ability to independently switch off the following current N-PE	0,1 kA
Response time L-N	100 ns
Response time N-PE	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A07114

ezü

Spare module	FLP-B+C MAXI V/0	FLP-A100N V/0
Ordering number	A03535	A03536

FLP-25-T1-VSF/4


SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- four-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

or indirect lightning strikes in wide range of applications – office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- zero leakage current
- with integrated backup fuse

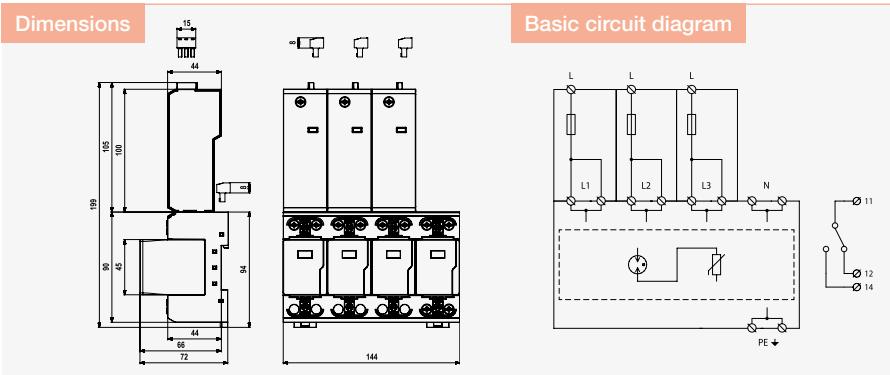

Parameter/Type	FLP-25-T1-VSF/4
Nominal voltage	230 V AC
Maximum operating voltage	260 V AC
Lightning impulse current (10/350 µs)	25 kA
Voltage protection level	1,5 kV
Short-circuit current rating	50 kA
Maximum overcurrent protection	-
Response time	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A07115

ezū

Spare module	FLP-25-T1-V/0
Ordering number	A05453


FLP-25-T1-V(S)/1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- one-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

- or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- no leakage current
- optional remote fault signalling (S)

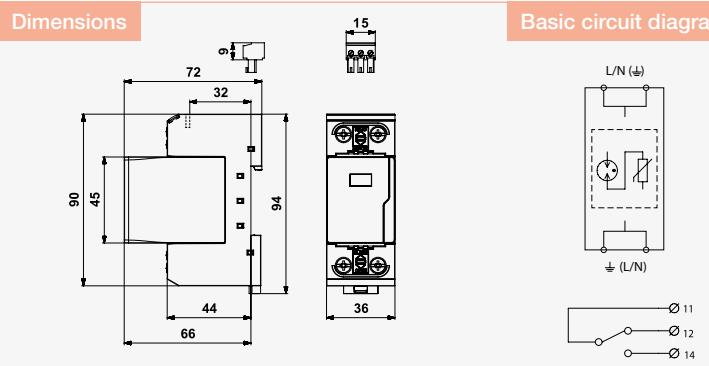

Parameter/Type	FLP-25-T1-V/1	FLP-25-T1-VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06263	A06264

ezú

ezú

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453


FLP-25-T1-V(S)/1+1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of one-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- no leakage current
- optional remote fault signalling (S)

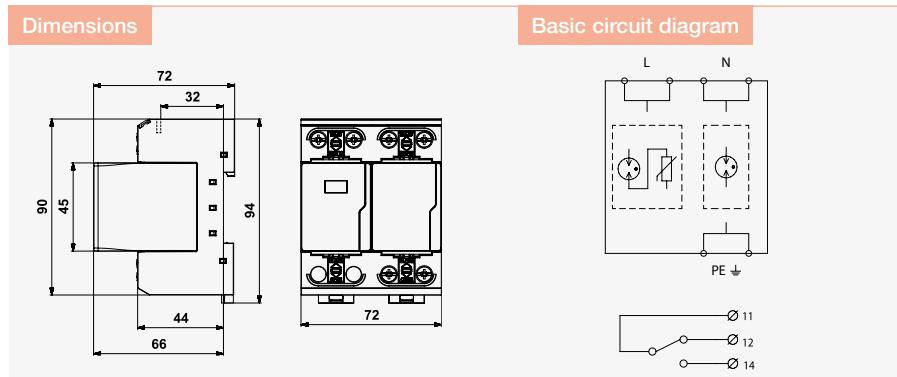

Parameter / Type	FLP-25-T1-V/1+1	FLP-25-T1-VS/1+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	50 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06257	A06258

ezú

ezú

Spare module	FLP-25-T1-V/0	FLP-A50N V/0	FLP-25-T1-V/0	FLP-A50N V/0
Ordering number	A05453	A03537	A05453	A03537


FLP-25-T1-V(S)/2

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- two-pole high performance lightning current arrester without follow current
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct

- or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors

- no leakage current
- optional remote fault signalling (S)

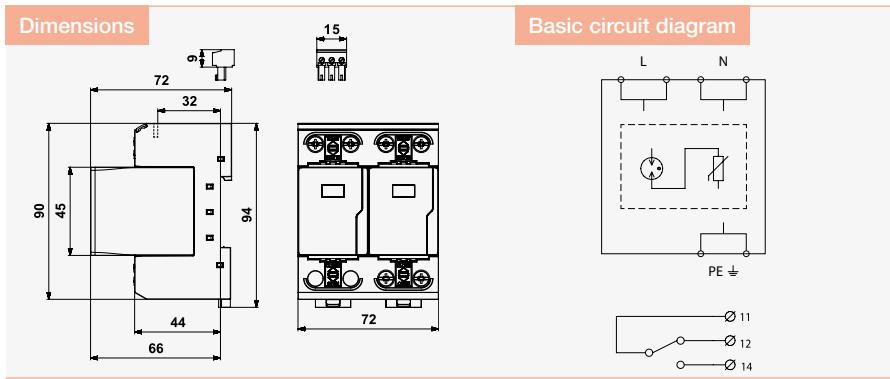

Parameter/Type	FLP-25-T1-V/2	FLP-25-T1-VS/2
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	–	potential-free change-over contact
Remote indication contacts	–	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	–	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A06259	A06260

ezú


ezú

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453

FLP-25-T1-V(S)/3

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- three-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no follow current, no leakage current

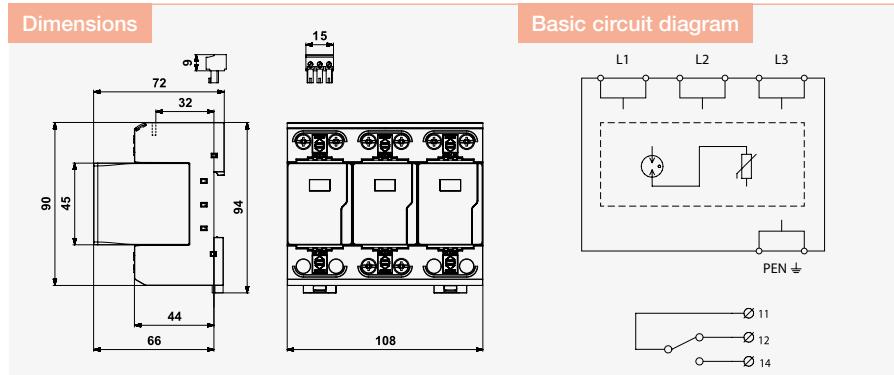

Parameter/Type	FLP-25-T1-V/3	FLP-25-T1-VS/3
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 µs) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	no	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05300	A05301

ezú


ezú

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453

FLP-25-T1-V(S)/4

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- four-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings
- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no follow current, no leakage current

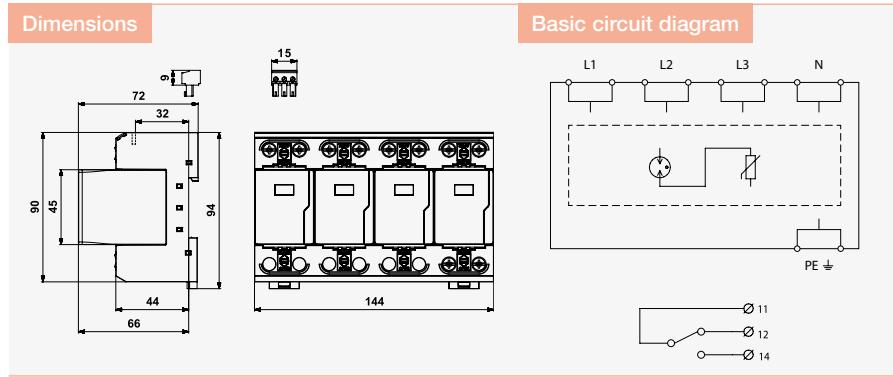

Parameter/Type	FLP-25-T1-V/4	FLP-25-T1-VS/4
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05302	A05303

ezú

ezú

Spare module	FLP-25-T1-V/0	FLP-25-T1-V/0
Ordering number	A05453	A05453


FLP-25-T1-V(S)/3+1

SPD type 1 – lightning current arresters, combination type T1 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office and industrial buildings

- coordination with SPD Type 2 (SLP-275 V) even without surge separating inductors
- optional remote fault signalling (S)
- no leakage current

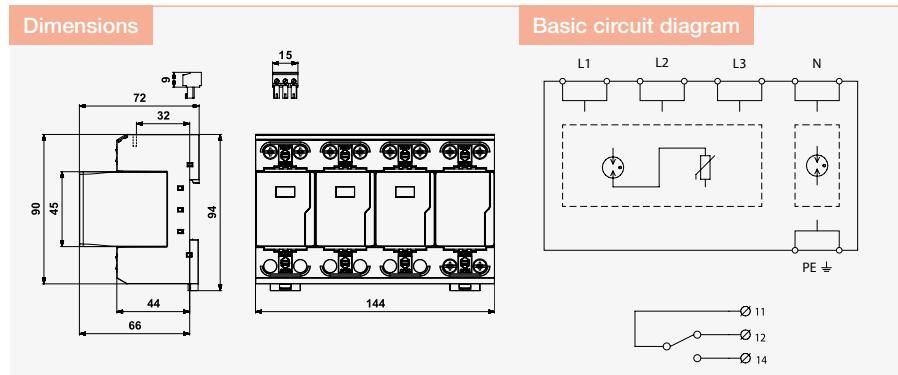

Parameter/Type	FLP-25-T1-V/3+1	FLP-25-T1-VS/3+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Ability to independently switch off the following current N-PE	I_{fi}	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1	EN 61643-11:2012, IEC 61643-11:2011 / T1
Ordering number	A05304	A05305

ezū


ezū

Spare module	FLP-25-T1-V/0	FLP-A100N V/0	FLP-25-T1-V/0	FLP-A100N V/0
Ordering number	A05453	A03536	A05453	A03536

FLP-A...N VS/NPE

SPD type 1 – lightning current arresters, spark gap for N-PE
N-PE module, pluggable module

- for connection SPD Type 1 in 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes

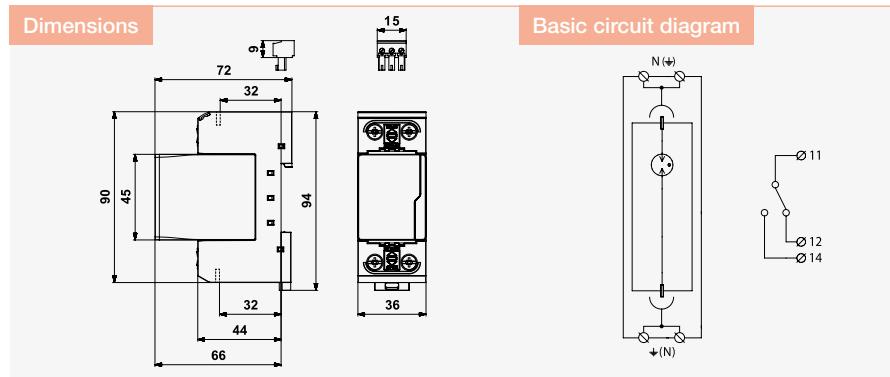

Parameter/Type	FLP-A50N VS/NPE	FLP-A100N VS/NPE
Maximum operating voltage U_c	255 V AC	255 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	50 kA	100 kA
Nominal discharge current (8/20 μ s) I_n	50 kA	100 kA
Maximum discharge current (8/20 μ s) I_{max}	100 kA	100 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Ability to independently switch off the following current I_f	0,1 kA	0,1 kA
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	remote signalling of N-PE module shows the presence of the replaceable module	remote signalling of N-PE module shows the presence of the replaceable module
Remote indication	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03573	A03574

ezü


ezü

Spare module	FLP-A50N V/O	FLP-A100N V/O
Ordering number	A03537	A03536

FLP-B+C-MAXI-VSF/1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office or industrial buildings
- no follow current, zero leakage current
- with integrated backup fuse

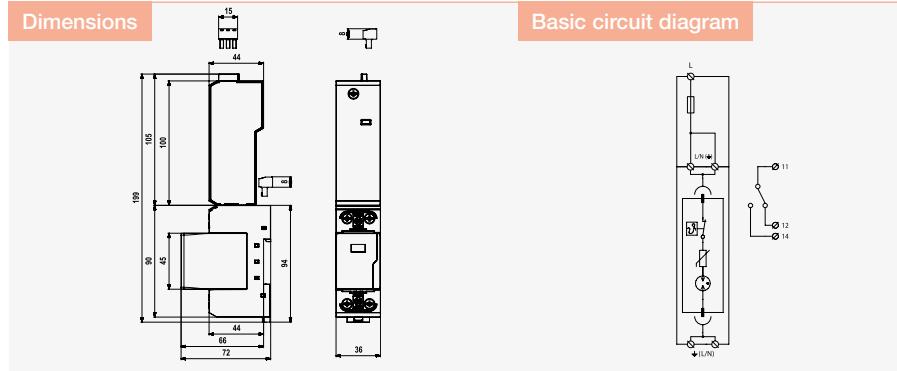

Parameter / Type	FLP-B+C-MAXI-VSF/1
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	260 V AC
Lightning impulse current (10/350 μ s) I_{imp}	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA
Voltage protection level U_p	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV
Short-circuit current rating I_{SCCR}	50 kA
Maximum overcurrent protection	-
Response time t_a	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07116


ezū

Spare module	FLP-B+C MAXI V/0
Ordering number	A03535

FLP-B+C-MAXI-VSF/3

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- three-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office or industrial buildings
- no follow current, zero leakage current
- with integrated backup fuse

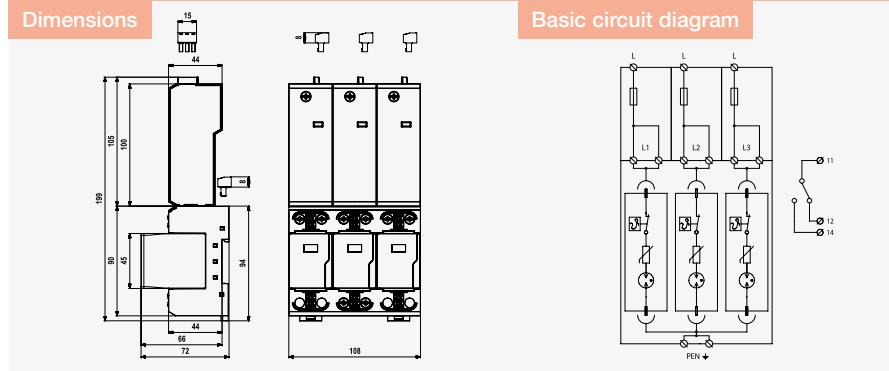

Parameter / Type	FLP-B+C-MAXI-VSF/3
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	260 V AC
Lightning impulse current (10/350 μ s) I_{imp}	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA
Voltage protection level U_p	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV
Short-circuit current rating I_{SCCR}	50 kA
Maximum overcurrent protection	-
Response time t_a	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07117


ezù

Spare module	FLP-B+C MAXI V/0
Ordering number	A03535

FLP-B+C-MAXI-VSF/3+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office or industrial buildings
- zero leakage current
- with integrated backup fuse

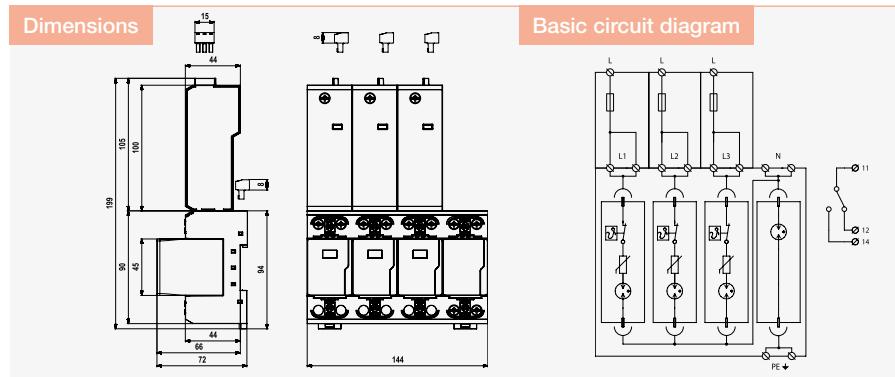

Parameter / Type	FLP-B+C-MAXI-VSF/3+1
Nominal voltage	U _n 230 V AC
Maximum operating voltage L-N	U _c 260 V AC
Maximum operating voltage N-PE	U _c 255 V AC
Lightning impulse current (10/350 µs) L-N	I _{imp} 25 kA
Lightning impulse current (10/350 µs) N-PE	I _{imp} 100 kA
Nominal discharge current (8/20 µs) L-N	I _n 30 kA
Nominal discharge current (8/20 µs) N-PE	I _n 100 kA
Maximum discharge current (8/20 µs) L-N	I _{max} 60 kA
Maximum discharge current (8/20 µs) N-PE	I _{max} 100 kA
Voltage protection level L-N	U _p 1,5 kV
Voltage protection level N-PE	U _p 1,5 kV
Voltage protection level L-PE	U _p 2,2 kV
Class test T3: Test voltage	U _{OC} 20 kV
Short-circuit current rating	I _{SCCR} 50 kA
Maximum overcurrent protection	-
Ability to independently switch off the following current N-PE	I _{fi} 0,1 kA
Response time L-N	t _a 100 ns
Response time N-PE	t _a 100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07118


ezū

Spare module	FLP-B+C MAXI V/0	FLP-A100N V/0
Ordering number	A03535	A03536

FLP-B+C-MAXI-VSF/4

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signaling, module locking, remote fault signaling

- four-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – office or industrial buildings
- no follow current, zero leakage current
- with integrated backup fuse

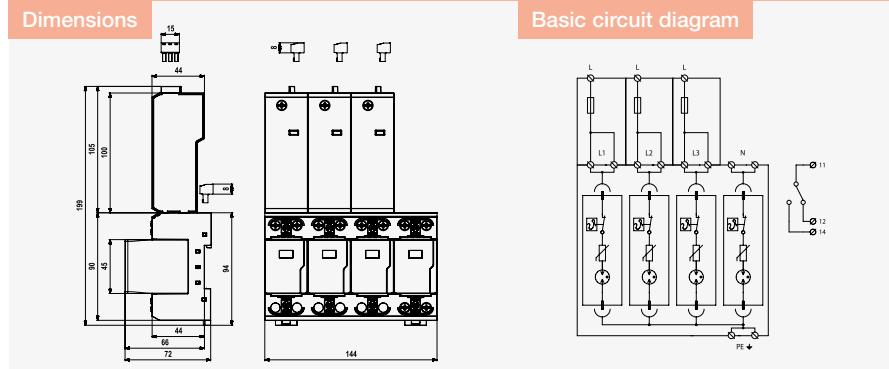

Parameter / Type	FLP-B+C-MAXI-VSF/4
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	260 V AC
Lightning impulse current (10/350 μ s) I_{imp}	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA
Voltage protection level U_p	1,5 kV
Class test T3: Test voltage U_{OC}	20 kV
Short-circuit current rating I_{SCCR}	50 kA
Maximum overcurrent protection	-
Response time t_a	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07119


ezù

Spare module	FLP-B+C MAXI V/0
Ordering number	A03535

FLP-B+C MAXI V(S)/1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

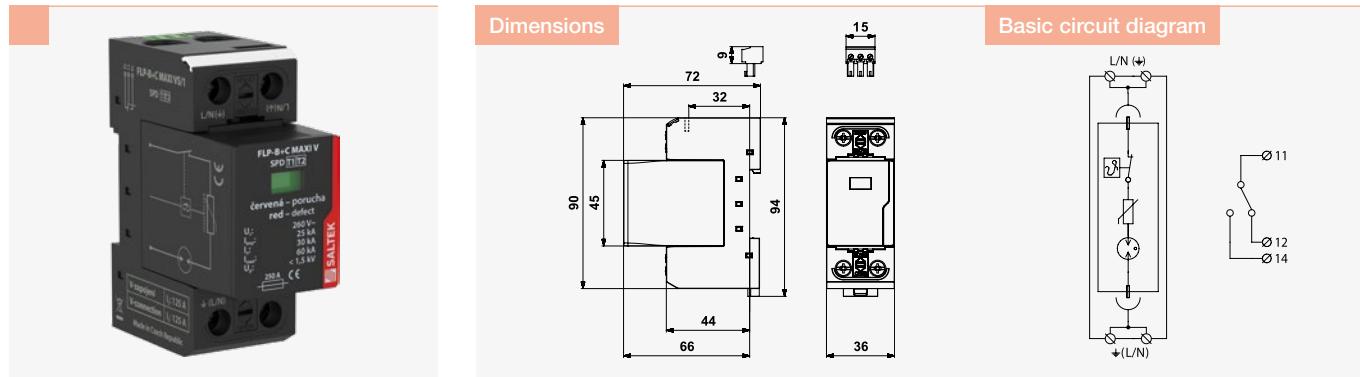

Parameter/Type	FLP-B+C MAXI V/1	FLP-B+C MAXI VS/1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV	20 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05091	A03533



Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535


FLP-B+C MAXI V(S)/1+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to

- main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications with single-phase networks, resp. to sub-distribution boards in large buildings

- optional remote fault signalling (S)
- no leakage current

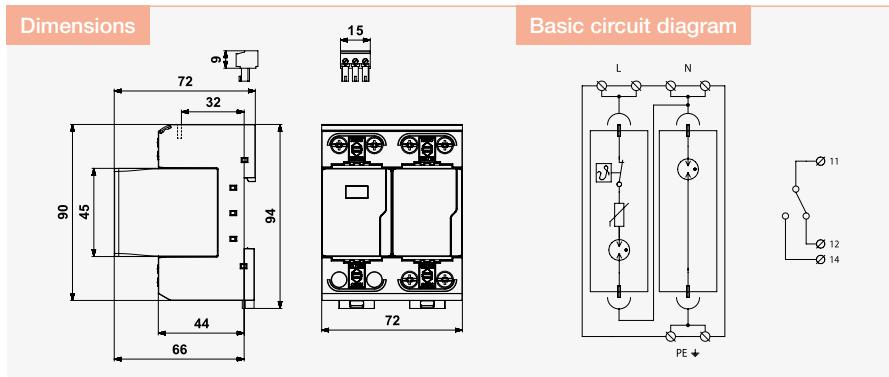

Parameter/Type	FLP-B+C MAXI V/1+1	FLP-B+C MAXI VS/1+1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage L-N U_c	260 V AC	260 V AC
Maximum operating voltage N-PE U_c	255 V AC	255 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 µs) L-N I_{imp}	25 kA	25 kA
Lightning impulse current (10/350 µs) N-PE I_{imp}	50 kA	50 kA
Nominal discharge current (8/20 µs) L-N I_n	30 kA	30 kA
Nominal discharge current (8/20 µs) N-PE I_n	50 kA	50 kA
Maximum discharge current (8/20 µs) L-N I_{max}	60 kA	60 kA
Maximum discharge current (8/20 µs) N-PE I_{max}	100 kA	100 kA
Voltage protection level mode L-N U_p	1,5 kV	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	2,2 kV	2,2 kV
Class test T3: Test voltage U_{oc}	20 kV	20 kV
Ability to independently switch off the following current N-PE I_f	0,1 kA	0,1 kA
Short-circuit current rating I_{SCOR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time L-N t_a	100 ns	100 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication L-N	red indication field	red indication field
Fault indication N-PE	no	no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05095	A03783

ezü VDE


ezü VDE

Spare module	FLP-B+C MAXI V/0	FLP-A50N V/0	FLP-B+C MAXI V/0	FLP-A50N V/0
Ordering number	A03535	A03537	A03535	A03537

FLP-B+C MAXI V(S)/2

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

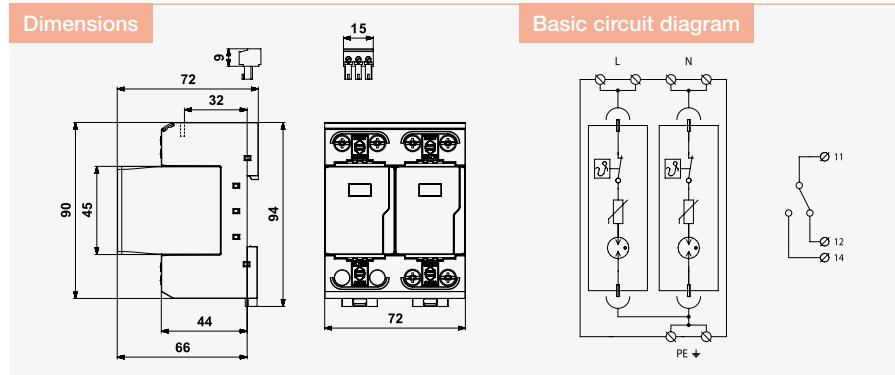

Parameter/Type	FLP-B+C MAXI V/2	FLP-B+C MAXI VS/2
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	260 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs)	I_{imp}	25 kA
Nominal discharge current (8/20 µs)	I_n	30 kA
Maximum discharge current (8/20 µs)	I_{max}	60 kA
Voltage protection level	U_p	1,5 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication		red indication field
Remote indication		- potential-free change-over contact
Remote indication contacts		250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors		1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05092	A03784

ezú VDE


ezú VDE

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535

FLP-B+C MAXI V(S)/3

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- three-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

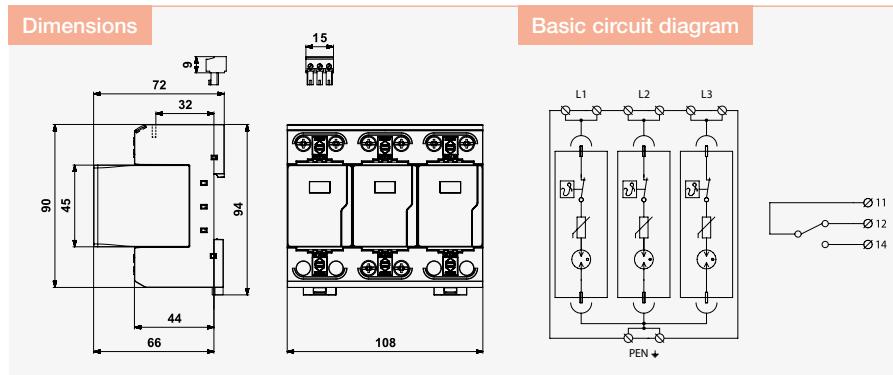

Parameter/Type	FLP-B+C MAXI V/3	FLP-B+C MAXI VS/3
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	260 V AC	260 V AC
Nominal load current for "V" connection I_L	125 A	125 A
Lightning impulse current (10/350 μ s) I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level U_p	1,5 kV	1,5 kV
Class test T3: Test voltage U_{oc}	20 kV	20 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	250 A gL/gG	250 A gL/gG
Maximum overcurrent protection for "V" connection	125 A gL/gG	125 A gL/gG
Response time t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	2,5 mm ² / 50 mm ²	2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ² / 35 mm ²	2,5 mm ² / 35 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05093	A03570

ezü **VDE**


ezü **VDE**

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535

FLP-B+C MAXI V(S)/4

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- four-pole high performance lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no follow current, no leakage current

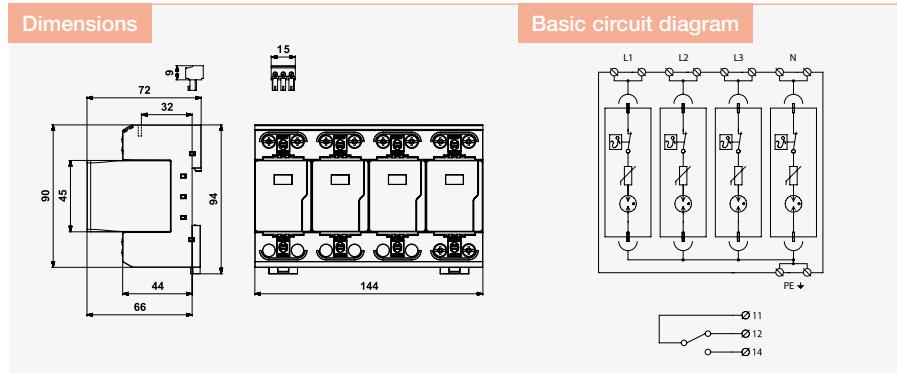

Parameter/Type	FLP-B+C MAXI V/4	FLP-B+C MAXI VS/4
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	260 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 μ s)	I_{imp}	25 kA
Nominal discharge current (8/20 μ s)	I_n	30 kA
Maximum discharge current (8/20 μ s)	I_{max}	60 kA
Voltage protection level	U_p	1,5 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication		red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05094	A03571

ezü **VDE**

ezü **VDE**

Spare module	FLP-B+C MAXI V/0	FLP-B+C MAXI V/0
Ordering number	A03535	A03535


FLP-B+C MAXI V(S)/3+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (25 kA)
pluggable module, visual fault signalling, module locking

- combination of three-pole high performance lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones

- LPZ 0 and LPZ 1 or higher, mainly to main distribution boards
- for protection against impact of direct or indirect lightning strikes in wide range of applications – houses, office

- or industrial buildings, resp. to sub-distribution boards in large buildings
- optional remote fault signalling (S)
- no leakage current

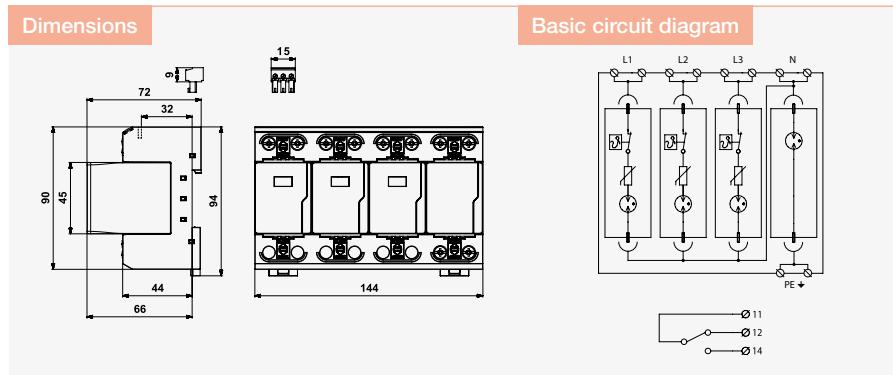

Parameter/Type	FLP-B+C MAXI V/3+1	FLP-B+C MAXI VS/3+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	260 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal load current for "V" connection	I_L	125 A
Lightning impulse current (10/350 µs) L-N	I_{imp}	25 kA
Lightning impulse current (10/350 µs) N-PE	I_{imp}	100 kA
Nominal discharge current (8/20 µs) L-N	I_n	30 kA
Nominal discharge current (8/20 µs) N-PE	I_n	100 kA
Maximum discharge current (8/20 µs) L-N	I_{max}	60 kA
Maximum discharge current (8/20 µs) N-PE	I_{max}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2,2 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCOR}	50 kA
Maximum overcurrent protection		250 A gL/gG
Maximum overcurrent protection for "V" connection		125 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		2,5 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)		2,5 mm ² / 35 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A05096	A03572

ezü **VDE**


ezü **VDE**

Spare module	FLP-B+C MAXI V/0	FLP-A100N V/0	FLP-B+C MAXI V/0	FLP-A100N V/0
Ordering number	A03535	A03536	A03535	A03536

FLP-EV12,5-VBH/.S+1

SPD type 1 and type 2 – lightning current and surge arresters, combination type T1+T2 (12,5 kA)
pluggable module, visual fault signalling, remote fault signalling

- combination of one-pole lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 or 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher
- for protection against impact of direct or indirect lightning strikes – eg. charging stations for electrical vehicles

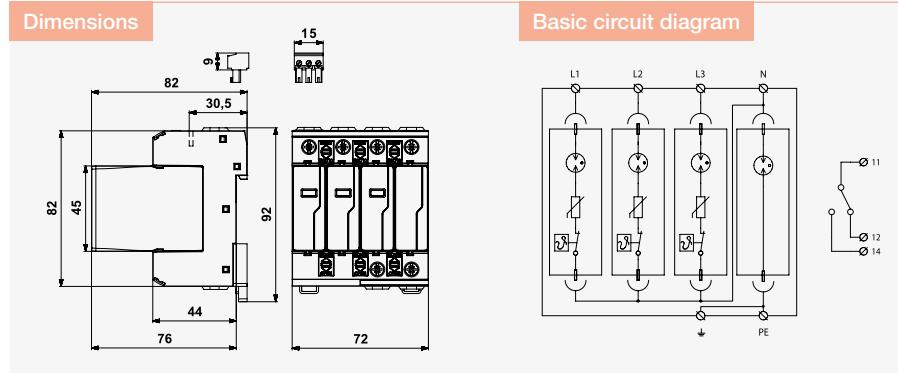

Parameter/Type	FLP-EV12,5-VBH/1S+1	FLP-EV12,5-VBH/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Lightning impulse current (10/350 μ s) L-N	I_{imp}	12,5 kA
Lightning impulse current (10/350 μ s) N-PE	I_{imp}	25 kA
Nominal discharge current (8/20 μ s) L-N	I_n	30 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	30 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	60 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	100 kA
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	2 kV
Class test T3: Test voltage	U_{oc}	20 kV
Short-circuit current rating	I_{SCCR}	50 kA
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	100 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A07043	A07049

ezù


ezù

Spare module	FLP-12,5-VBH/0	FLP-NPE-25-VH/0	FLP-12,5-VBH/0
Ordering number	A07050	A07066	A07050

FLP-12,5 V/1 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

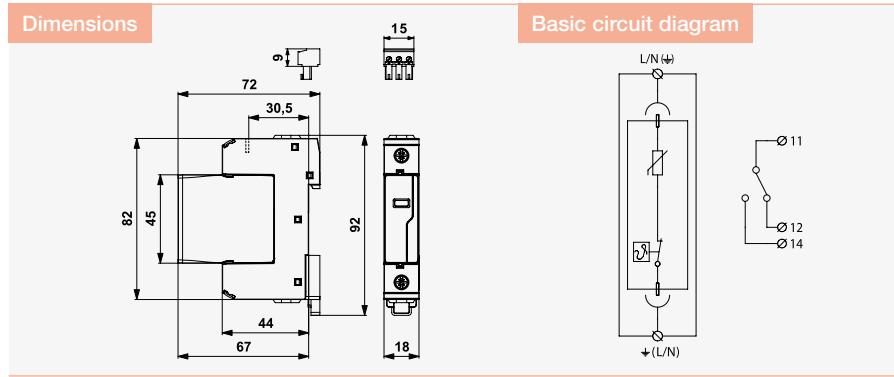

Parameter/Type	FLP-12,5 V/1	FLP-12,5 V/1 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03421	A03422

ezü


ezü

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5-075-VH/1(S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

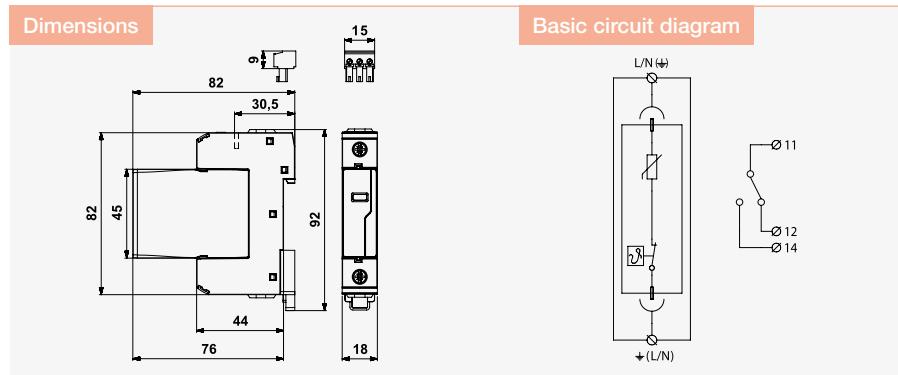

Parameter/Type	FLP-12,5-075-VH/1	FLP-12,5-075-VH/1S
Nominal voltage U_n	48 ÷ 60 V AC/DC	48 ÷ 60 V AC/DC
Maximum operating voltage U_c	75 V AC / DC	75 V AC / DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,28 kV	0,28 kV
Voltage protection level U_p	0,45 kV	0,45 kV
Short-circuit current rating I_{SCCR}	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A04168	A04169

ezü


ezü

Spare module	FLP-12,5-075-VH/0	FLP-12,5-075-VH/0
Ordering number	A04571	A04571

FLP-12,5 V/1(S)+1

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- combination of varistor lightning current arrester and encapsulated efficiency spark gap, connected in the 1+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

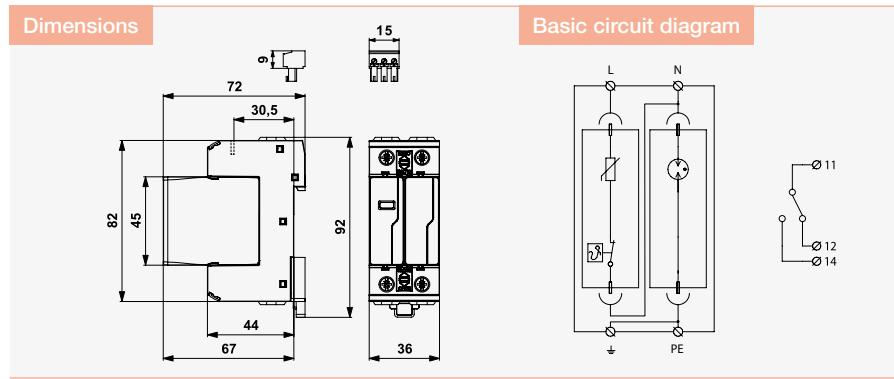

Parameter/Type	FLP-12,5 V/1+1	FLP-12,5 V/1S+1
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage L-N U_c	275 V AC	275 V AC
Maximum operating voltage N-PE U_c	255 V AC	255 V AC
Lightning impulse current (10/350 µs) L-N I_{imp}	12,5 kA	12,5 kA
Lightning impulse current (10/350 µs) N-PE I_{imp}	25 kA	25 kA
Nominal discharge current (8/20 µs) L-N I_n	30 kA	30 kA
Nominal discharge current (8/20 µs) N-PE I_n	30 kA	30 kA
Maximum discharge current (8/20 µs) L-N I_{max}	60 kA	60 kA
Maximum discharge current (8/20 µs) N-PE I_{max}	60 kA	60 kA
Voltage protection level at 5 kA L-N U_p	0,9 kV	0,9 kV
Voltage protection level mode L-N U_p	1,5 kV	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Ability to independently switch off the following current N-PE I_f	0,1 kA	0,1 kA
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication L-N	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03423	A03424

ezü


ezü

Spare module	FLP-12,5 V/0	FLP-NPE 25 V/0	FLP-12,5 V/0	FLP-NPE 25 V/0
Ordering number	A03431	A03432	A03431	A03432

FLP-12,5 V/2 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- two-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

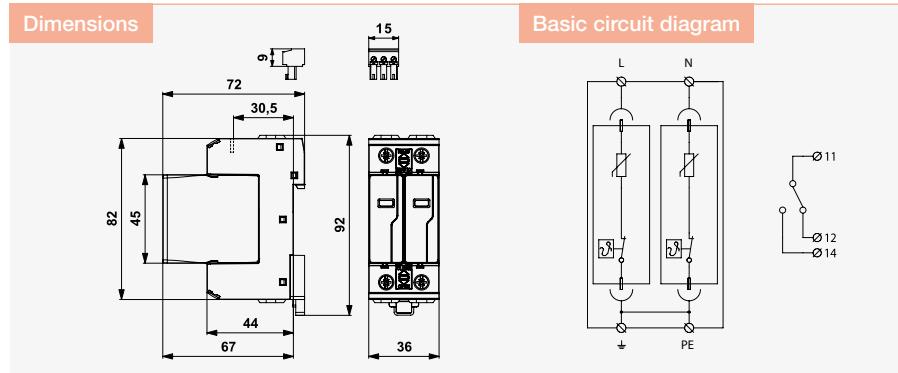

Parameter/Type	FLP-12,5 V/2	FLP-12,5 V/2 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03809	A05182

ezü


ezü

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5-075-VH/2 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling

- varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

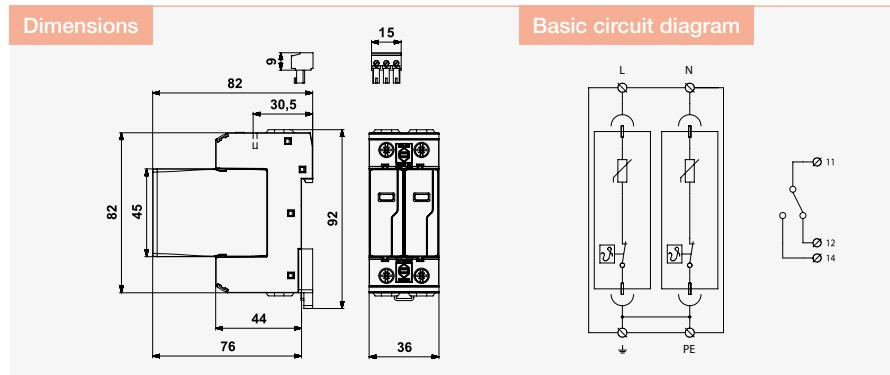


Parameter/Type	FLP-12,5-075-VH/2	FLP-12,5-075-VH/2S
Nominal voltage U_n	48 ÷ 60 V AC/DC	48 ÷ 60 V AC/DC
Maximum operating voltage U_c	75 V AC / DC	75 V AC / DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,28 kV	0,28 kV
Voltage protection level U_p	0,45 kV	0,45 kV
Short-circuit current rating I_{SCCR}	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A04170	A04171

Spare module	FLP-12,5-075-VH/0	FLP-12,5-075-VH/0
Ordering number	A04571	A04571

FLP-12,5 V/3 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- three-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

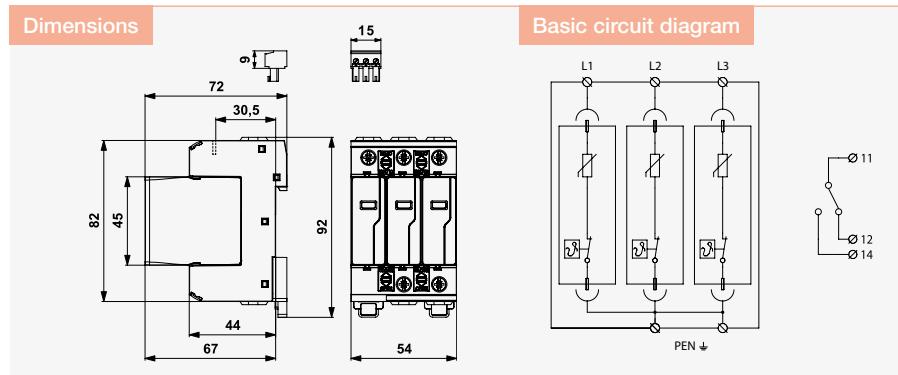

Parameter/Type	FLP-12,5 V/3	FLP-12,5 V/3 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03425	A03426

ezü


ezü

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5 V/4 (S)

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- four-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

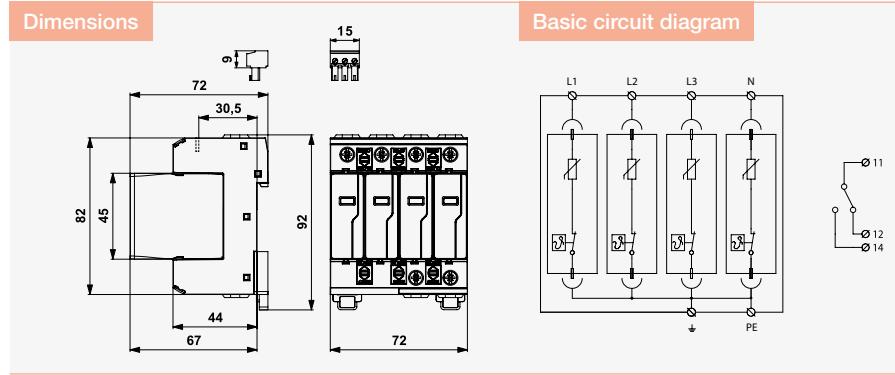

Parameter/Type	FLP-12,5 V/4	FLP-12,5 V/4 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Lightning impulse current (10/350 μ s) I_{imp}	12,5 kA	12,5 kA
Nominal discharge current (8/20 μ s) I_n	30 kA	30 kA
Maximum discharge current (8/20 μ s) I_{max}	60 kA	60 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03429	A03430

ezü


ezü

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-12,5 V/3(S)+1

SPD type 1 and type 2 – lightning current and surge arresters, MOV T1, T2
pluggable module, visual fault signalling, module locking

- combination of varistor lightning current arrester and encapsulated efficiency spark gap, connected in the 3+1 mode
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

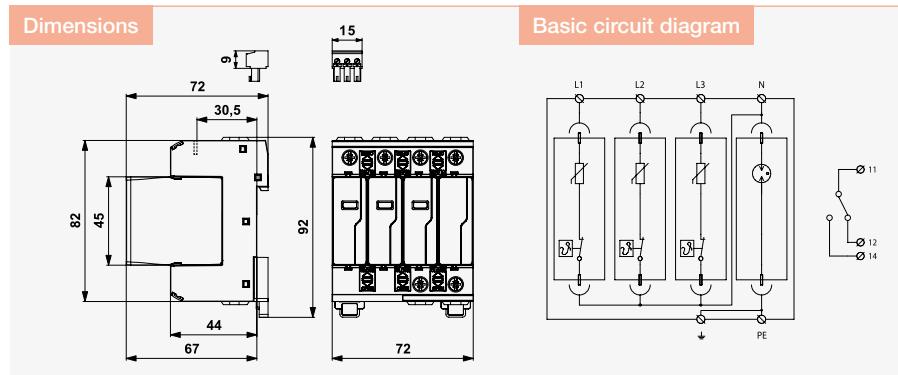

Parameter/Type	FLP-12,5 V/3+1	FLP-12,5 V/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Lightning impulse current (10/350 μ s) L-N	I_{imp}	12,5 kA
Lightning impulse current (10/350 μ s) N-PE	I_{imp}	50 kA
Nominal discharge current (8/20 μ s) L-N	I_n	30 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	50 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	60 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	100 kA
Voltage protection level at 5 kA L-N	U_p	0,9 kV
Voltage protection level mode L-N	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2	EN 61643-11:2012, IEC 61643-11:2011 / T1,T2
Ordering number	A03427	A03428


ezü

ezü

Spare module	FLP-12,5 V/0	FLP-12,5 V/0
Ordering number	A03431	A03431

FLP-...V/0

Replacement modules of SPD type 1
and type 1 and 2

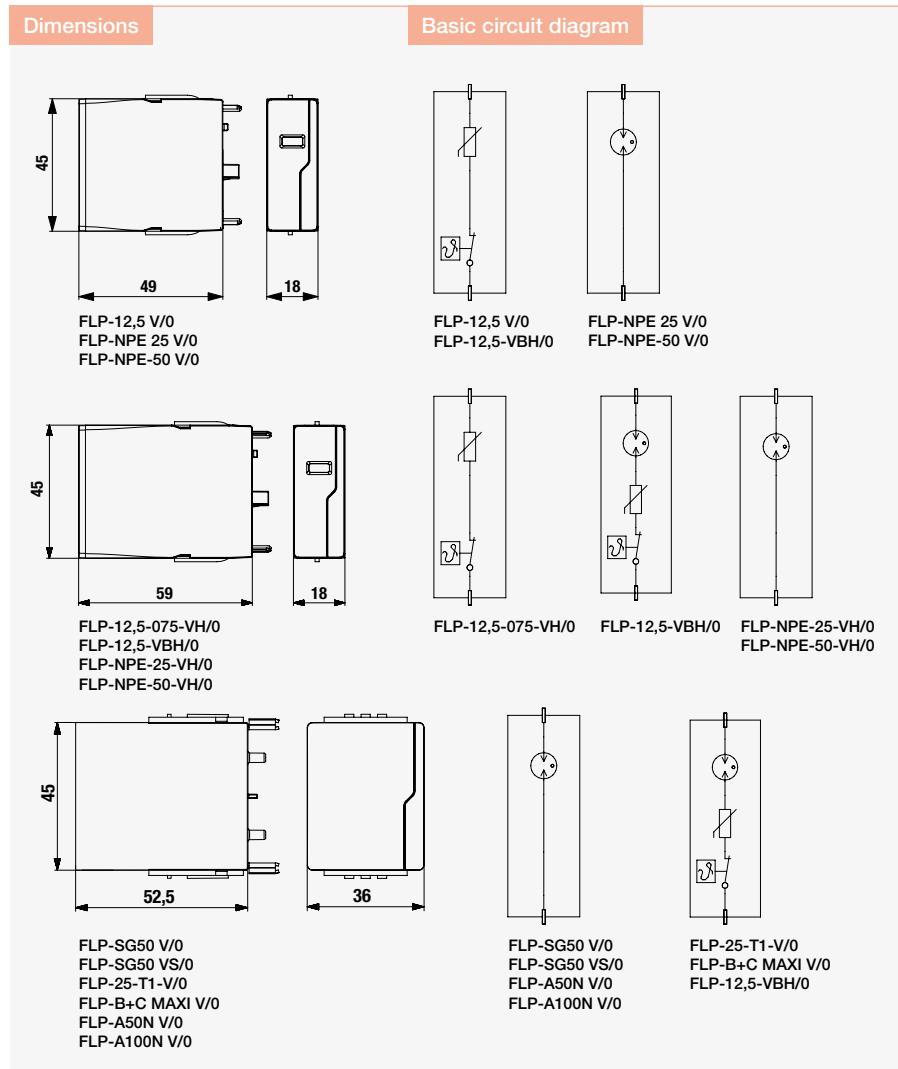


Type	Ordering number
FLP-SG50 V/0	A04227
FLP-SG50 VS/0	A04148
FLP-25-T1-V/0	A05453
FLP-A50N V/0	A03537
FLP-A100N V/0	A03536
FLP-B+C MAXI V/0	A03535
FLP-12,5 V/0	A03431
FLP-NPE 25 V/0	A03432
FLP-NPE-50 V/0	A07451
FLP-12,5-075-VH/0	A04571
FLP-12,5-VBH/0	A07050
FLP-NPE-25-VH/0	A07066
FLP-NPE-50-VH/0	A07416



ezú

Notes

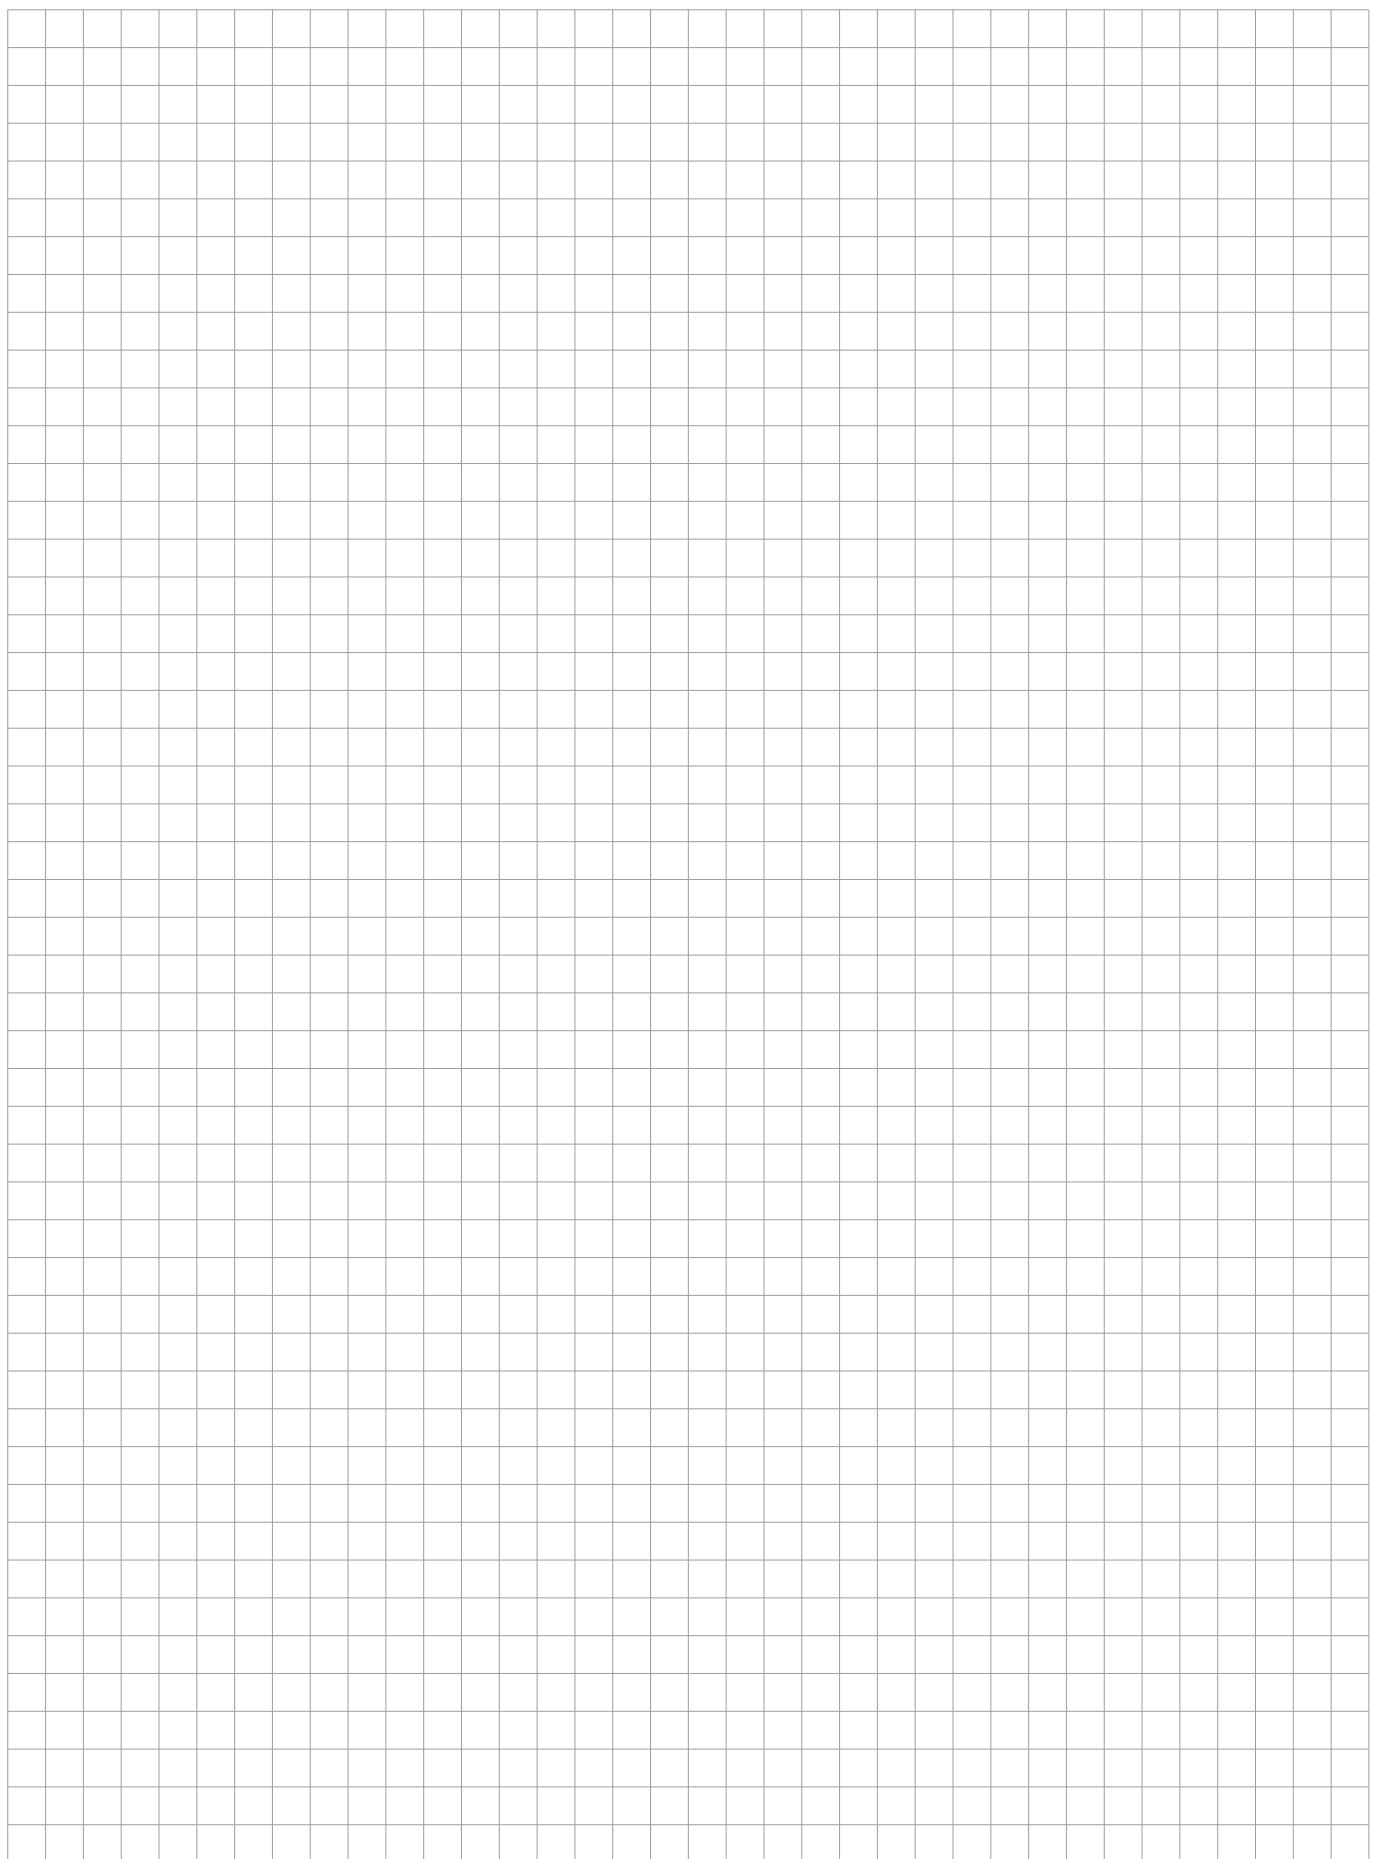A large grid of squares, approximately 20 columns by 20 rows, intended for handwritten notes.

SPDs connected to LV power supply systems up to 1 000 V



Surge Arresters SPDs Type 2

Type 2 SPDs or surge arresters are surge protection devices designed as a second level of protection for equipment against the effects of surges caused by indirect or remote lightning strikes, or switching surges. They are intended for the discharge of lower energies and

are located at the interface of LPZ1 and LPZ2 zones. Protection is provided once, i.e. after disconnection the arrester must be replaced. In the case of a modular design, only the disconnected module is to be replaced.


- Surge Arresters, SPDs Type 2
- Suitable for TN, TT, IT networks
- Installation mainly to sub-distribution boards
- Line SLP-... V
- Line SLP-... VB

SLP-... V/1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling

- varistor surge arrester
- installation to LV installations, especially to sub-distribution boards

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

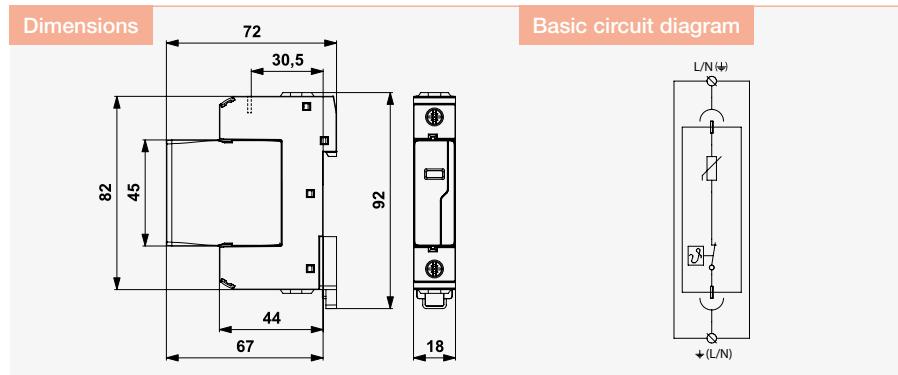

Parameter/Type	SLP-075 V/1	SLP-150 V/1	SLP-275 V/1	SLP-385 V/1	SLP-440 V/1	SLP-600 V/1
Nominal voltage U_n	60 V AC	120 V AC	230 V AC	-	400 V AC	230 ÷ 690 V AC
Maximum operating voltage of varistor	-	-	-	-	-	880 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	150 V AC / 200 V DC	275 V AC / 350 V DC	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,45 kV	0,9 kV	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	0,4 kV	0,7 kV	1,35 kV	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2					
Ordering number	A01815	A05185	A01617	A01955	A01817	A03301

ezù

ezù

ezù

VDE

ezù

ezù

Spare module	SLP-075 V/0	SLP-150 V/0	SLP-275 V/0	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01811	A05193	A02368	A01950	A01813	A03303

SLP-... V/1 S


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, remote fault signalling

- varistor surge arrester
- installation to LV installations, especially to sub-distribution boards

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- remote fault signalling (S)

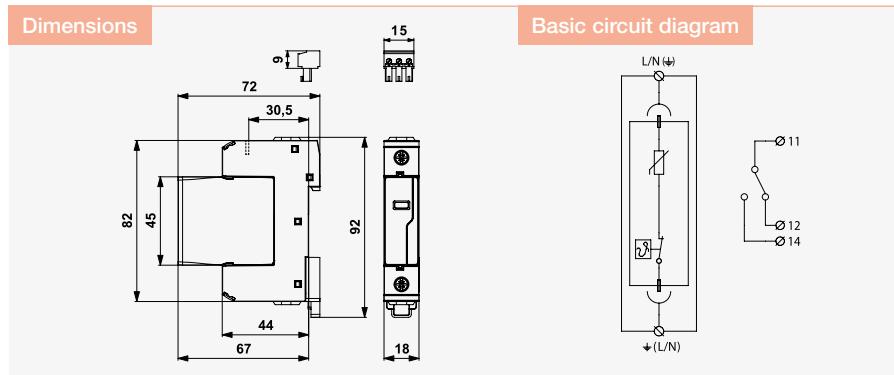

Parameter/Type	SLP-075 V/1 S	SLP-150 V/1 S	SLP-275 V/1 S	SLP-385 V/1 S	SLP-440 V/1 S	SLP-600 V/1 S
Nominal voltage U_n	60 V AC	120 V AC	230 V AC	-	400 V AC	230 ÷ 690 V AC
Maximum operating voltage of varistor	-	-	-	-	-	880 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	150 V AC / 200 V DC	275 V AC / 350 V DC	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,45 kV	0,9 kV	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	0,4 kV	0,7 kV	1,35 kV	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2					
Ordering number	A01823	A05186	A01618	A02771	A01825	A03302

ezü

ezü

ezü

VDE

ezü


ezü

Spare module	SLP-075 V/0	SLP-150 V/0	SLP-275 V/0	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01811	A05193	A02368	A01950	A01813	A03303

SLP-275 V/1(S)+1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling, module locking

- combination of varistor surge arrester and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, especially to sub-distribution boards in TT and also TN-S systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

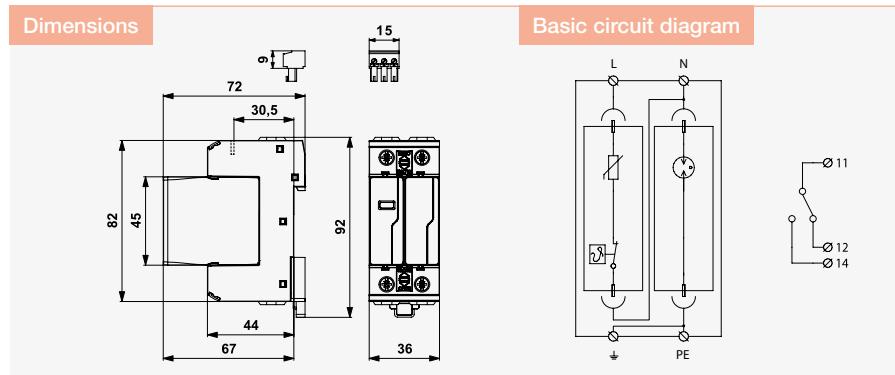

Parameter/Type	SLP-275 V/1+1	SLP-275 V/1S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	40 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	40 kA
Voltage protection level at 5 kA L-N	U_p	0,9 kV
Voltage protection level mode L-N	U_p	1,35 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_{fi}	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01948	A02491

ezü VDE

ezü VDE


Spare module	SLP-275 V/0	SLP-NPE V/0	SLP-275 V/0	SLP-NPE V/0
Ordering number	A02368	A03722	A02368	A03722

SLP-... V/2 (S)

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- two-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-S systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

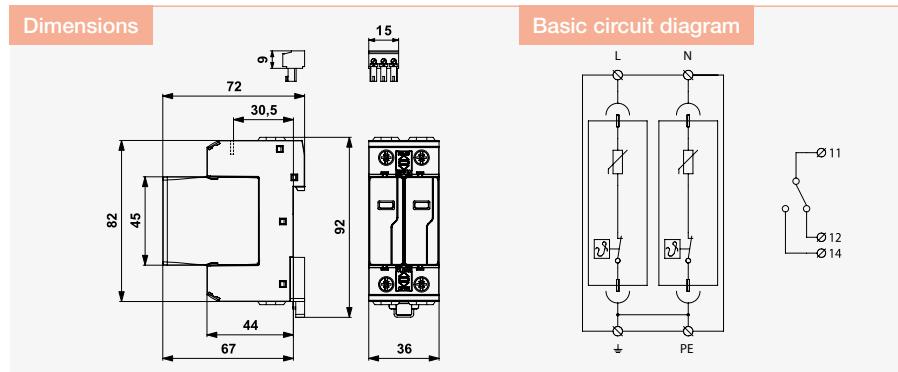

Parameter/Type	SLP-075 V/2	SLP-075 V/2 S	SLP-275 V/2	SLP-275 V/2 S
Nominal voltage U_n	60 V AC	60 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	75 V AC / 100 V DC	75 V AC / 100 V DC	275 V AC / 350 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	15 kA	15 kA	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,3 kV	0,3 kV	0,9 kV	0,9 kV
Voltage protection level U_p	0,4 kV	0,4 kV	1,35 kV	1,35 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2			
Ordering number	A07022	A07023	A01619	A05183

ezū

ezū

ezū VDE

ezū VDE

Spare module	SLP-075 V/0	SLP-075 V/0	SLP-275 V/0	SLP-275 V/0
Ordering number	A01811	A01811	A02368	A02368

SLP-275 V/3 (S)


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-C systems

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- optional remote fault signalling (S)

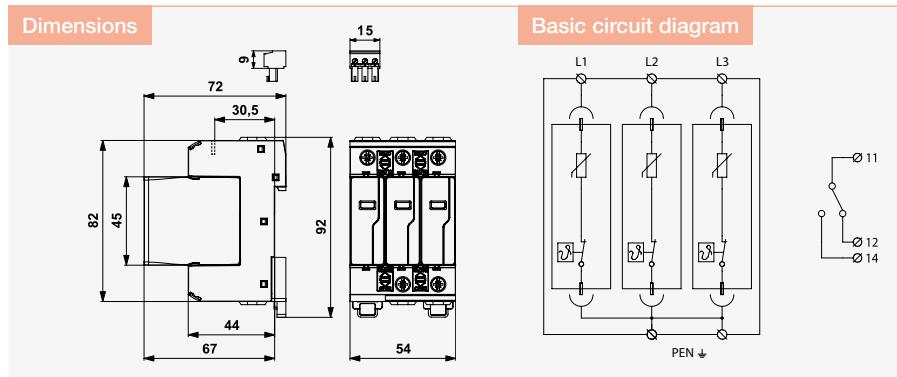

Parameter/Type	SLP-275 V/3	SLP-275 V/3 S
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s)	I_n	20 kA
Maximum discharge current (8/20 μ s)	I_{max}	40 kA
Voltage protection level at 5 kA	U_p	0,9 kV
Voltage protection level	U_p	1,35 kV
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time	t_a	25 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication		red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors		1,5 mm ²
Degree of protection		IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C
Mounting		DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01760	A01761

ezú VDE

ezú VDE

Spare module	SLP-275 V/0	SLP-275 V/0
Ordering number	A02368	A02368

SLP-275 V/4 (S)


SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- four-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN-S systems

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

- optional remote fault signalling (S)

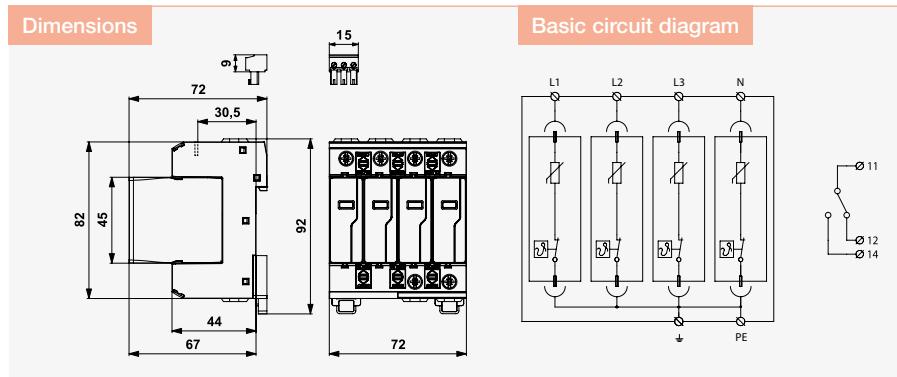

Parameter/Type	SLP-275 V/4	SLP-275 V/4 S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC / 350 V DC	275 V AC / 350 V DC
Nominal discharge current (8/20 μ s) I_n	20 kA	20 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA
Voltage protection level at 5 kA U_p	0,9 kV	0,9 kV
Voltage protection level U_p	1,35 kV	1,35 kV
Short-circuit current rating I_{SCCR}	50 kA	50 kA
Maximum overcurrent protection	160 A gL/gG	160 A gL/gG
Response time t_a	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01722	A01763

ezú VDE


ezú VDE

Spare module	SLP-275 V/0	SLP-275 V/0
Ordering number	A02368	A02368

SLP-275 V/3(S)+1

SPD type 2 – surge arrester, MOV
pluggable module, visual fault signalling, module locking

- combination of varistor surge arrester and encapsulated spark gap, connected in the 3+1 mode
- installation to LV installations, especially to sub-distribution boards in TT and also TN-S systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

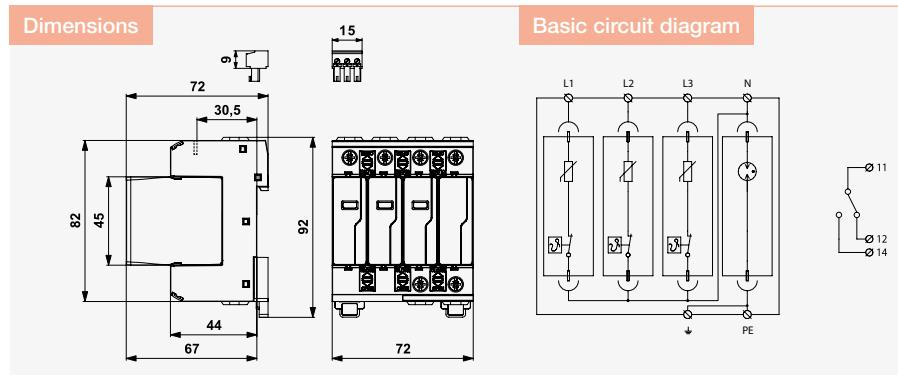

Parameter/Type	SLP-275 V/3+1	SLP-275 V/3S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max}	40 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max}	40 kA
Voltage protection level at 5 kA L-N	U_p	0,9 kV
Voltage protection level mode L-N	U_p	1,35 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_{fi}	0,1 kA
Short-circuit current rating	I_{SCCR}	50 kA
Maximum overcurrent protection		160 A gL/gG
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2	EN 61643-11:2012, IEC 61643-11:2011 / T2
Ordering number	A01946	A02002

ezü VDE

ezü VDE


Spare module	SLP-275 V/0	SLP-NPE V/0	SLP-275 V/0	SLP-NPE V/0
Ordering number	A02368	A03722	A02368	A03722

SLP-... V/3

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN, IT systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- suitable for the protection of wind farms and inverters

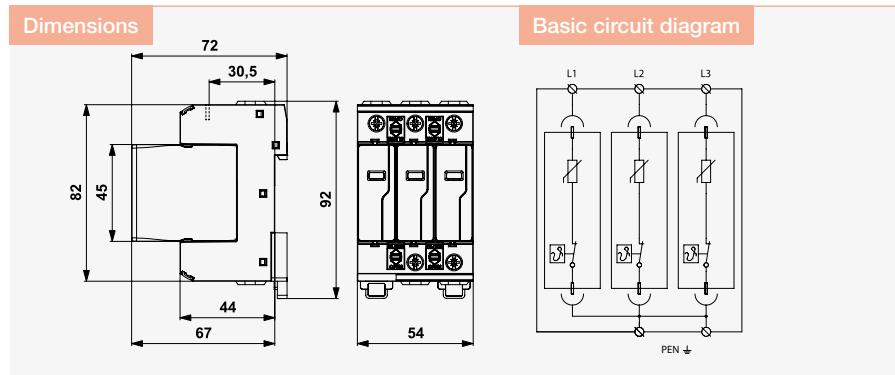

Parameter/Type	SLP-385 V/3	SLP-440 V/3	SLP-600 V/3
Nominal voltage U_n	230 V AC	400 V AC	230÷690 V AC
Maximum operating voltage U_c	385 V AC / 500 V DC	440 V AC / 585 V DC	760 V AC
Nominal load current I_n	20 kA	20 kA	15 kA
Maximum discharge current (8/20 μ s) I_{max}	40 kA	40 kA	40 kA
Voltage protection level at 5 kA U_p	1,3 kV	1,5 kV	2,7 kV
Voltage protection level U_p	1,8 kV	1,9 kV	3,2 kV
Short-circuit current rating I_{SCCR}	50 kA	25 kA	25 kA
Maximum overcurrent protection	160 A gL/gG	125 A gL/gG	100 A gL/gG
Response time t_a	25 ns	25 ns	25 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A01952	A01910	A06076


Spare module	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01950	A01813	A03303

SLP-... V/3 S

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signalling, module locking, remote fault signalling

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in TN, IT systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- suitable for the protection of wind farms and inverters

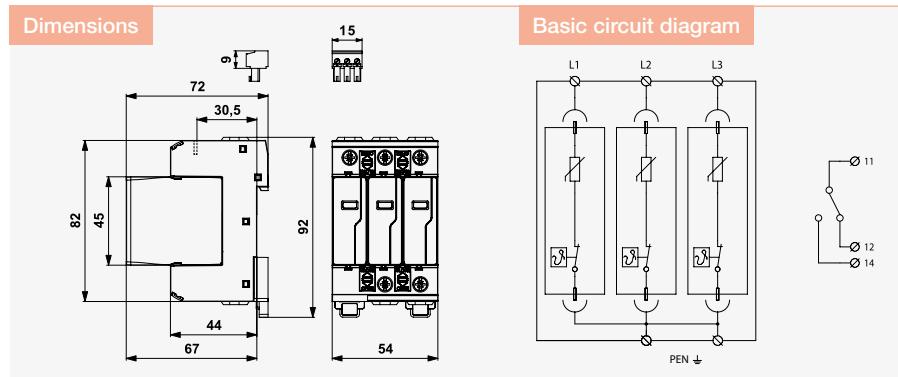

Parameter/Type	SLP-385 V/3 S	SLP-440 V/3 S	SLP-600 V/3 S
Nominal voltage	U_n 230 V AC	 400 V AC	 230÷690 V AC
Maximum operating voltage	U_c 385 V AC / 500 V DC	 440 V AC / 585 V DC	 760 V AC
Nominal load current	I_n 20 kA	 20 kA	 15 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA	 40 kA	 40 kA
Voltage protection level at 5 kA	U_p 1,3 kV	 1,5 kV	 2,7 kV
Voltage protection level	U_p 1,8 kV	 1,9 kV	 3,2 kV
Short-circuit current rating	I_{SCCR} 50 kA	 25 kA	 25 kA
Maximum overcurrent protection	 160 A gL/gG	 125 A gL/gG	 100 A gL/gG
Response time	t_a 25 ns	 25 ns	 25 ns
Cross-section of connected conductors solid (min/max)	 1 mm ² / 35 mm ²	 1 mm ² / 35 mm ²	 1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	 1 mm ² / 25 mm ²	 1 mm ² / 25 mm ²	 1 mm ² / 25 mm ²
Fault indication	 red indication field	 red indication field	 red indication field
Remote indication	 potential-free change-over contact	 potential-free change-over contact	 potential-free change-over contact
Remote indication contacts	 250 V / 0,5 A AC, 250 V / 0,1 A DC	 250 V / 0,5 A AC, 250 V / 0,1 A DC	 250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	 1,5 mm ²	 1,5 mm ²	 1,5 mm ²
Degree of protection	 IP 20	 IP 20	 IP 20
Range of operating temperatures (min/max)	 -40 °C / 80 °C	 -40 °C / 80 °C	 -40 °C / 80 °C
Mounting	 DIN rail 35 mm	 DIN rail 35 mm	 DIN rail 35 mm
According to standard	 EN 61643-11 ed.2 / T2	 EN 61643-11 ed.2 / T2	 EN 61643-11 ed.2 / T2
Ordering number	 A02633	 A01913	 A06305


Spare module	SLP-385 V/0	SLP-440 V/0	SLP-600 V/0
Ordering number	A01950	A01813	A03303

SLP-600-V/3YS-IT

SPD type 2 – surge arrester, MOV

pluggable module, visual fault signaling, module locking, remote fault signaling

- three-pole varistor surge arrester
- installation to LV installations, especially to sub-distribution boards in IT systems
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- remote fault signaling

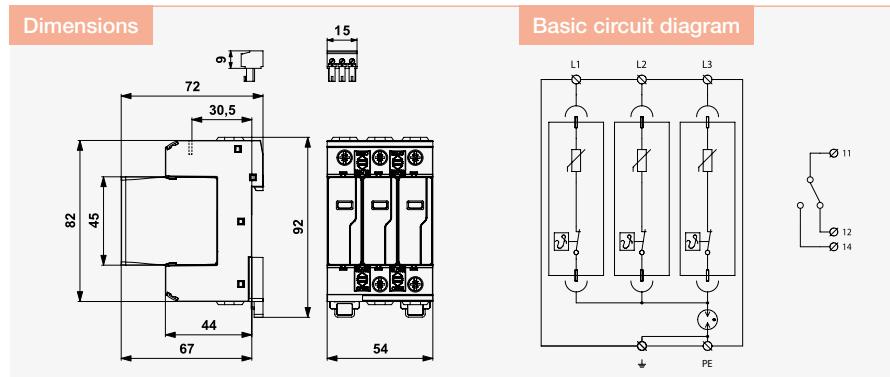

Parameter/Type	SLP-600-V/3YS-IT
Nominal voltage	U_n 400÷690 V AC
Maximum operating voltage	U_c 760 V AC
Nominal discharge current (8/20 μ s)	I_n 20 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA
Voltage protection level	U_p 3,4 kV
Voltage protection level at 5 kA	U_p 2,5 kV
Short-circuit current rating	I_{SCCR} 25 kA
Maximum overcurrent protection	100 A gL/gG
Response time	t_a 100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²
Fault indication	red indication field
Remote indication	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2
Ordering number	A04199

ezü

Spare module	SLP-600 V/0
Ordering number	A03303


SLP-...-VB/1

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signaling

- combined type surge arrester (serial combination of varistor+GDT)
- installation to LV installations, especially to sub-distribution boards in areas with unstable grid voltage and where diesel

- generators are used, suitable also for measuring circuits
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike

- in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits
- zero leakage current**

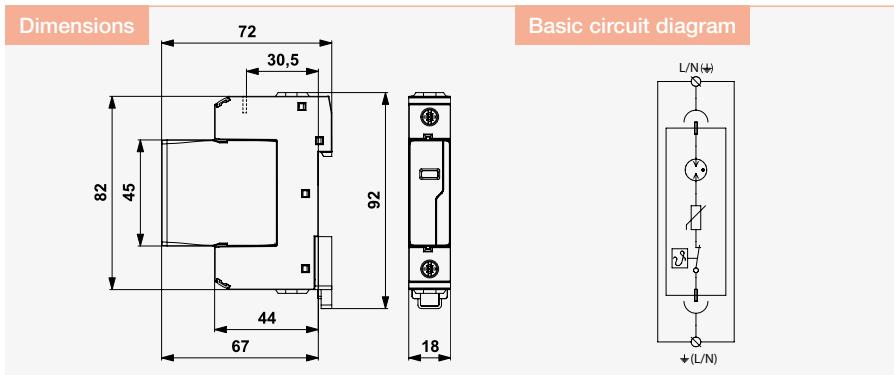

Parameter/Type	SLP-075-VB/1	SLP-150-VB/1	SLP-275-VB/1
Nominal voltage	U_n 48, 60 V AC	100–120 V AC	230 V AC
Nominal voltage DC	U_n 60 V DC	120 V DC	220 V DC
Maximum operating voltage	U_c 75 V AC	150 V AC	275 V AC
Nominal load current	I_n 20 kA	20 kA	20 kA
Maximum discharge current (8/20 μ s)	I_{max} 40 kA	40 kA	40 kA
Voltage protection level	U_p 0,7 kV	1,0 kV	1,4 kV
Voltage protection level at 5 kA (8/20 μ s)	U_{RES} 0,4 kV	0,6 kV	1,0 kV
Lightning impulse current (10/350 μ s)	I_{imp} 2,5 kA	2,5 kA	2,5 kA
Short-circuit current rating	I_{SCCR} 50 kA	50 kA	50 kA
Maximum overcurrent protection AC	125 A gL/gG	125 A gL/gG	125 A gL/gG
Maximum overcurrent protection DC	63 A	63 A	63 A
Threshold frequency	75 MHz	75 MHz	75 MHz
Response time	t_a 100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A07051	A07053	A07055

ezü

ezü

ezü

Spare module	SLP-075-VB/0	SLP-150-VB/0	SLP-275-VB/0
Ordering number	A07063	A07064	A07065

SLP-...-VB/1 S

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signaling


- combined type surge arrester (serial combination of varistor+GDT)
- installation to LV installations, especially to sub-distribution boards in areas with unstable grid voltage and where diesel

generators are used, suitable also for measuring circuits

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike

in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits

- zero leakage current

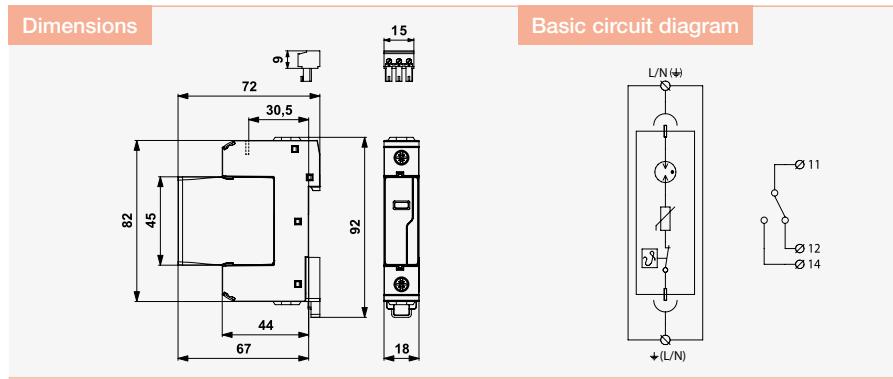

Parameter/Type	SLP-075-VB/1S	SLP-150-VB/1S	SLP-275-VB/1S
Nominal voltage	U_n 48, 60 V AC	100–120 V AC	230 V AC
Nominal voltage DC	U_n 60 V DC	120 V DC	220 V DC
Maximum operating voltage	U_c 75 V AC	150 V AC	275 V AC
Nominal load current	I_n 20 kA	20 kA	20 kA
Maximum discharge current (8/20 µs)	I_{max} 40 kA	40 kA	40 kA
Voltage protection level	U_p 0,7 kV	1,0 kV	1,4 kV
Voltage protection level at 5 kA (8/20 µs)	U_{RES} 0,4 kV	0,6 kV	1,0 kV
Lightning impulse current (10/350 µs)	I_{imp} 2,5 kA	2,5 kA	2,5 kA
Short-circuit current rating	I_{SCCR} 50 kA	50 kA	50 kA
Maximum overcurrent protection AC	125 A gL/gG	125 A gL/gG	125 A gL/gG
Maximum overcurrent protection DC	63 A	63 A	63 A
Threshold frequency	75 MHz	75 MHz	75 MHz
Response time	t_a 100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A07052	A07054	A07056

ezü

ezü

ezü

Spare module	SLP-075-VB/0	SLP-150-VB/0	SLP-275-VB/0
Ordering number	A07063	A07064	A07065

SLP-275-VB/1(S)+1

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signaling


- combination of combined type surge arrester (serial combination of varistor+GDT) and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, especially to sub-distribution boards in areas with

- unstable grid voltage and where diesel generators are used, suitable also for measuring circuits
- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike


- in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits
- zero leakage current
- optional remote fault signaling (S)



Dimensions



Basic circuit diagram



Parameter/Type	SLP-275-VB/1+1	SLP-275-VB/1S+1
Nominal voltage	U_n 230/400 V AC	230/400 V AC
Maximum operating voltage L-N	U_c 275 V AC	275 V AC
Maximum operating voltage N-PE	U_c 255 V AC	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n 20 kA	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 20 kA	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max} 40 kA	40 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max} 40 kA	40 kA
Voltage protection level mode L-N	U_p 1,4 kV	1,4 kV
Voltage protection level mode N-PE	U_p 2,5 kV	2,5 kV
Voltage protection level mode L-PE	U_p 1,5 kV	1,5 kV
Ability to independently switch off the following current N-PE	I_f 0,1 kA	0,1 kA
Voltage protection level at 5 kA (8/20 μ s)	U_{RES} 1,0 kV	1,0 kV
Lightning impulse current (10/350 μ s)	I_{imp} 2,5 kA	2,5 kA
Short-circuit current rating	I_{SCCR} 50 kA	50 kA
Maximum overcurrent protection	125 A gL/gG	125 A gL/gG
Response time	t_a 100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	potential-free change-over contact	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A07057	A07058

ezü

ezü

Spare module	SLP-275-VB/0	SLP-NPE V/0	SLP-275-VB/0
Ordering number	A07065	A03722	A07065

SLP-275-VB/3(S)+1

SPD type 2 – surge arrester, combination type
pluggable module, visual fault signaling


- combination of combined type surge arrester (serial combination of varistor+GDT) and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, especially to sub-distribution boards in areas with

unstable grid voltage and where diesel generators are used, suitable also for measuring circuits

- for protection of the installations and equipments against impact of induced overvoltages during a lightning strike

in areas with higher storm activity or switching overvoltages or as the first stage of for protection for measuring circuits

- zero leakage current
- optional remote fault signaling (S)

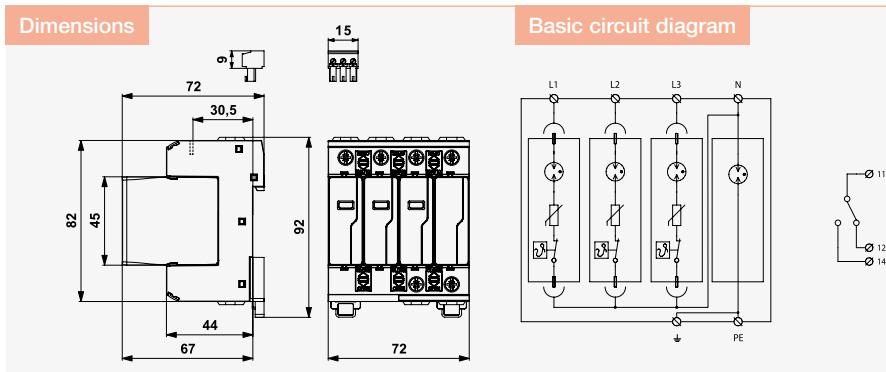

Parameter/Type	SLP-275-VB/3+1	SLP-275-VB/3S+1
Nominal voltage	U_n 230/400 V AC	230/400 V AC
Maximum operating voltage L-N	U_c 275 V AC	275 V AC
Maximum operating voltage N-PE	U_c 255 V AC	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n 20 kA	20 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 20 kA	20 kA
Maximum discharge current (8/20 μ s) L-N	I_{max} 40 kA	40 kA
Maximum discharge current (8/20 μ s) N-PE	I_{max} 40 kA	40 kA
Voltage protection level mode L-N	U_p 1,4 kV	1,4 kV
Voltage protection level mode N-PE	U_p 2,5 kV	2,5 kV
Voltage protection level mode L-PE	U_p 1,5 kV	1,5 kV
Ability to independently switch off the following current N-PE	I_f 0,1 kA	0,1 kA
Voltage protection level at 5 kA (8/20 μ s)	U_{RES} 1,0 kV	1,0 kV
Lightning impulse current (10/350 μ s)	I_{imp} 2,5 kA	2,5 kA
Short-circuit current rating	I_{SCCR} 50 kA	50 kA
Maximum overcurrent protection	125 A gL/gG	125 A gL/gG
Response time	t_a 100 ns	100 ns
Cross-section of connected conductors solid (min/max)	1 mm ² / 35 mm ²	1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)	1 mm ² / 25 mm ²	1 mm ² / 25 mm ²
Fault indication	potential-free change-over contact	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2	EN 61643-11 ed.2 / T2
Ordering number	A07059	A07060

ezü


ezü

Spare module	SLP-275-VB/0	SLP-NPE V/0	SLP-275-VB/0
Ordering number	A07065	A03722	A07065

SLP-NPE V/1

SPD type 2 – surge arrester
pluggable module

- N-PE protection module with a heavy duty GDT
- to divert currents 20 kA (8/20 µs), whilst guaranteeing a low voltage protection level
- for installation between N and PE

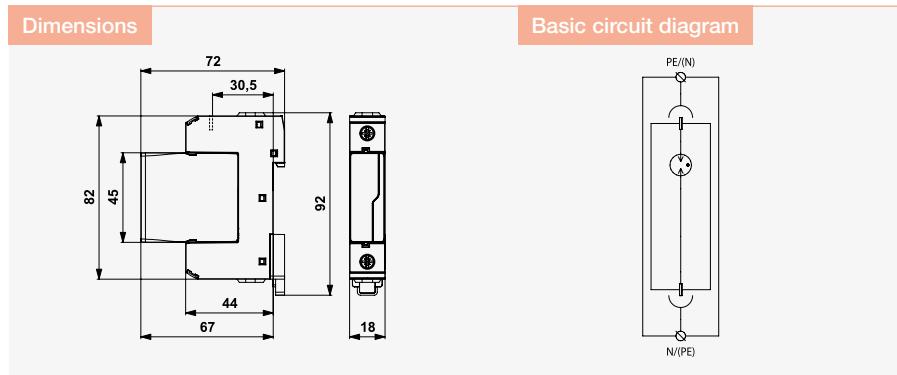


Parameter/Type	SLP-NPE V/1
Maximum operating voltage U_c	255 V AC
Nominal discharge current (8/20 µs) I_n	20 kA
Maximum discharge current (8/20 µs) I_{max}	40 kA
Voltage protection level mode U_p	1,5 kV
Response time t_a	100 ns
Ability to independently switch off the following current I_f	100 A
Cross-section of connected conductors solid (min/max)	4 mm ² / 50 mm ²
Cross-section of connected conductors stranded (min/max)	4 mm ² / 35 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11 ed.2 / T2
Ordering number	A03012

ezū VDE

Spare module	SLP-NPE V/0
Ordering number	A03722

SLP-... V/0


Replacement modules of SPD type 2

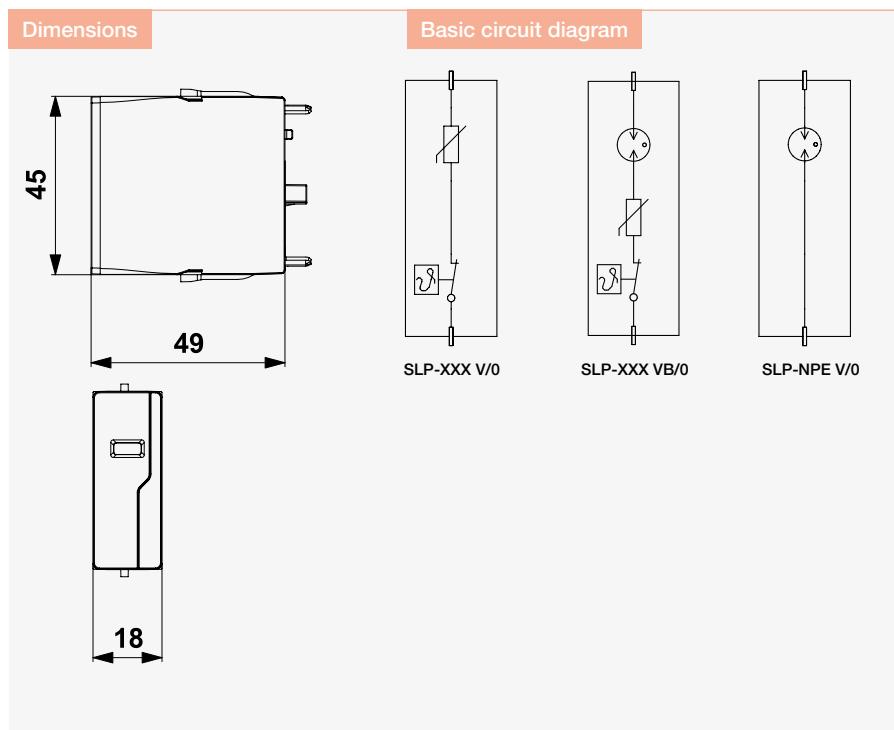

Type	Ordering number
SLP-075 V/0	A01811
SLP-150 V/0	A05193
SLP-275 V/0	A02368
SLP-385 V/0	A01950
SLP-440 V/0	A01813
SLP-600 V/0	A03303
SLP-NPE V/0	A03722
SLP-075 VB/0	A07063
SLP-150 VB/0	A07064
SLP-275 VB/0	A07065



Notes

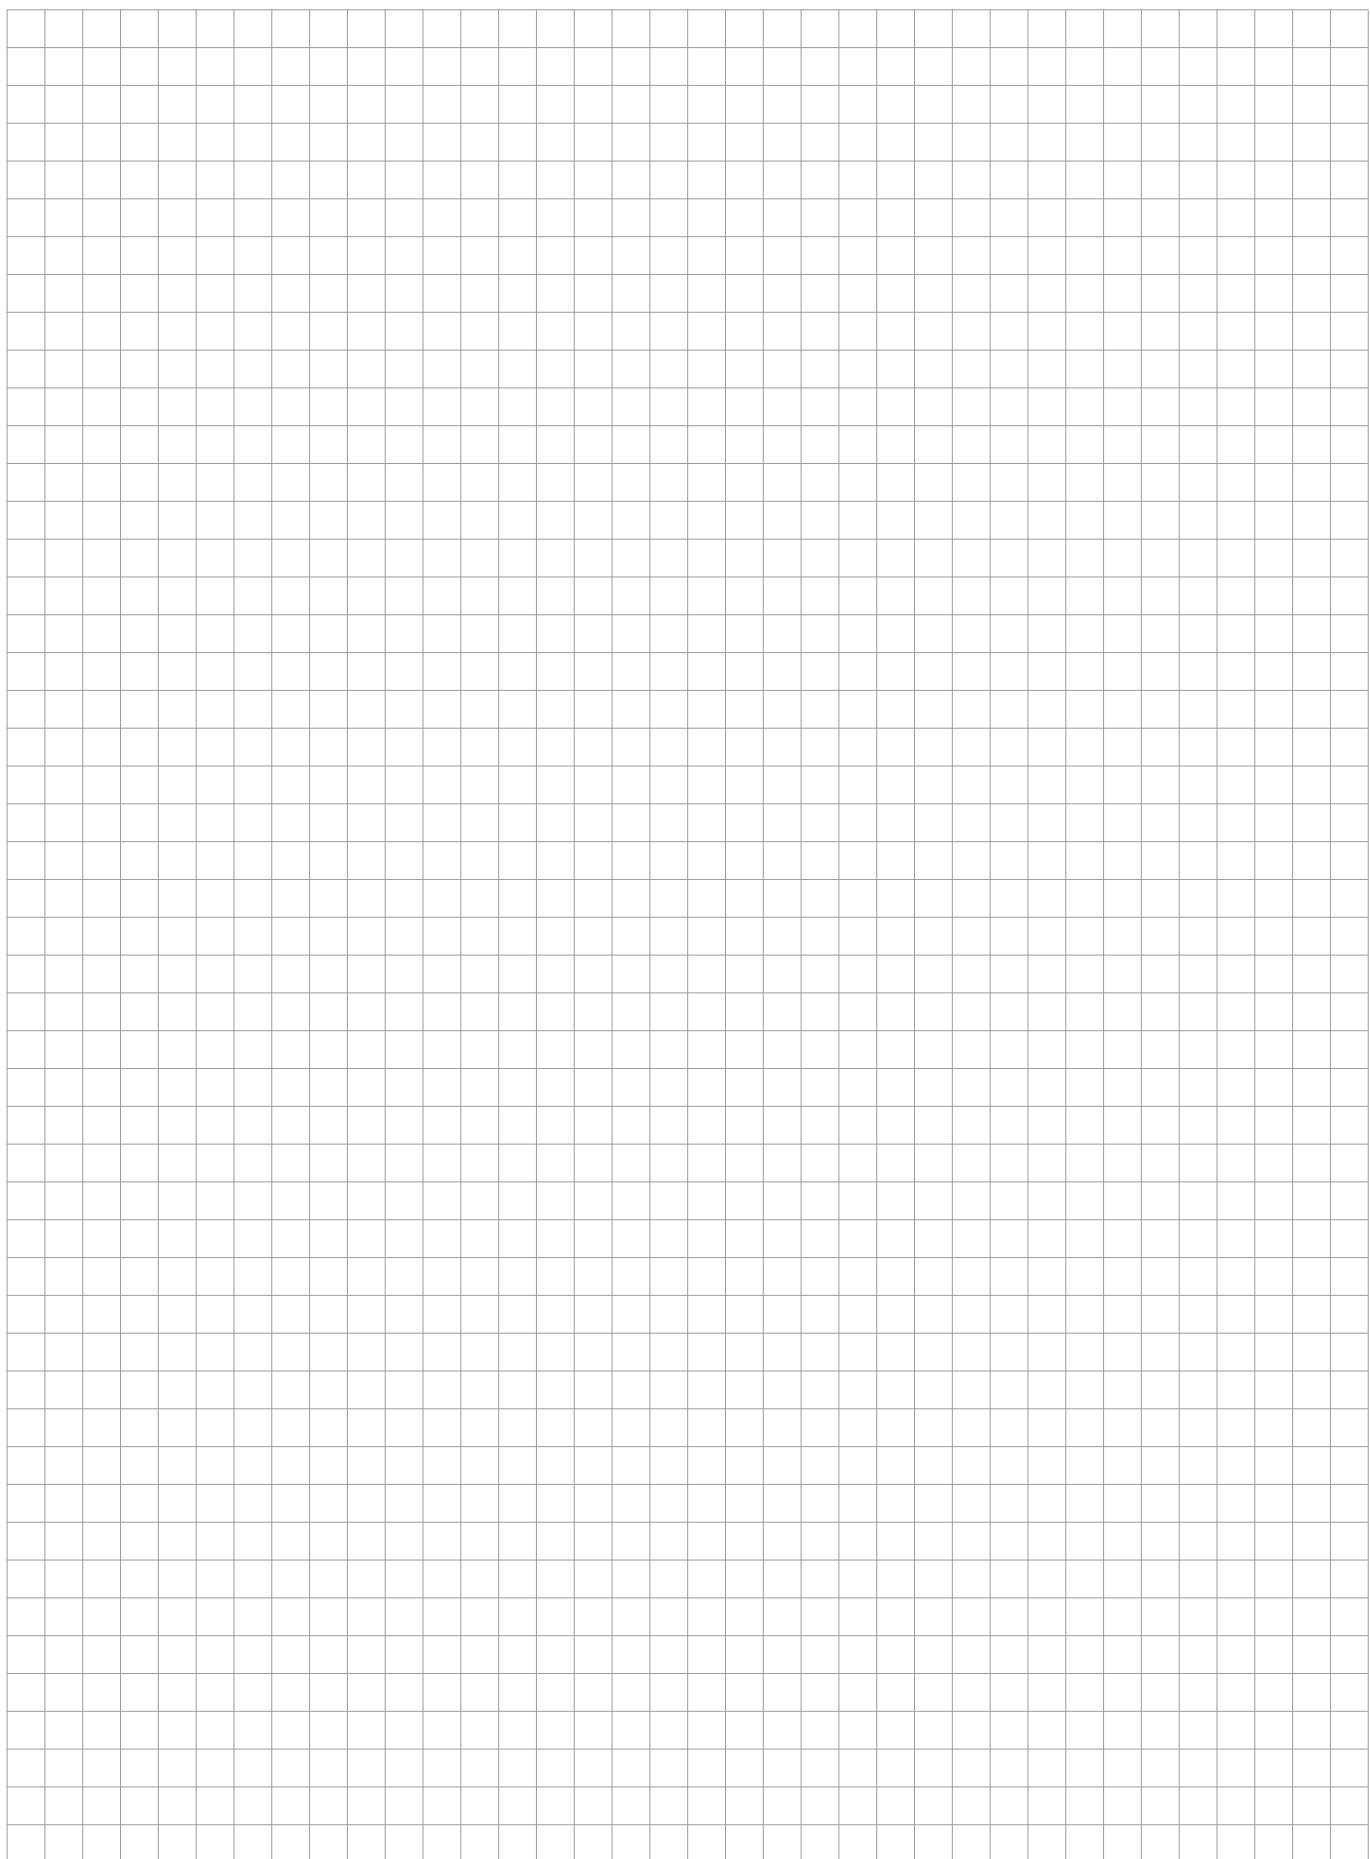A large grid of squares, approximately 20 columns by 20 rows, intended for handwritten notes.

SPDs connected to LV power supply systems up to 1 000 V

Surge Protections SPDs Type 3

The Type 3 SPD is a fine protection mostly used to protect extremely sensitive and expensive equipment or office equipment such as computers, TV sets, audio/video equipment and other computer equipment. Type 3 SPDs are most often installed in the form of so-called protected sockets or protected extension sockets

- Surge Protections, SPDs Type 3
- Installation close to protected equipment




as close as possible to the connection point of the electronic equipment, both in residential and business areas. Type 3 surge protection devices are also available with an integrated RF interference suppression filter to protect against RF interference.

- For DIN rail 35 mm
- With integrated RFi filter
- Modules for additional installation
- For 19" RACK enclosures

DA-275 V/1(S)+1

SPD type 3 – surge protection, basic on DIN rail
pluggable module, visual fault signalling, module locking

- combination of varistor SPD and encapsulated spark gap, connected in the 1+1 mode
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

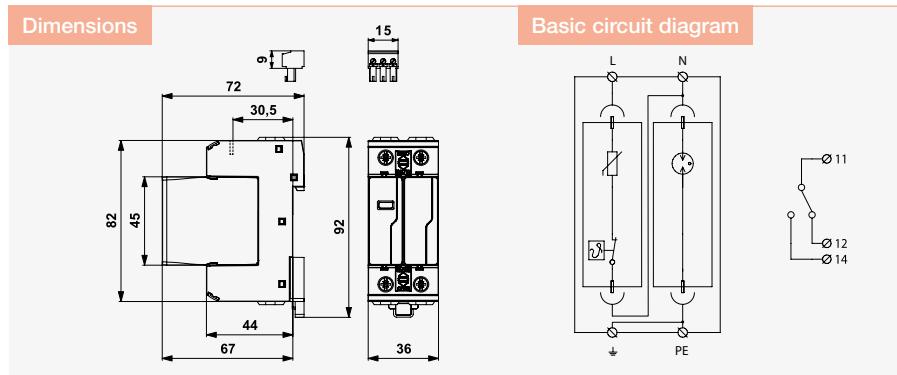

Parameter/Type	DA-275 V/1+1	DA-275 V/1S+1
Nominal voltage	U_n	230 V AC
Maximum operating voltage L-N	U_c	275 V AC
Maximum operating voltage N-PE	U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N	I_n	5 kA
Nominal discharge current (8/20 μ s) N-PE	I_n	10 kA
Test voltage L-N	U_{oc}	10 kV
Test voltage N-PE	U_{oc}	20 kV
Voltage protection level L-N	U_p	1 kV
Voltage protection level mode L-PE	U_p	1,5 kV
Voltage protection level mode N-PE	U_p	1,5 kV
Ability to independently switch off the following current N-PE	I_f	0,1 kA
Maximum overcurrent protection	63 A gL/gG or C 63 A	63 A gL/gG or C 63 A
Response time	t_a	25 ns
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01872	A01975

ezü


ezü

Spare module	DA-275 V/0	DA-NPE V/0	DA-275 V/0	DA-NPE V/0
Ordering number	A03594	A03004	A03594	A03004

DA-275 V/3(S)+1

SPD type 3 – surge protection, basic on DIN rail
pluggable module, visual fault signalling, module locking

- combination of varistor SPD and encapsulated spark gap, connected in the 3+1 mode
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

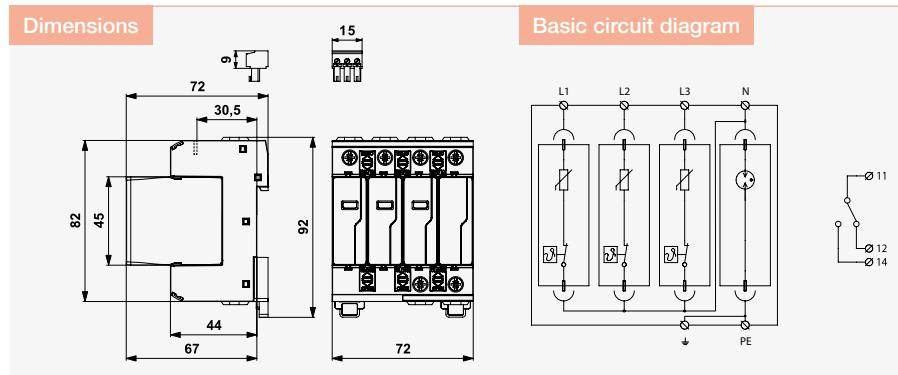

Parameter/Type	DA-275 V/3+1	DA-275 V/3S+1
Nominal voltage	U _n	230 V AC
Maximum operating voltage L-N	U _c	275 V AC
Maximum operating voltage N-PE	U _c	255 V AC
Nominal discharge current (8/20 µs) L-N	I _n	5 kA
Nominal discharge current (8/20 µs) N-PE	I _n	10 kA
Test voltage L-N	U _{oc}	10 kV
Test voltage N-PE	U _{oc}	20 kV
Voltage protection level mode L-N	U _p	1 kV
Voltage protection level mode N-PE	U _p	1,5 kV
Voltage protection level mode L-PE	U _p	1,5 kV
Ability to independently switch off the following current N-PE	I _f	0,1 kA
Maximum overcurrent protection	63 A gL/gG or C 63 A	63 A gL/gG or C 63 A
Response time	t _a	25 ns
Response time L-N	t _a	25 ns
Response time N-PE	t _a	100 ns
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication L-N		red indication field
Fault indication N-PE		no
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01848	A01849

ezü

ezü


Spare module	DA-275 V/0	DA-NPE V/0	DA-275 V/0	DA-NPE V/0
Ordering number	A03594	A03004	A03594	A03004

DA-... V/0


Replacement modules of SPD type 3




Dimensions

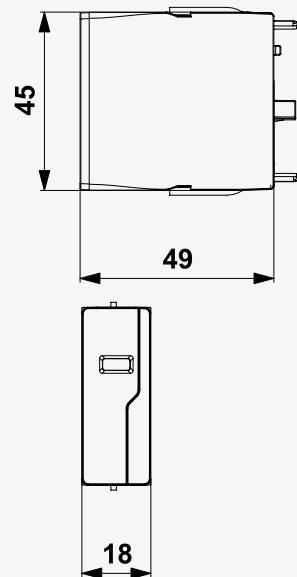

Basic circuit diagram



DA-275 V/0




DA-NPE V/0

Type	Ordering number
DA-275 V/0	A03594
DA-NPE V/0	A03004

DA-...-DJ25

SPD type 3 – surge protection, basic on DIN rail
visual fault signalling

- universally applicable SPD for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

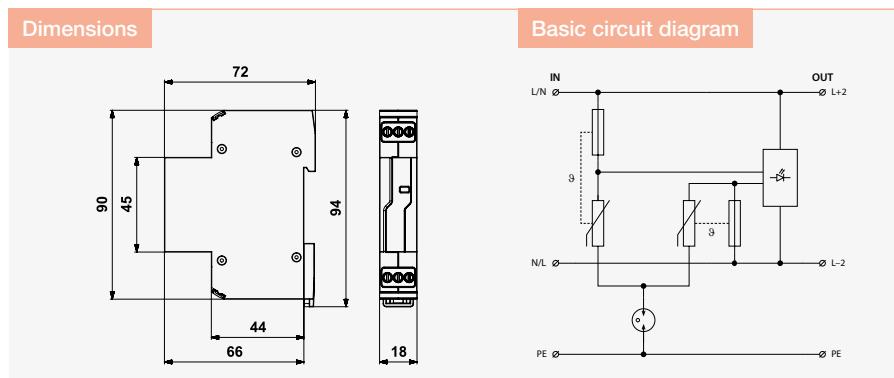

Parameter/Type	DA-075-DJ25	DA-150-DJ25
Nominal voltage U_n	60 V AC	120 V AC
Maximum operating voltage U_c	75 V AC	150 V AC
Nominal load current I_L	25 A	25 A
Nominal discharge current (8/20 µs) L-N I_n	2 kA	2,5 kA
Nominal discharge current (8/20 µs) N-PE I_n	2 kA	2,5 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	4 kA	5 kA
Test voltage L-N U_{oc}	4 kV	5 kV
Test voltage N-PE U_{oc}	4 kV	5 kV
Test voltage L+N-PE U_{oc}	8 kV	10 kV
Voltage protection level mode L-N U_p	0,43 kV	0,63 kV
Voltage protection level mode N-PE U_p	0,75 kV	1,1 kV
Voltage protection level mode L-PE U_p	0,75 kV	1,1 kV
Short-circuit current rating I_{SCCR}	1,5 kA	1,5 kA
Maximum overcurrent protection	25 A gL/gG or B 25 A	25 A gL/gG or B 25 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Fault indication	red indicator	red indicator
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06094	A06095


ezū

ezū

DA-275-DJ25-(S)

SPD type 3 – surge protection, basic on DIN rail
visual fault signalling

- universally applicable serially connected SPD for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages
- optional remote fault signalling (S)

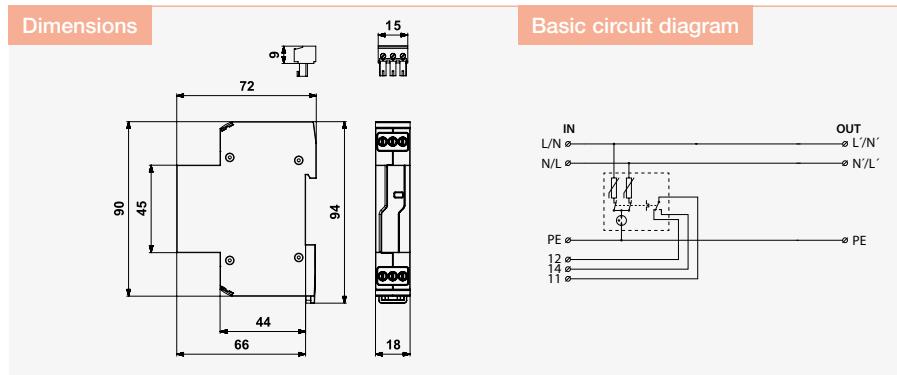


Parameter/Type	DA-275-DJ25	DA-275-DJ25-S
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC
Nominal load current I_L	25 A	25 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA
Maximum overcurrent protection	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Fault indication	red indicator	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A05770	A05771

DA-275-DF..

SPD type 3 – surge protection with RFi filter
visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

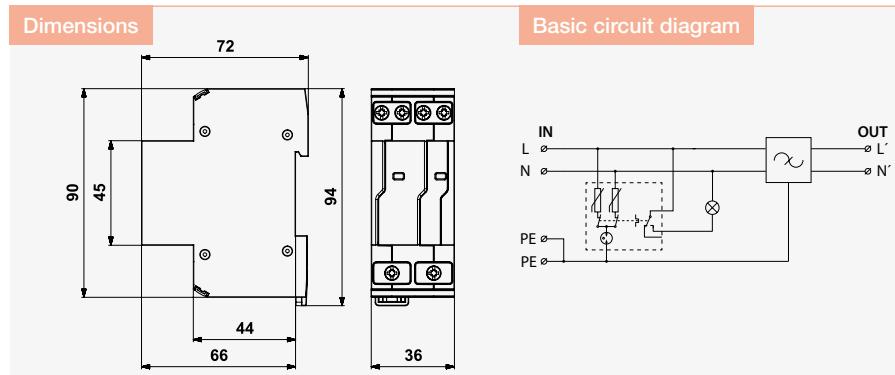

Parameter/Type	DA-275-DF2	DA-275-DF6	DA-275-DF10	DA-275-DF16
Nominal voltage U_n	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC	275 V AC	275 V AC
Nominal load current I_L	2 A	6 A	10 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA	6 kA	6 kA
Maximum overcurrent protection	2 A gL/gG or C 2 A	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	30 dB	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²			
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²			
Fault indication	red indicator	red indicator	red indicator	red indicator
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3			
Ordering number	A05715	A05717	A05719	A05721

ezū

ezū


ezū

ezū

DA-275-DF..-S

SPD type 3 – surge protection with RFi filter
visual and remote fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance

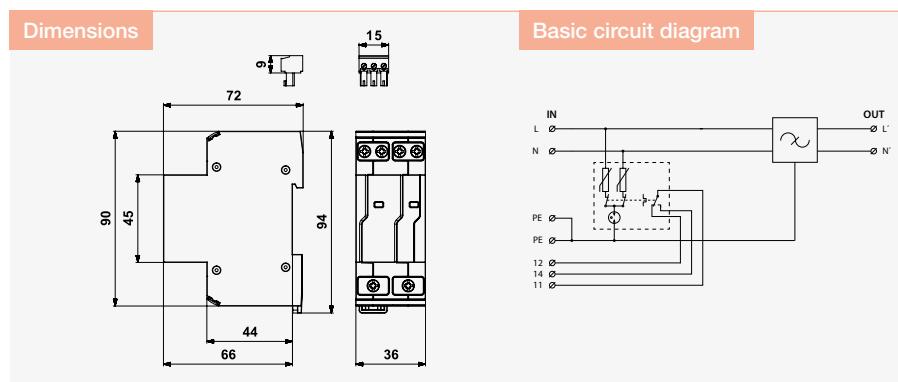

Parameter/Type	DA-275-DF2-S	DA-275-DF6-S	DA-275-DF10-S	DA-275-DF16-S
Nominal voltage	U_n 230 V AC	U_n 230 V AC	U_n 230 V AC	U_n 230 V AC
Maximum operating voltage	U_c 275 V AC	U_c 275 V AC	U_c 275 V AC	U_c 275 V AC
Nominal load current	I_L 2 A	I_L 6 A	I_L 10 A	I_L 16 A
Nominal discharge current (8/20 μ s) L-N	I_n 3 kA	I_n 3 kA	I_n 3 kA	I_n 3 kA
Nominal discharge current (8/20 μ s) N-PE	I_n 3 kA	I_n 3 kA	I_n 3 kA	I_n 3 kA
Nominal discharge current (8/20 μ s) L+N-PE	I_n 5 kA	I_n 5 kA	I_n 5 kA	I_n 5 kA
Test voltage L-N	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV
Test voltage N-PE	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV	U_{∞} 6 kV
Test voltage L+N-PE	U_{∞} 10 kV	U_{∞} 10 kV	U_{∞} 10 kV	U_{∞} 10 kV
Voltage protection level mode L-N	U_p 1,2 kV	U_p 1,2 kV	U_p 1,2 kV	U_p 1,2 kV
Voltage protection level mode N-PE	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV
Voltage protection level mode L-PE	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV	U_p 1,5 kV
Short-circuit current rating	I_{SCCR} 6 kA	I_{SCCR} 6 kA	I_{SCCR} 6 kA	I_{SCCR} 6 kA
Maximum overcurrent protection	2 A gL/gG or C 2 A	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N	t_a 25 ns	t_a 25 ns	t_a 25 ns	t_a 25 ns
Response time N-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Filter attenuation at 1MHz (50 Ω /50 Ω) unsymmetrical	30 dB	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²			
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²			
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact	potential-free change-over contact
Remote indication contacts	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3			
Ordering number	A05716	A05718	A05720	A05722

ezü

ezü

ezü


ezü

DA-275 BFG

SPD type 3 – surge protection with RFi filter

visual fault signalling, grounding terminal, class I device

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance


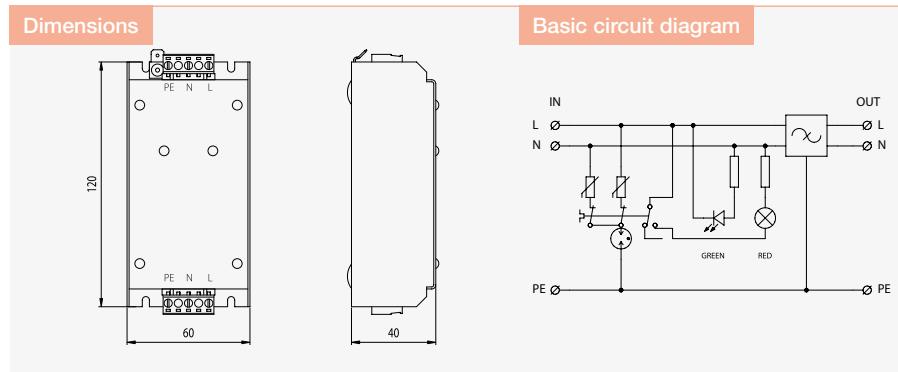


Parameter/Type	DA-275 BFG
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal load current I_L	16 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Test voltage L+N-PE U_{oc}	10 kV
Voltage protection level mode L-N U_p	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Filter attenuation at 1MHz ($50 \Omega / 50 \Omega$) unsymmetrical	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²
Fault indication	red indicator
Remote indication	no
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	surface on the desk
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A00629

DA-275 DFI 1

SPD type 3 – surge protection with RFi filter
fault signalling due to power supply interruption

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance
- priority of protection

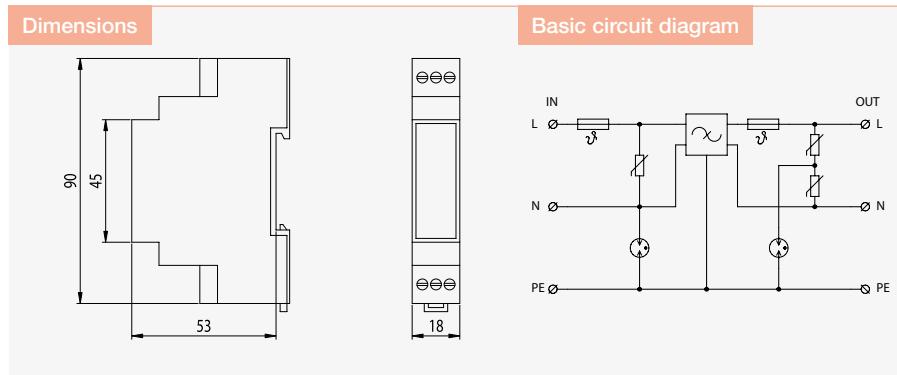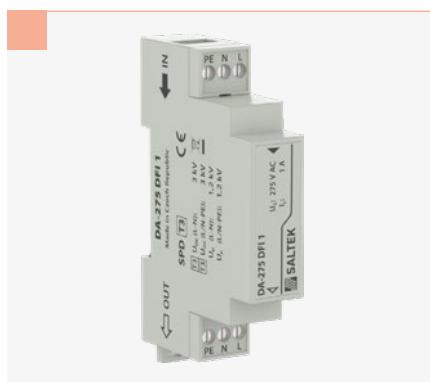


Parameter/Type	DA-275 DFI 1
Nominal voltage	U _n 230 V AC
Maximum operating voltage	U _c 275 V AC
Nominal load current	I _L 1 A
Nominal discharge current (8/20 µs) L-N	I _n 1,5 kA
Nominal discharge current (8/20 µs) N-PE	I _n 1,5 kA
Test voltage L-N	U _{oc} 3 kV
Test voltage N-PE	U _{oc} 3 kV
Voltage protection level mode L-N	U _p 1,2 kV
Voltage protection level mode N-PE	U _p 1,2 kV
Maximum overcurrent protection	1 A gL/gG or C 1 A
Response time L-N	t _a 25 ns
Response time N-PE	t _a 100 ns
Filter attenuation at 1MHz (50 Ω/50 Ω unsymmetrical)	50 dB
Cross-section of connected conductors solid (min/max)	0,14 mm² / 4 mm²
Cross-section of connected conductors stranded (min/max)	0,14 mm² / 2,5 mm²
Fault indication	supply interruption
Remote indication	no
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01205

DA-275-DFi..

SPD type 3 – surge protection with RFi filter

fault signalling due to power supply interruption, visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance
- priority of protection

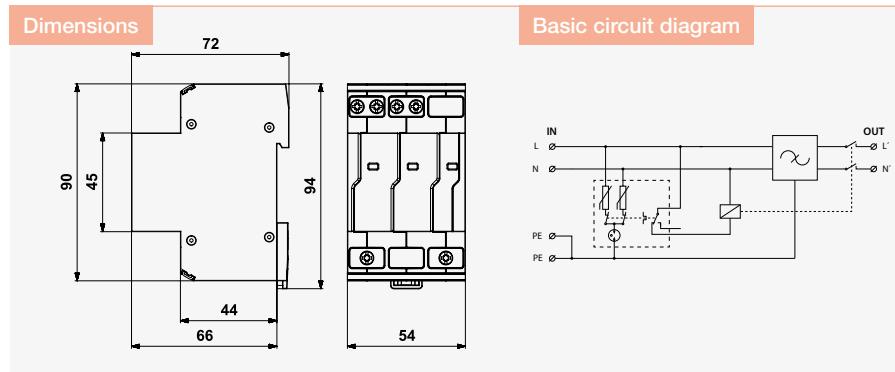

Parameter/Type	DA-275-DFi6	DA-275-DFi10	DA-275-DFi16
Nominal voltage U_n	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC	275 V AC
Nominal load current I_L	6 A	10 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA	6 kA
Maximum overcurrent protection	6 A gL/gG or C 6 A	10 A gL/gG or C 10 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²	0,14 mm ² / 6 mm ²
Fault indication	red indication field, supply interruption	red indication field, supply interruption	red indication field, supply interruption
Cross-section of remote indication conductors solid (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²
Cross-section of remote indication conductors stranded (max)	1,5 mm ²	1,5 mm ²	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	-	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A05723	A05724	A05725

ezū


ezū

ezū

DA-275-BFi2

SPD type 3 – surge protection with RFi filter
fault signalling due to power supply interruption

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, etc. against impact of surge voltage and RF disturbance
- priority of protection

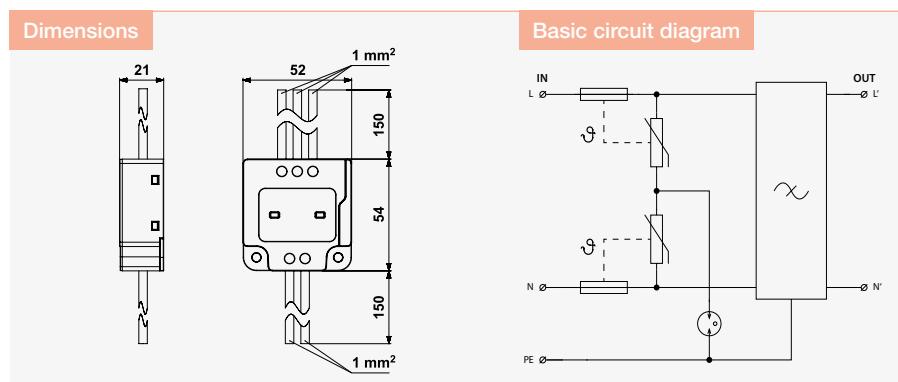


Parameter/Type	DA-275-BFi2
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal load current I_L	2 A
Nominal discharge current (8/20 µs) L-N I_n	3 kA
Nominal discharge current (8/20 µs) N-PE I_n	3 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	5 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Test voltage L+N-PE U_{oc}	10 kV
Voltage protection level mode L-N U_p	1,65 kV
Voltage protection level mode L(N)-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	3 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time L(N)-PE t_a	100 ns
Filter attenuation at 1MHz ($50 \Omega/50 \Omega$) unsymmetrical	20 dB
Fault indication	loss of voltage
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06262

CZ-275-A

SPD type 3 – module of surge protection for build in acoustic fault signalling

- SPD for additional installation to devices or equipments
- for protection of all LV equipments against surge voltage
- installation to LV installations, close to protected equipment
- non-symetrical connection

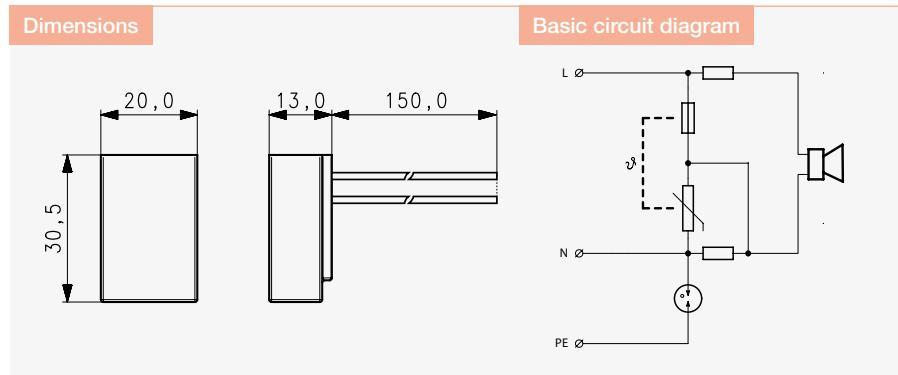


Parameter/Type	CZ-275-A
Nominal voltage U_n	230 V AC
Maximum operating voltage L-N U_c	275 V AC
Maximum operating voltage N-PE U_c	255 V AC
Nominal discharge current (8/20 μ s) L-N I_n	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	6 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Voltage protection level mode L-N U_p	1,35 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	acoustic signalling
Degree of protection	IP 20
Range of operating temperatures (min/max)	-20 °C / 70 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06737

ezú

DA-275 CZS

SPD type 3 – module of surge protection for build in
remote fault signalling

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- non-symmetrical connection

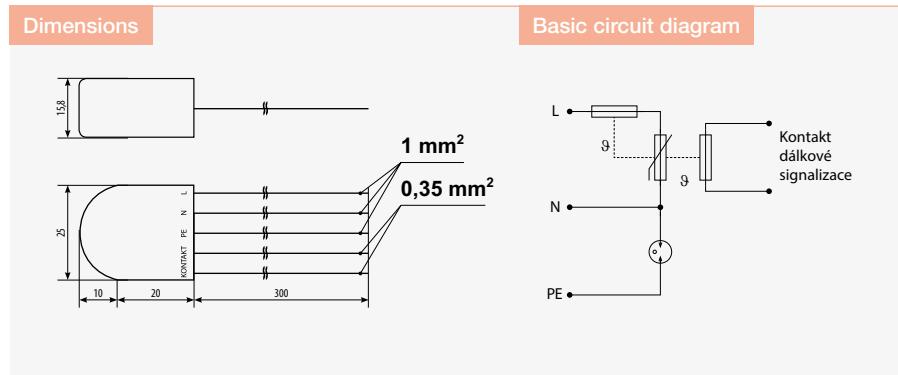

Parameter/Type	DA-275 CZS
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal discharge current (8/20 μ s) L-N I_n	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA
Test voltage L-N U_{oc}	6 kV
Test voltage N-PE U_{oc}	6 kV
Voltage protection level mode L-N U_p	1,35 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	open contact
Remote indication	potential-free open contact
Remote indication contacts	230 V / 0,5 A AC, 24 V / 0,5 A DC
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A01916

ezú



DA-275-A

SPD type 3 – module of surge protection for build in acoustic fault signalling


- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- can be used for single-phase power supply networks with isolation transformer, connection of L and N wires can be changed



Dimensions



Basic circuit diagram




Parameter/Type	DA-275-A
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal discharge current (8/20 µs) L-N I_n	2 kA
Nominal discharge current (8/20 µs) N-PE I_n	2 kA
Nominal discharge current (8/20 µs) L+N-PE I_n	4 kA
Test voltage L-N U_{oc}	4 kV
Test voltage N-PE U_{oc}	4 kV
Test voltage L-PE U_{oc}	4 kV
Test voltage L+N-PE U_{oc}	8 kV
Voltage protection level mode L-N U_p	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	acoustic signalling
Degree of protection	IP 20
Range of operating temperatures (min/max)	-20 °C / 70 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06738

ezū

DA-275-S

SPD type 3 – module of surge protection for build in
remote fault signalling

- SPD for additional installation to devices or equipments
- installation to LV installations, close to protected equipment
- for protection of all LV equipments against surge voltage
- can be used for single-phase power supply networks with isolation transformer, connection of L and N wires can be changed

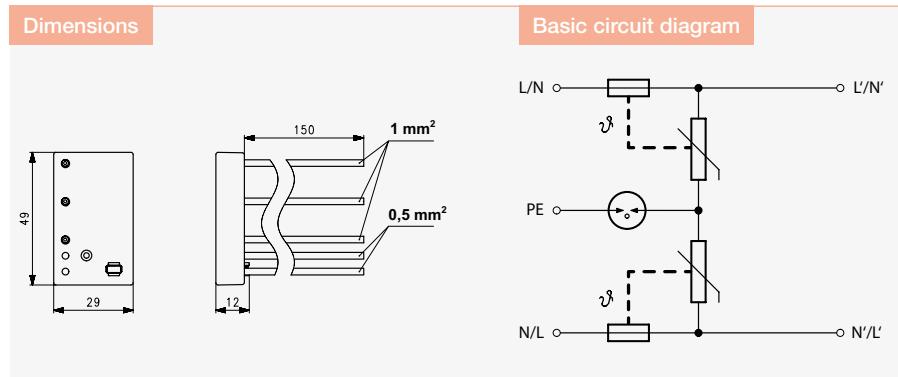



Parameter/Type	DA-275-S
Nominal voltage U_n	230 V AC
Maximum operating voltage U_c	275 V AC
Nominal discharge current (8/20 μ s) L-N I_n	2 kA
Nominal discharge current (8/20 μ s) N-PE I_n	2 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	4 kA
Test voltage L-N U_{oc}	4 kV
Test voltage N-PE U_{oc}	4 kV
Test voltage L-PE U_{oc}	4 kV
Test voltage L+N-PE U_{oc}	8 kV
Voltage protection level mode L-N U_p	1,5 kV
Voltage protection level mode N-PE U_p	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV
Short-circuit current rating I_{SCCR}	1,5 kA
Maximum overcurrent protection	B 16 A
Response time L-N t_a	25 ns
Response time N-PE t_a	100 ns
Fault indication	loss of voltage
Remote indication	potential open contact
Maximum current of signalling	1 A
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06739

ezÜ

RACK-PROTECTOR-...-1U

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 3 m power supply cord, CEE 7/7 type plug

- variants with/without on/off switch and with/without RFi filter
- with French type (earthing pin) and Euro type sockets
- for protection of information technological equipments against surge voltage and possibly RF interference
- mounting height 1U
- X8: 8 sockets
- VX7: on/off switch, 7 sockets
- F6: RFi filter, 6 sockets
- VF5: RFi filter, on/off switch, 5 sockets
- EURO-X12: 12 Euro sockets

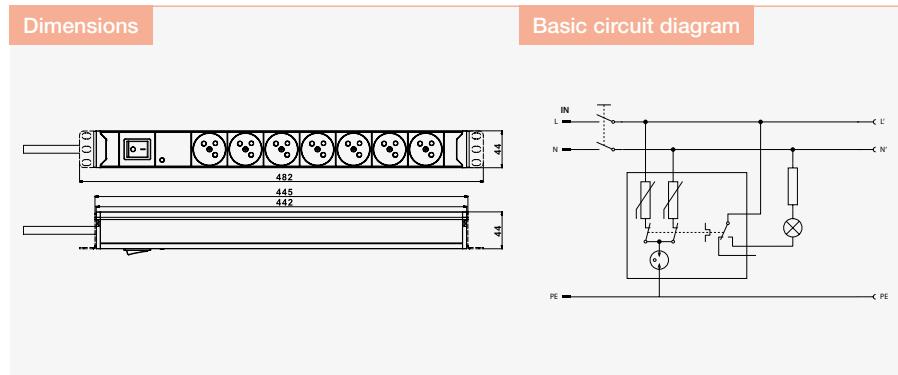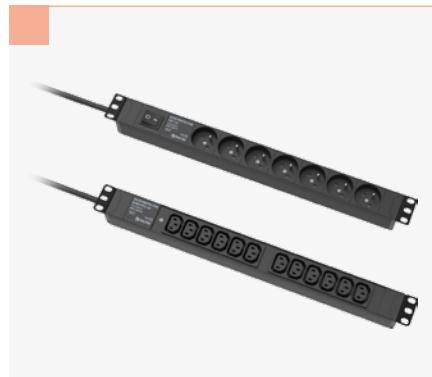

Parameter/Type	RACK-PROTECTOR-X8-1U	RACK-PROTECTOR-VX7-1U	RACK-PROTECTOR-F6-1U	RACK-PROTECTOR-VF5-1U	RACK-PROTECTOR-EURO-X12-1U
Nominal voltage	U _n 230 V AC	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage	U _c 275 V AC	275 V AC	275 V AC	275 V AC	275 V AC
Nominal load current	I _L 16 A	16 A	16 A	16 A	16 A
Nominal discharge current (8/20 µs) L-N	I _n 3 kA	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) N-PE	I _n 3 kA	3 kA	3 kA	3 kA	3 kA
Nominal discharge current (8/20 µs) L+N-PE	I _n 5 kA	5 kA	5 kA	5 kA	5 kA
Test voltage L-N	U _{oc} 6 kV	6 kV	6 kV	6 kV	6 kV
Test voltage N-PE	U _{oc} 6 kV	6 kV	6 kV	6 kV	6 kV
Test voltage L+N-PE	U _{oc} 10 kV	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N	U _p 1,2 kV	1,2 kV	1,2 kV	1,2 kV	1,2 kV
Voltage protection level mode N-PE	U _p 1,5 kV	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE	U _p 1,5 kV	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating	I _{SCCR} 6 kA	6 kA	6 kA	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N	t _a 25 ns	25 ns	25 ns	25 ns	25 ns
Response time N-PE	t _a 100 ns	100 ns	100 ns	100 ns	100 ns
RFi filter	-	-	yes	yes	-
Filter attenuation at 1MHz (50 Ω//50 Ω)/ unsymmetrical	-	-	30 dB	30 dB	-
Fault indication	red indicator	red indicator	red indicator	red indicator	red indicator
Degree of protection	IP 40	IP 40	IP 40	IP 40	IP 20
Range of operating temperatures (min/max)	-5 °C / 40 °C	-5 °C / 40 °C	-5 °C / 40 °C	-5 °C / 40 °C	-5 °C / 40 °C
Mounting	19" rack	19" rack	19" rack	19" rack	19" rack
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3				
Ordering number	A05872	A05873	A05874	A05875	A05961

ezü

ezü


ezü

ezü

RACK-PROTECTOR-...-1U-5

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 5 m power supply cord, CEE 7/7 type plug

- variants with/without RFi filter
- with French type (earthing pin) and Euro type sockets
- for protection of information technological equipments against surge voltage and possibly RF interference
- mounting height 1U
- X8: 8 sockets
- F6: RFi filter, 6 sockets
- EURO-X12: 12 Euro sockets

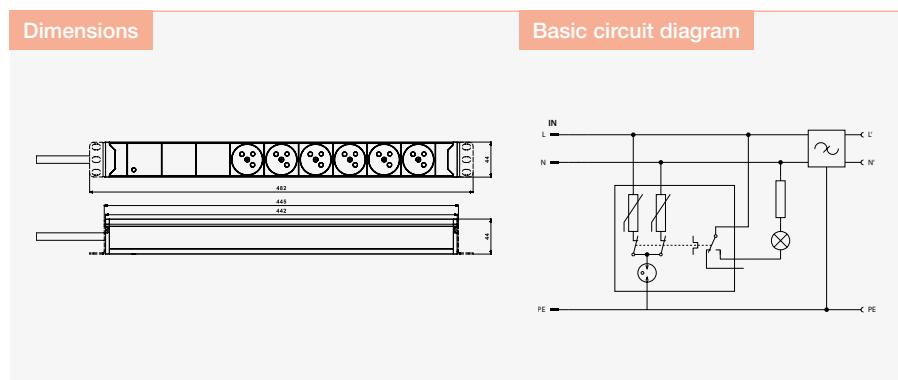


Parameter/Type	RACK-PROTECTOR-X8-1U-5	RACK-PROTECTOR-EURO-X12-1U-5
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC
Nominal load current I_L	16 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
RFi filter	-	-
Filter attenuation at 1MHz (50 Ω /50 Ω) unsymmetrical	-	-
Fault indication	red indicator	red indicator
Degree of protection	IP 40	IP 20
Range of operating temperatures (min/max)	-5 °C / 40 °C	-5 °C / 40 °C
Mounting	19" rack	19" rack
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	
Ordering number	A07009	A07008

ezū

RACK-PROTECTOR-...-1U-PI

SPD type 3 – multiple socket outlet with surge protection for 19" RACK
visual fault signalling, 3 m power supply cord, industrial plug 16 A 2P+PE

- with French type (earthing pin) and Euro type sockets
- mounting height 1U
- X8: 8 sockets
- for protection of information technological equipments against surge voltage
- EURO-X12: 12 Euro sockets

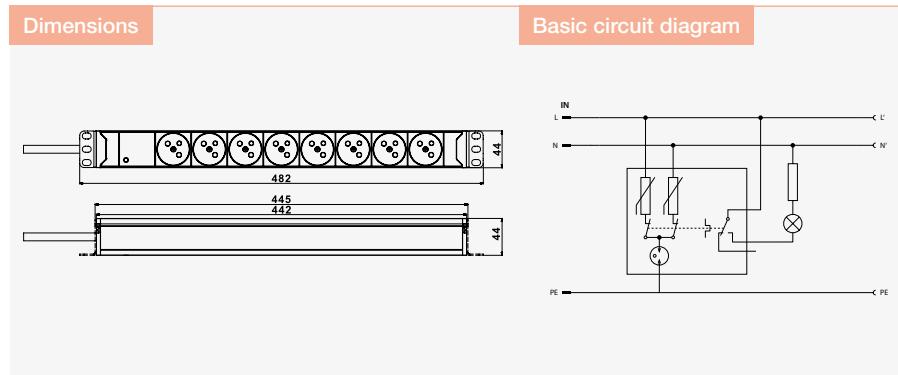


Parameter / Type	RACK-PROTECTOR-X8-1U-PI	RACK-PROTECTOR-EURO-X12-1U-PI
Nominal voltage U_n	230 V AC	230 V AC
Maximum operating voltage U_c	275 V AC	275 V AC
Nominal load current I_L	16 A	16 A
Nominal discharge current (8/20 μ s) L-N I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) N-PE I_n	3 kA	3 kA
Nominal discharge current (8/20 μ s) L+N-PE I_n	5 kA	5 kA
Test voltage L-N U_{oc}	6 kV	6 kV
Test voltage N-PE U_{oc}	6 kV	6 kV
Test voltage L+N-PE U_{oc}	10 kV	10 kV
Voltage protection level mode L-N U_p	1,2 kV	1,2 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	6 kA	6 kA
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L-N t_a	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns
Fault indication	red indicator	red indicator
Degree of protection	IP 40	IP 20
Range of operating temperatures (min/max)	-5 °C / 40 °C	-5 °C / 40 °C
Mounting	19" rack	19" rack
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3	
Ordering number	A06255	A06256

RTO-...

Separating inductor (bridge) for coordination

- coupling impedance
- for coordination of SPDs Type 1 and 2 or Type 2 and 3

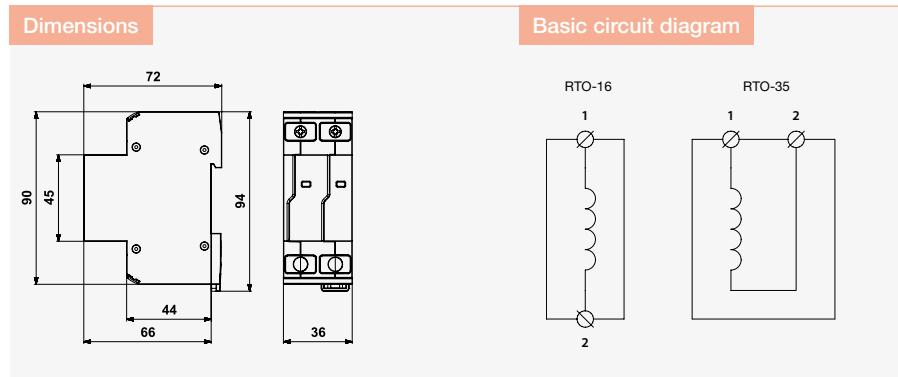

Parameter / Type	RTO-16	RTO-35
Nominal voltage	U_n	450 V AC
Frequency	f	50 Hz
Nominal load current	I_L	16 A
Maximum overcurrent protection	16 A gL/gG or C 16 A	32 A gL/gG or C 32 A
Resistance	R	6,5 mΩ
Inductance	L	3,2 µH
Power loss at I_L	1,66 W	3,68 W
Cross-section of connected conductors solid (min/max)	10 mm ²	10 mm ²
Cross-section of connected conductors stranded (min/max)	10 mm ²	10 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 40 °C	-40 °C / 30 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
Ordering number	A04177	A04178

Surge Protective Devices for LED lights

Surge arresters, SPDs Type 2 and 3



The current requirements for lighting quality and energy efficiency are achieved by new technologies, especially the LED (Light-Emitting Diode) technology. LED manufacturers declare long service life, trouble-free operation and lower energy consumption. However, these properties are

compensated by a higher purchase price. The use of surge protection is therefore a practical necessity. But what equipment should we protect such devices with? With surge protection devices (SPDs) designed for LED technology.

- Lighting systems with LED technology
- Street lighting
- Traffic lights
- Lighting of industry facilities
- DA-320-LED
- SP-T2+T3-320-Y-....-LED

Protection of (street) lighting

Current requirements for the quality of lighting and energy efficiency bring frequent use of LED technology. Such technologies offer a long service life under standard operating conditions which corresponds to higher investment costs. Electronic control devices of LED lighting are considerably more sensitive to high voltage impulses than, for example, gas discharge tube lighting. Overvoltage in these installations is usually higher than the required withstand impulse voltage of electronic lighting equipment. Overvoltage protection is also necessary due to large-scale installations of street lighting and lighting in large industrial factories, which increase the risk particularly of induced overvoltage caused by lightning strikes, failures and switching in distribution and transmission networks.

SPDs are recommended to be installed as close as possible to the light source. The **DA-320-LED** and **SP-T2+T3-320/Y-CLT-LED** types meet these requirements. Considering the risk and installation method it is also advisable to install FLP-12,5 V or SLP-275 arresters in supply distribution boards or at the bottom of the light pole. DA-320-LED and SP-T2+T3-320/Y-CLT-LED meet the requirements of the IEEE (ANSI) C62.41.2 standard concerning C location - outside a structure (building). These requirements are stipulated in this standard for situations where overvoltage protection is also provided at the entrance of the wiring, i.e., at the connecting point to the distribution system. If a light source class II equipment, SPDs are connected at the interface of the wiring and the electrical equipment. Also in this case, an SPD will be connected to protective earth (PE). These SPDs can also be used to protect other electrical equipment whose wiring is similar to lighting wiring.

The DA-320-LED and SP-T2+T3-320/Y-CLT-LED types are designed as transit modules with the priority placed on protection. If the SPD is damaged, the light source will be disconnected from the supply and not illuminate. This simple method makes it possible to locate the fault. These SPDs can also be connected in parallel to the protected circuit and the SPD output used to signal the SPD status.

Fig. 01 Wiring of SPD to Class I equipment

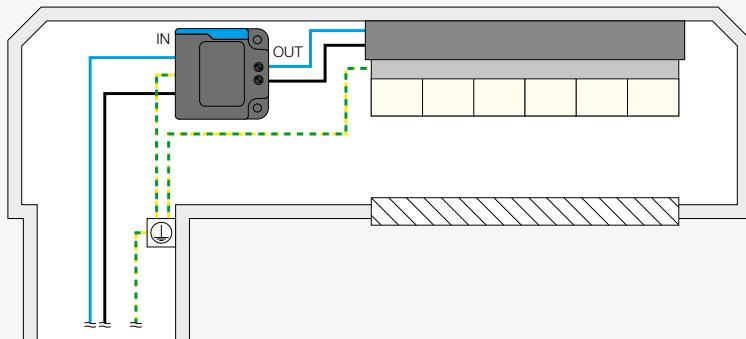


Fig. 02 Wiring of SPD to Class II equipment




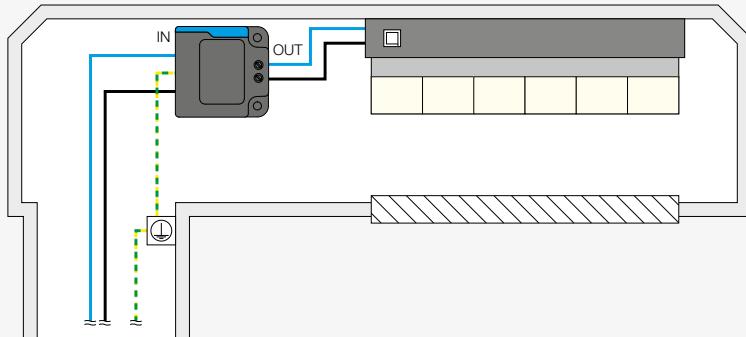


Fig. 03 Wiring of SPD: a) transit (priority of protection), b) parallel (priority of supply)

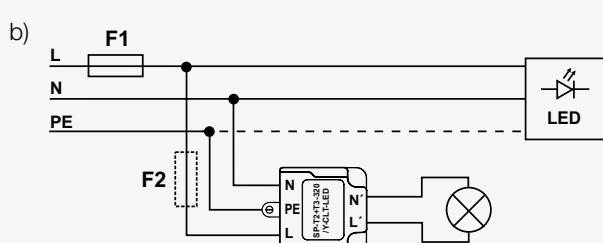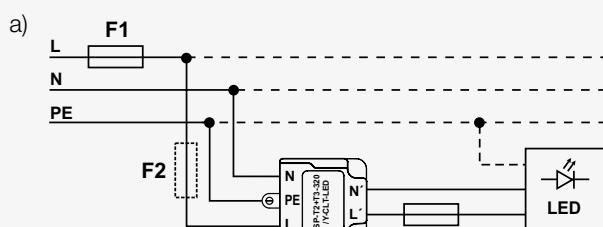


Overview SP-T2+T3-320/Y...-LED


SP-T2+T3-320/Y-CLT-LED
A06044

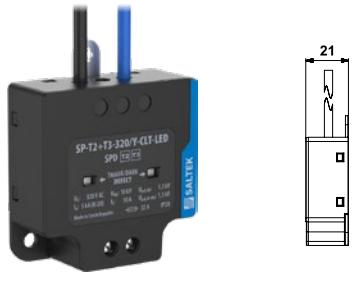


SP-T2+T3-320/Y-CLC-LED
A06246

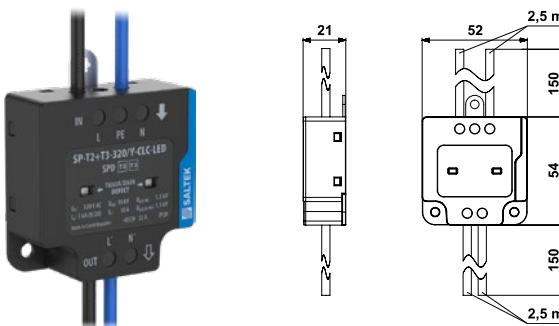


SP-T2+T3-320/Y-TLC-LED
A06247

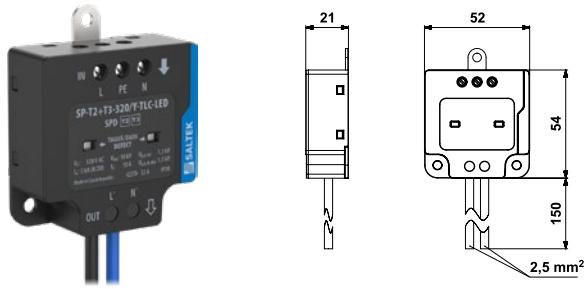


SP-T2+T3-320/Y-TLT-LED
A06244

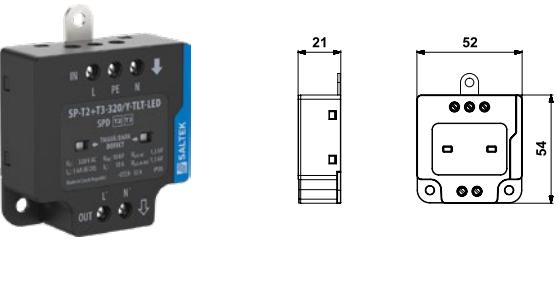


SP-T2+T3-320/Y-CCC-LED
A06245

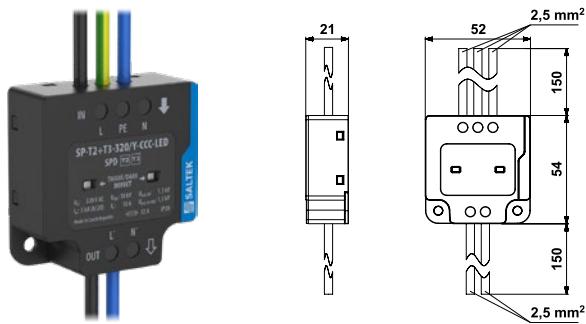


SP-T2+T3-320/Y-CCT-LED
A06243

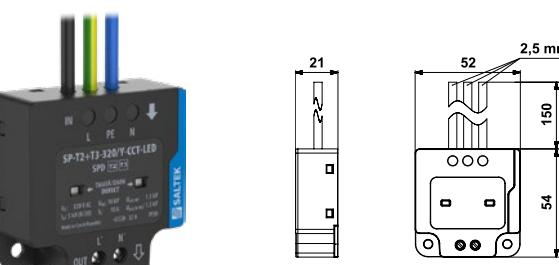

SP-T2+T3-320/Y-TTC-LED
A06248

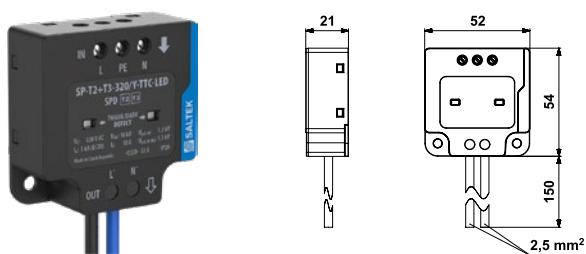

SP-T2+T3-320/Y-TTT-LED
A06222

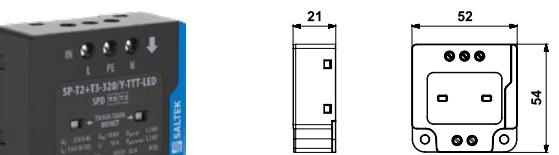

SP-T2+T3-320/Y.-L.-LED

SPD type 2 and type 3 – surge protective device for LED lights
fault signalling by supply interruption

- surge arrester especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with high exposure level (according to IEEE C62.41.2)

	Dimensions	Basic circuit diagram
See page 93.	See page 93.	<pre> graph LR L[N] --- R1[] R1 --- V1[MOV] V1 --- GND PE[PE] --- R2[] R2 --- V2[MOV] V2 --- GND NL[N] --- R3[] R3 --- V3[MOV] V3 --- GND </pre>

Parameter/Type	SP-T2+T3-320/Y-CLT-LED	SP-T2+T3-320/Y-CLC-LED	SP-T2+T3-320/Y-TLC-LED	SP-T2+T3-320/Y-TLT-LED
Nominal voltage U_n	230 V AC	230 V AC	230 V AC	230 V AC
Maximum operating voltage U_c	320 V AC	320 V AC	320 V AC	320 V AC
Nominal load current I_L	10 A	10 A	10 A	10 A
Nominal discharge current (8/20 µs) L-N I_n	5 kA	5 kA	5 kA	5 kA
Nominal discharge current (8/20 µs) N-PE I_n	5 kA	5 kA	5 kA	5 kA
Maximum discharge current (8/20 µs) L-N I_{max}	10 kA	10 kA	10 kA	10 kA
Maximum discharge current (8/20 µs) N-PE I_{max}	10 kA	10 kA	10 kA	10 kA
Test voltage L-N U_{oc}	10 kV	10 kV	10 kV	10 kV
Test voltage N-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Test voltage L-PE U_{oc}	10 kV	10 kV	10 kV	10 kV
Voltage protection level mode L-N U_p	1,3 kV	1,3 kV	1,3 kV	1,3 kV
Voltage protection level mode N-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE U_p	1,5 kV	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating I_{SCCR}	3 kA	3 kA	3 kA	3 kA
Maximum overcurrent protection	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N t_a	25 ns	25 ns	25 ns	25 ns
Response time N-PE t_a	100 ns	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 2,5 mm ²	-	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 1,5 mm ²	-	0,14 mm ² / 1,5 mm ²	0,14 mm ² / 1,5 mm ²
Fault indication	loss of voltage, dark grey indication field			
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T2,T3			
Ordering number	A06044	A06246	A06247	A06244

ezū

ezū


ezū

ezū

SP-T2+T3-320/Y...-LED

SPD type 2 and type 3 – surge protective device for LED lights
fault signalling by supply interruption

- surge arrester especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with high exposure level (according to IEEE C62.41.2)

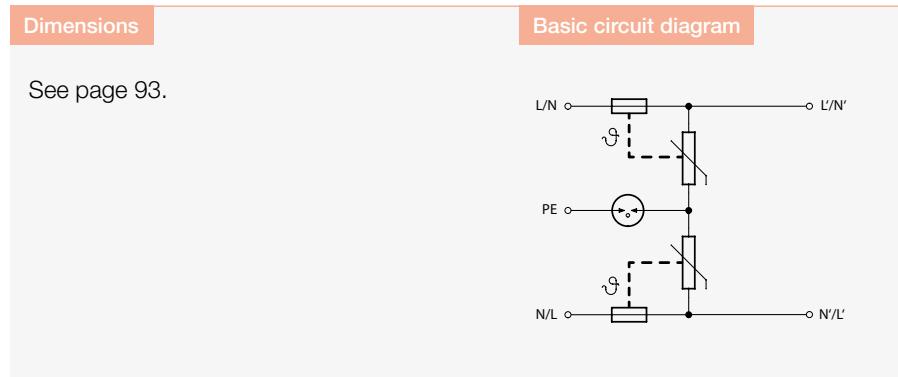

Parameter/Type	SP-T2+T3-320/Y-CCC-LED	SP-T2+T3-320/Y-CCT-LED	SP-T2+T3-320/Y-TTC-LED	SP-T2+T3-320/Y-TTT-LED
Nominal voltage	U_n	230 V AC	230 V AC	230 V AC
Maximum operating voltage	U_c	320 V AC	320 V AC	320 V AC
Nominal load current	I_L	10 A	10 A	10 A
Nominal discharge current (8/20 µs) L-N	I_n	5 kA	5 kA	5 kA
Nominal discharge current (8/20 µs) N-PE	I_n	5 kA	5 kA	5 kA
Maximum discharge current (8/20 µs) L-N	I_{max}	10 kA	10 kA	10 kA
Maximum discharge current (8/20 µs) N-PE	I_{max}	10 kA	10 kA	10 kA
Test voltage L-N	U_{oc}	10 kV	10 kV	10 kV
Test voltage N-PE	U_{oc}	10 kV	10 kV	10 kV
Test voltage L-PE	U_{oc}	10 kV	10 kV	10 kV
Voltage protection level mode L-N	U_p	1,3 kV	1,3 kV	1,3 kV
Voltage protection level mode N-PE	U_p	1,5 kV	1,5 kV	1,5 kV
Voltage protection level mode L-PE	U_p	1,5 kV	1,5 kV	1,5 kV
Short-circuit current rating	I_{SCCR}	3 kA	3 kA	3 kA
Maximum overcurrent protection		32 A gL/gG or C 32 A	32 A gL/gG or C 32 A	32 A gL/gG or C 32 A
Response time L-N	t_a	25 ns	25 ns	25 ns
Response time N-PE	t_a	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	-	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Cross-section of connected conductors stranded (min/max)	-	0,14 mm ² / 1,5 mm ²	0,14 mm ² / 1,5 mm ²	0,14 mm ² / 1,5 mm ²
Fault indication		loss of voltage, dark grey indication field		
Degree of protection		IP 20	IP 20	IP 20
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard		EN 61643-11:2012, IEC 61643-11:2011 / T2,T3		
Ordering number	A06245	A06243	A06248	A06222

ezū

ezū


ezū

ezū

DA-320-LED

SPD type 3 – surge protective device for LED lights
fault signalling by supply interruption

- surge protection especially for LED lights
- installation close to protected equipment in LV power circuits
- also for equipment in external part of building with low exposure level (according to IEEE C62.41.2)

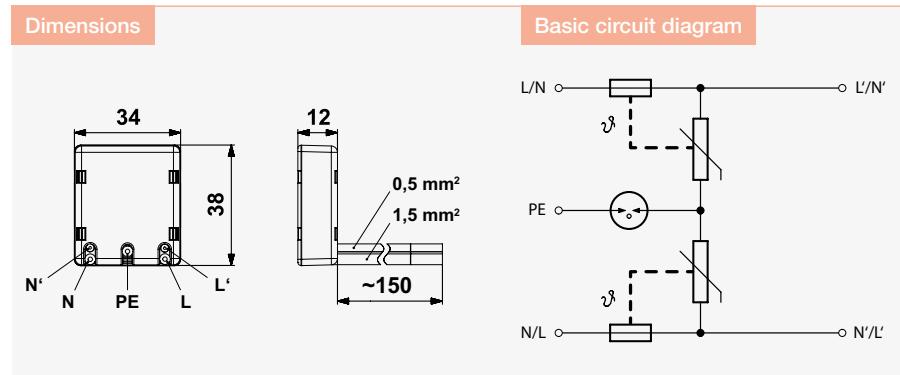

Parameter/Type	DA-320-LED
Nominal voltage	U _n 230 V AC
Maximum operating voltage	U _c 320 V AC
Nominal load current	I _L 5 A
Nominal discharge current (8/20 µs) L-N	I _n 3 kA
Nominal discharge current (8/20 µs) N-PE	I _n 3 kA
Nominal discharge current (8/20 µs) L+N-PE	I _n 5 kA
Test voltage L-N	U _{oc} 6 kV
Test voltage N-PE	U _{oc} 6 kV
Test voltage L+N-PE	U _{oc} 10 kV
Test voltage L-PE	U _{oc} 6 kV
Voltage protection level mode L-N	U _p 1.5 kV
Voltage protection level mode N-PE	U _p 1.5 kV
Voltage protection level mode L-PE	U _p 1.5 kV
Short-circuit current rating	I _{SCCR} 1.5 kA
Maximum overcurrent protection	B 16 A
Response time L-N	t _a 25 ns
Response time N-PE	t _a 100 ns
Fault indication	loss of voltage
Degree of protection	IP 20
Range of operating temperatures (min/max)	-20 °C / 70 °C
Mounting	installation box
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3
Ordering number	A06740

ezū

Surge Protective Devices for photovoltaic systems



Photovoltaic systems

Photovoltaics is one of the most and fastest growing renewable energy technologies. PV systems are often exposed to various environmental influences as they are installed in exposed locations such as on building roofs or open spaces. Components of unprotected PV systems can be damaged by direct and indirect lightning strikes.

- Protection of PV inverters for photovoltaic systems
- PV solution for family houses
- PV plants
- Protection of off-grid solar inverters
- Protection of battery charges

The damage caused by atmospheric discharges can be significant and also repetitive. This damage can lead to power interruptions (outages) which, together with the considerable repair costs, result in further financial losses. It is therefore necessary to install suitable surge protection devices in the PV systems.

- Lightning arrester SPD PV Type 1 and 2
- Surge arrester SPD PV Type 2

Protection of photovoltaic systems

Photovoltaic arrays are costly to install and demanding in terms of technology. Their service life must be measured in decades to see a return on the invested funds. Manufacturers usually provide about a twenty-year guarantee for photovoltaic systems.

To provide trouble-free technology throughout its service life, it is necessary to include comprehensive protection against atmospheric and induced overvoltage at the design stage to implement the technology into the project. Protection must be provided not only at the output side of the inverter, but also at the photovoltaic panels.

Solar photovoltaic arrays are usually installed on rooftops, or on a "greenfield".

As for the anticipated risks (pursuant to IEC (EN) 62305-2), direct or near lightning strikes are considered. Overtension or lightning strike can bring about financial loss, and for photovoltaic systems installed on rooftops where individuals could be working, injury should also be considered.

Photovoltaic system designs, including lightning and overvoltage suppression, shall comply with the IEC (HD) 60364-7-712 standard (Electrical installations of buildings – Solar photovoltaic (PV) systems), technical specification CLC/TS 50539-12 (SPD for specific application including DC – Selection and application principles – SPDs connected to PV installations) and standard IEC (EN) 62305 (Lightning protection).

The core (key device) of the whole photovoltaic system is the inverter, so the lightning and surge protection should be focused

on the inverter and, it should be incorporated into the whole lightning and surge protection system. Furthermore, photovoltaic units and their bearing metal structures should be integrated into the grounding design.

SPD selection for DC side:

- U_{CPV} maximum continuous operating voltage
 $U_{OC\ STC}$ standardized test circuit voltage of PV String

$$U_{CPV} \geq 1,2 \times U_{OC\ STC}$$

- If separating spark-over distance "s" is kept
 - SPD PV Type 2 is installed
 - If distance "l" between PV modules and inverter is longer than 10m - SPD is installed on both sides of the DC line
- If separating spark-over distance "s" is not kept
 - SPD PV Type 1 and Type 2 is installed
 - It is always necessary to install SPD PV on both sides of the DC line

General circuit diagram of solar photovoltaic systems

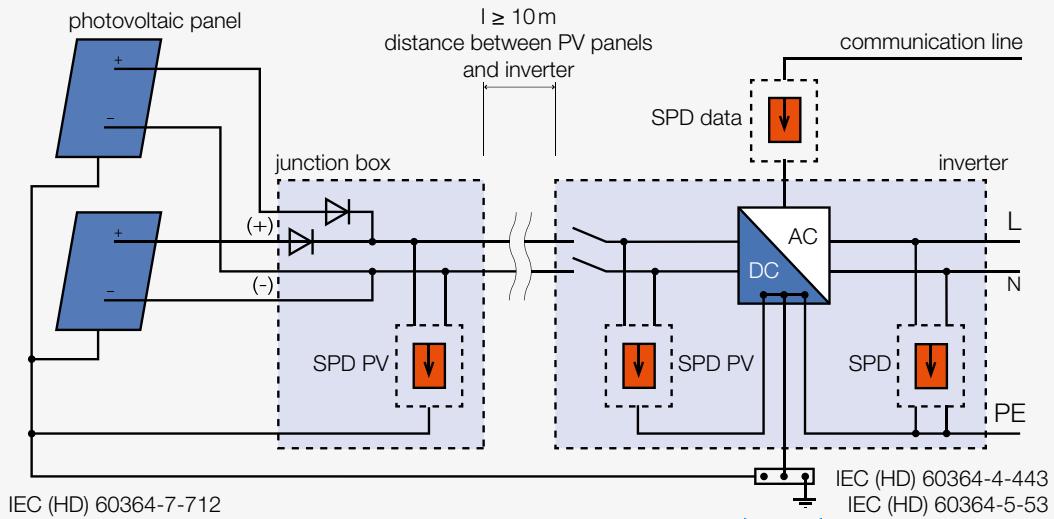


Fig. 1


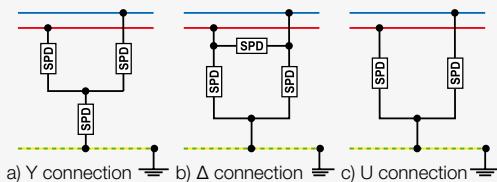


Fig. 2

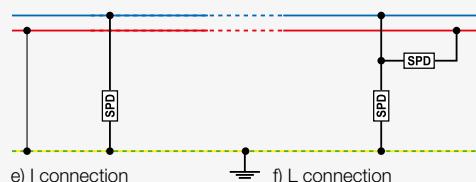

The DC side of the PV system can either be unearthed (insulated) or with one pole earthed. Figures 1 and 2 (see CLC/TS 50539-12) show how SPDs on the DC side must be connected.

When mounting an SPD, the necessary length of the connecting conductors should be complied with HD 60364-5-53 (IEC 60364-5-53, chapter 534.2.9).

LPL Maximum current of the corresponding device to LPL (10/350)	Number of leads	
	< 4	> 4
	Minimum values of impulse $I_{8/20}$ (8/20 us) and lightning $I_{10/350}$ (10/350 us) current for voltage limiting SPDs	
I or unknown	$I_{SPD1} = I_{SPD2}$ $I_{8/20} / I_{10/350}$	$I_{SPD3} = I_{SPD1} + I_{SPD2} =$ $I_{8/20} / I_{10/350}$
II	200 kA	17/10
III or IV	150 kA	34/20
	100 kA	10/5
		20/10
		12,5/7,5
		25/15
		7,5/3,75
		15/7,5
		8,5/5
		17/10
		5/2,5
		10/5


FLP-PV275 V/U

SPD PV type 1 and type 2 – lightning current and surge arresters for PV installation
pluggable module, visual fault signalling


- varistor lightning current arrester and surge arrester in "U" connection
- for protection of PV systems on the roofs, where the separating spark-over distance is not kept (connection to LPS)
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- Primarily intended for off-grid systems designed for operation with smaller devices up to 230 V, e.g. for heating, water heating, garden irrigation, etc.



Dimensions

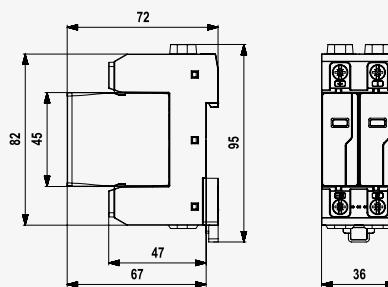

Basic circuit diagram



Parameter / Type	FLP-PV275 V/U
Total discharge current (10/350 µs) I_{Total}	280 V DC
Total discharge current (8/20 µs) I_{Total}	25 kA
Maximum discharge current (8/20 µs) I_{Total}	120 kA
Nominal discharge current (8/20 µs) I_{max}	60 kA
Voltage protection level mode +/- I_n	30 kA
Voltage protection level mode +/PE, -/PE U_p	2,5 kV
Short-circuit current rating U_p	1,3 kV
Response time t_{SCPV}	10 kA DC
Residual current mode +/PE, -/PE t_a	25 ns
Residual current mode +/PE, -/PE I_{PE}	20 µA DC
Reziduální proud mód +/PE, -/PE I_{PE}	500 µA AC
Cross-section of connected conductors solid (min/max)	1 mm² / 35 mm²
Cross-section of connected conductors stranded (min/max)	1 mm² / 25 mm²
Fault indication	red indication field
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-31, IEC 61643-31
Ordering number	A07407


ezú

Spare module	FLP-PV275U V/0
Ordering number	A06147

FLP-PV550 V/U (S)

SPD PV type 1 and type 2 – lightning current and surge arresters for PV installation
pluggable module, visual fault signalling, module locking

- varistor lightning current arrester and surge arrester in "U" connection
- for protection of PV systems on the roofs, where the separating spark-over distance is not kept (connection to LPS)
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

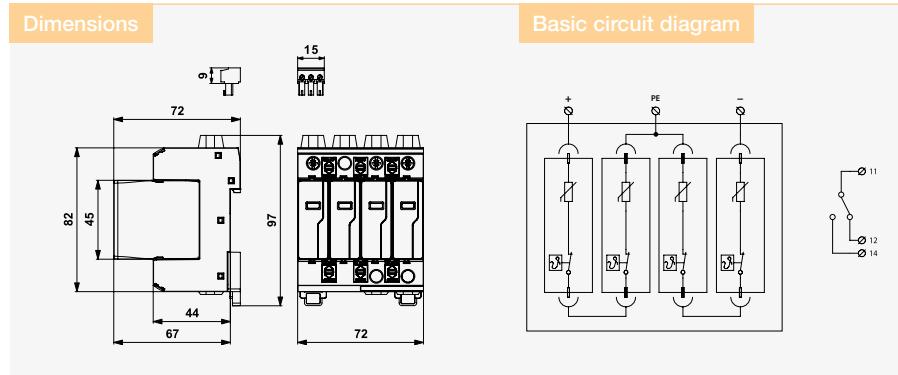


Parameter/Type	FLP-PV550 V/U	FLP-PV550 V/U S
Maximum operating voltage mode +/-, +/PE, -/PE	U_{CPV}	560 V DC
Total discharge current (10/350 µs)	I_{Total}	25 kA
Total discharge current (8/20 µs)	I_{total}	120 kA
Maximum discharge current (8/20 µs)	I_{max}	60 kA
Nominal discharge current (8/20 µs)	I_n	30 kA
Voltage protection level mode +/-	U_p	4,8 kV
Voltage protection level mode +/PE, -/PE	U_p	2,4 kV
Short-circuit current rating	I_{SCPV}	10 kA DC
Response time	t_a	25 ns
Residual current mode +/PE, -/PE	I_{PE}	10 µA DC
Residual current mode +/PE, -/PE	I_{PE}	500 µA AC
Cross-section of connected conductors solid (min/max)		1 mm ² / 35 mm ²
Cross-section of connected conductors stranded (min/max)		1 mm ² / 25 mm ²
Fault indication	red indication field	red indication field
Remote indication	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31
Ordering number	A06145	A06146

Spare module	FLP-PV275U V/0	FLP-PV275U V/0
Ordering number	A06147	A06147

FLP-PV.../Y(S)

SPD PV T1+T2 – varistor arrester of lightning currents and overvoltage for PV applications
visual fault signaling

- varistor arrester of lightning currents and overvoltage in "Y" connection
- optimized PV solution, for the protection of the PV systems, where the separation distance is not maintained (connected to LPS)
- selection of the maximum operating voltage of SPD: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signaling (S)

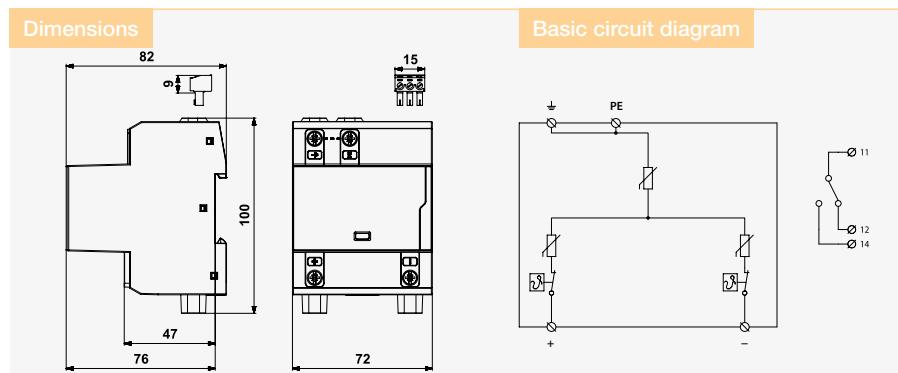

Parameter/Type	FLP-PV1000/Y	FLP-PV1000/YS	FLP-PV1500/Y	FLP-PV1500/YS
Maximum operating voltage mode +/-, +/PE, -/PE	U_{CPV} 1 050 V DC	U_{CPV} 1 050 V DC	U_{CPV} 1 500 V DC	U_{CPV} 1 500 V DC
Total discharge current (10/350 µs)	I_{Total} 12,5 kA	I_{Total} 12,5 kA	I_{Total} 12,5 kA	I_{Total} 12,5 kA
Total discharge current (8/20 µs)	I_{total} 80 kA	I_{total} 80 kA	I_{total} 80 kA	I_{total} 80 kA
Maximum discharge current (8/20 µs)	I_{max} 40 kA	I_{max} 40 kA	I_{max} 40 kA	I_{max} 40 kA
Nominal discharge current (8/20 µs)	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA
Voltage protection level mode +/-	U_p 3,8 kV	U_p 3,8 kV	U_p 5,4 kV	U_p 5,4 kV
Voltage protection level mode +/PE, -/PE	U_p 3,8 kV	U_p 3,8 kV	U_p 5,4 kV	U_p 5,4 kV
Short-circuit current rating	I_{SCPV} 20 kA DC	I_{SCPV} 20 kA DC	I_{SCPV} 20 kA DC	I_{SCPV} 20 kA DC
Response time	t_a 25 ns	t_a 25 ns	t_a 25 ns	t_a 25 ns
Residual current mode +/PE, -/PE	I_{PE} 10 µA DC	I_{PE} 10 µA DC	I_{PE} 10 µA DC	I_{PE} 10 µA DC
Residual current mode +/PE, -/PE	I_{PE} 500 µA AC	I_{PE} 500 µA AC	I_{PE} 500 µA AC	I_{PE} 500 µA AC
Cross-section of connected conductors solid (min/max)	4 mm ² / 35 mm ²			
Cross-section of connected conductors stranded (min/max)	4 mm ² / 25 mm ²			
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C			
Mounting	DIN rail 35 mm			
According to standard	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31	EN 61643-31, IEC 61643-31
Ordering number	A04201	A04198	A04200	A04197

ezú VDE

ezú VDE


ezú VDE

ezú VDE

SLP-PV... V/U (S)

SPD PV type 2 – surge arrester for PV installation
pluggable module, visual fault signalling, module locking

- varistor surge arrester in "U" connection
- for protection of PV systems where the separating spark-over distance is kept or without LPS
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

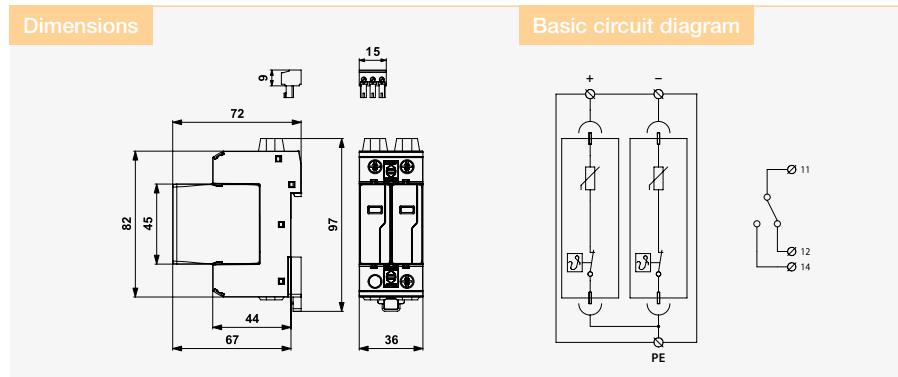

Parameter/Type	SLP-PV170 V/U	SLP-PV170 V/U S	SLP-PV500 V/U	SLP-PV500 V/U S
Maximum operating voltage mode +/-, +/PE, -/PE	U_{CPV} 170 V DC	170 V DC	510 V DC	510 V DC
Total discharge current (8/20 µs)	I_{Total} 80 kA	80 kA	80 kA	80 kA
Maximum discharge current (8/20 µs)	I_{max} 40 kA	40 kA	40 kA	40 kA
Nominal discharge current (8/20 µs)	I_n 15 kA	15 kA	15 kA	15 kA
Voltage protection level mode +/-	U_p 1,2 kV	1,2 kV	4 kV	4 kV
Voltage protection level mode +/PE, -/PE	U_p 0,6 kV	0,6 kV	2 kV	2 kV
Short-circuit current rating	I_{SCPV} 10 kA DC	10 kA DC	10 kA DC	10 kA DC
Response time	t_a 25 ns	25 ns	25 ns	25 ns
Residual current mode +/PE, -/PE	5 µA DC	5 µA DC	5 µA DC	5 µA DC
Residual current mode +/PE, -/PE	280 µA AC	280 µA AC	190 µA AC	190 µA AC
Cross-section of connected conductors solid (min/max)	1 mm² / 35 mm²	1 mm² / 35 mm²	1 mm² / 35 mm²	1 mm² / 35 mm²
Cross-section of connected conductors stranded (min/max)	1 mm² / 25 mm²	1 mm² / 25 mm²	1 mm² / 25 mm²	1 mm² / 25 mm²
Fault indication	red indication field	red indication field	red indication field	red indication field
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm²	-	1,5 mm²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-31, IEC 61643-31			
Ordering number	A03662	A03663	A03664	A03665

ezÚ


ezÚ

Spare module	SLP-PV170U V/0	SLP-PV170U V/0	SLP-PV500U V/0	SLP-PV500U V/0
Ordering number	A03692	A03692	A03694	A03694

SLP-PV... V/Y (S)

SPD PV type 2 – surge arrester for PV installation
pluggable module, visual fault signalling

- varistor surge arrester in "Y" connection
- for protection of PV systems where the separating spark-over distance is kept or without LPS
- maximum continuous operating voltage for PV application: $U_{CPV} \geq 1,2 \times U_{OC\ STC}$
- optional remote fault signalling (S)

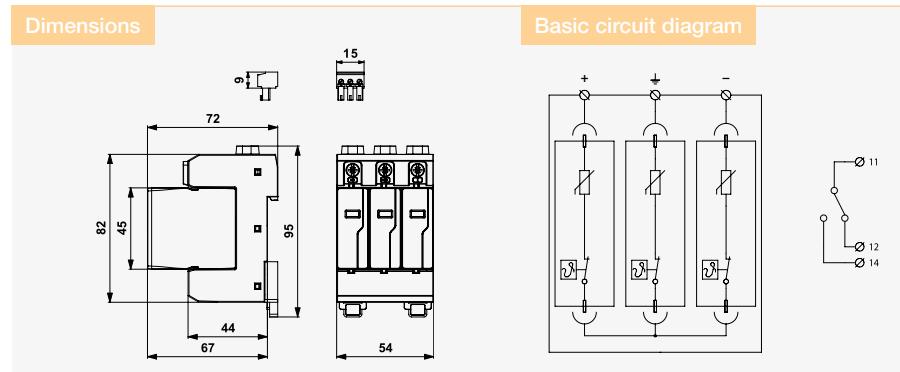

Parameter/Type	SLP-PV700 V/Y	SLP-PV700 V/Y S	SLP-PV1000 V/Y	SLP-PV1000 V/Y S	SLP-PV1500 V/Y	SLP-PV1500 V/Y S
Maximum operating voltage mode +/-, +/PE, -/PE	U_{CPV}	750 V DC	750 V DC	1 020 V DC	1 020 V DC	1 500 V DC
Total discharge current (8/20 μ s)	I_{Total}	40 kA				
Maximum discharge current (8/20 μ s)	I_{max}	40 kA				
Nominal discharge current (8/20 μ s)	I_n	20 kA	20 kA	15 kA	15 kA	15 kA
Voltage protection level mode +/–	U_p	3,6 kV	3,6 kV	4 kV	4 kV	6,4 kV
Voltage protection level mode +/PE, -/PE	U_p	3,6 kV	3,6 kV	4 kV	4 kV	6,4 kV
Short-circuit current rating	I_{SCPV}	10 kA DC				
Response time	t_a	25 ns				
Residual current mode +/PE, -/PE	I_{PE}	5 μ A DC				
Residual current mode +/PE, -/PE	I_{PE}	250 μ A AC				
Cross-section of connected conductors solid (min/max)		4 mm ² / 35 mm ²				
Cross-section of connected conductors stranded (min/max)		4 mm ² / 25 mm ²				
Fault indication		red indication field				
Remote indication	-	potential-free change-over contact	-	potential-free change-over contact	-	potential-free change-over contact
Remote indication contacts	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC	-	250 V / 0,5 A AC, 250 V / 0,1 A DC
Cross-section of remote indication conductors	-	1,5 mm ²	-	1,5 mm ²	-	1,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard				EN 61643-31, IEC 61643-31		
Ordering number	A04300	A04301	A04302	A04303	A04304	A04305

ezü

ezü

ezü

VDE

ezü

VDE

ezü

VDE

ezü

VDE

Spare module	SLP-PV350Y V/0	SLP-PV350Y V/0	SLP-PV500Y V/0	SLP-PV500Y V/0	SLP-PV750Y V/0	SLP-PV750Y V/0
Ordering number	A04306	A04306	A04307	A04307	A04308	A04308


FLP-PV... V/0, SLP-PV... V/0

Replacement modules of SPD for PV



Photovoltaic systems



Dimensions

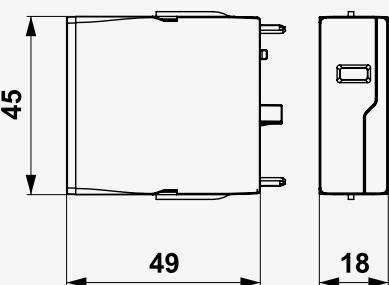


Basic circuit diagram



Type	Ordering number
FLP-PV275U V/0	A06147
SLP-PV170U V/0	A03692
SLP-PV500U V/0	A03694
SLP-PV350Y V/0	A04306
SLP-PV500Y V/0	A04307
SLP-PV750Y V/0	A04308

SPDs for data / signalling / telecommunication networks

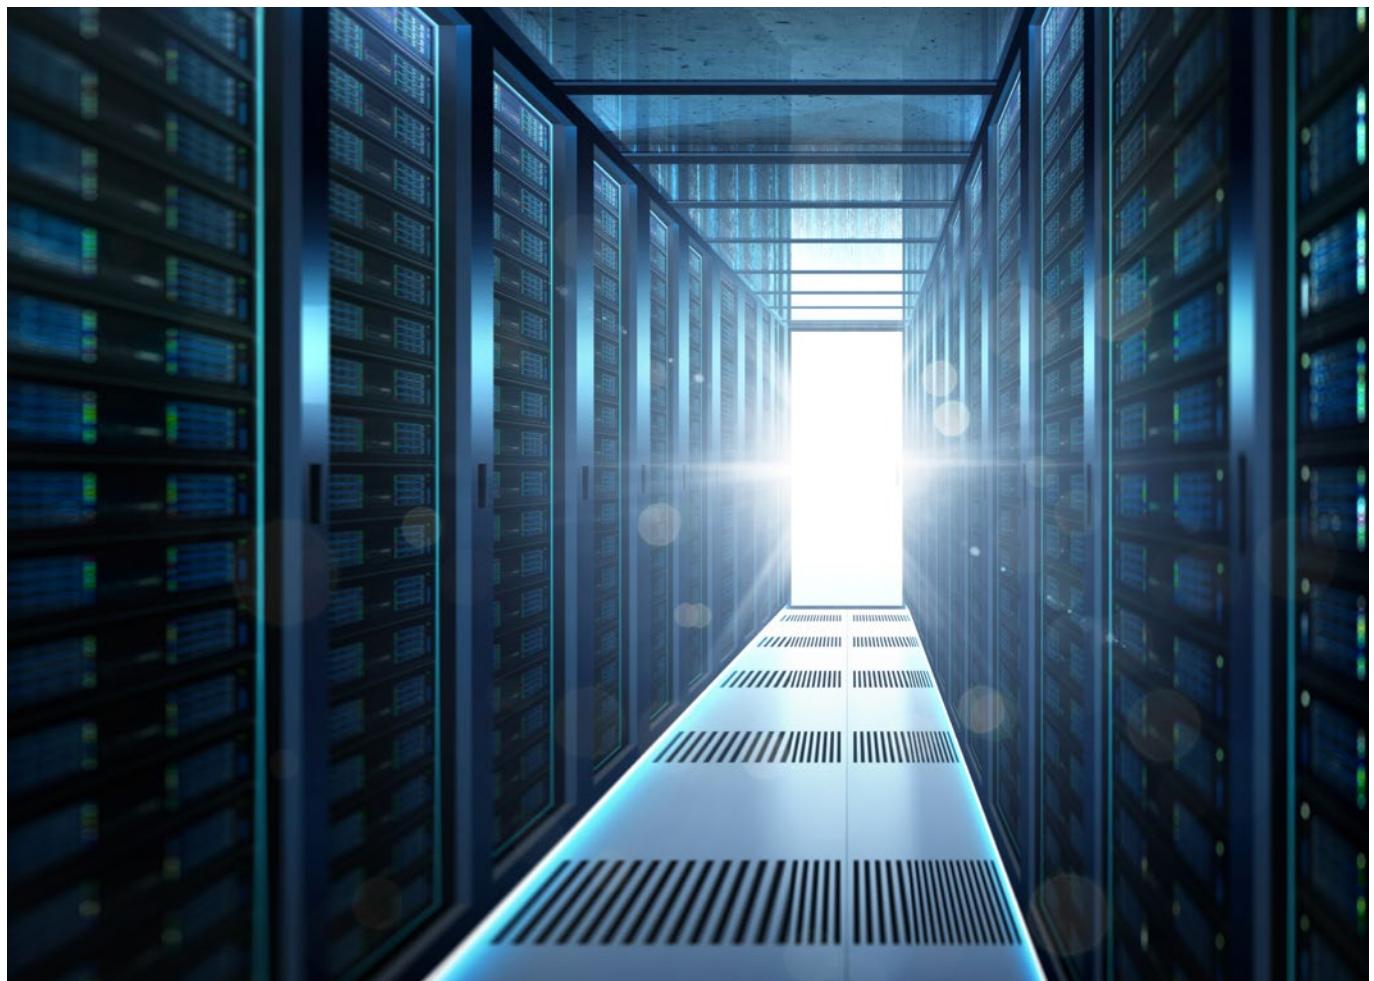

The main principle in surge protection is, among other things, the comprehensiveness of protection. It is not enough to protect only the power lines, but all inputs and outputs to the building - including data, signal and telecommunication lines that can become conductive paths

for surges. Data, signal and telecommunication lines often provide critical infrastructure that in most cases is absolutely essential for ensuring the activities in the companies. Therefore, their reliability and uptime is crucial.

- Security, Fire Alarm and CCTV systems
- IP technology and data networks (Ethernet)
- ADSL and telecommunications
- Antennas
- Attendance systems
- Control systems for industry
- Lightning Current Arresters ST 1, ST 1+2+3
- Surge Arresters ST 2+3, ST 3

Data, signal and telecommunication protections

The basic principle for surge protection is the **complexity** and **coordination** of devices. The complexity requirement can be met only by installing surge arresters at all inputs and outputs (!) of the given equipment, i.e. it is necessary to protect the power supply line and also the measuring and communication interface. We can ensure coordination by installing devices with various protective effects in sequence into the line or the communication core and the interface.

Criteria to meet the requirement for complexity and coordination particularly include position of installation respective to LPZ boundary, maximum impulse or discharge current, required protection level and response time.

Fig. 1 shows the principle of protection coordination and protection complexity.

In order to select the correct type of dataline protection there must be detailed information about the protected signal:

- Signal peak voltage
- Signal current
- Frequency bandwidth – frequency and signal form
- Conduit in lightning protection zones (LPZ 0 to LPZ 2)
- Longitudinal impedance – maximum line attenuation
- Possibility of steady overvoltage (so-called high-ohm fault)

During the installation of all surge devices, strictly observe the elimination of the coupling between the input of the unprotected line and the output of the protected line and the earthing line. Examples of the most frequent installation errors concerning the coupling between the input and output of the protected line and earth are shown in Fig. 2. This figure also shows an example of correct wiring.

Potential balancing of pulse overvoltage must always proceed outside the protected equipment. Fig. 3 shows the correct wiring of surge arresters in a control system with external power source, communicating with the surroundings via a measuring and communication interface. Potential balancing via the protected equipment is inadmissible.

The table with principle of marking for easier orientation:

Transition from zones	Marking
LPZ 0 – LPZ 1	ST 1
LPZ 1 – LPZ 2	ST 2
LPZ 2 – LPZ 3	ST 3

Example of marking:

Product	Description	Marking
BD-250-T	lightning current arrester	ST 1
BDG-024-V/1-FR1	combined lightning and surge currents arrester	ST 1+2+3
DM-024/1 R DJ	combined surge protection	ST 2+3

Fig. 1 Principle of protection coordination and protection complexity

FLP – lightning current arrester class B
SLP – surge arrester class C
DA – surge protection class D
BD-T – lightning current arrester
DM – combined surge protection
MaR – measurement and control room

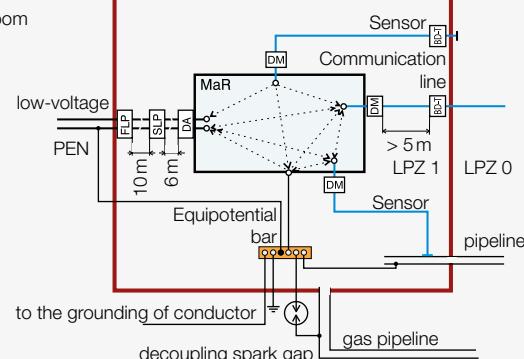


Fig. 2 Coupling between input and output line and earth connection

An unprotected input line should be removed from the protected output line as far as possible


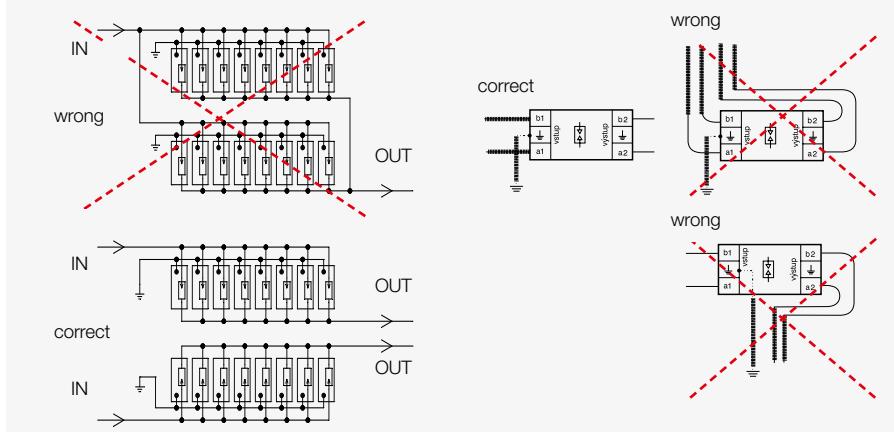


Fig. 3 Principle of the protection of control systems

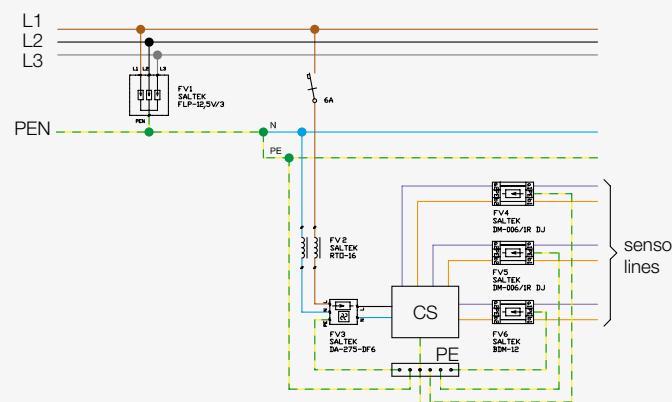

The principle of placing the dataline protections

For easier placing of dataline protections SALTEK introduced a new type of categorization of dataline protections under SALTEK marking ST 1, ST 2 and ST 3. This new designation quite specifically define the placing of dataline protections within the principles of Zonal protection and complies with standards IEC (EN) 61643-21 + A1, A2 and IEC (EN) 62305 - Zonal protection.

Another important thing to note is the fact that the majority of dataline protection is multi-type. The most commonly used protection is two-type, composed of second and third type (ST 2+3). This includes units of the DM line intended to protect communication lines which are inside the building.

For communication lines that go to the outside of the building (i.e. between LPZ 0 to LPZ 1), a combination of devices can be used, i.e. protection DM series (ST 2+3) and lightning current arrester BD type (ST 1) or three-type protection BDM series or BDG (ST 1+2+3). On the Fig. 4 it is clearly shown which variant for which case is suitable.

Given that most of the dataline protection is a multi-type, it must be remembered that these are directional and must be fitted in the correct manor (installed in the correct direction). The communication line (wire) is connected to the input of dataline device and the output of dataline device is connected to the protected equipment as shown in Fig. 5. For comprehensive protection of communication and instrumentation systems, it is necessary that as well as protecting the measuring and datalines, the power supply line must be also protected. Protection of the AC power supply 230 V AC is shown in Fig. 3 (the principle of the protection of control system). When protecting small voltages, the DP units are used. These are adapted for protection of both AC and DC voltage. The signal lines often use shielded cables. The principle of grounding of shielding is shown in Fig. 6 (grounding of shielding).

Maintenance of protective devices

Surge protective devices from SALTEK do not require maintenance during its lifetime. But it is appropriate to provide periodic inspection during the operation and remedy when any problem occurs. The damage of the dataline protection cause the interruption and/or permanent short circuit of the line.

Fig. 4 Coordination distance

An example where coordination distance of 5 m cannot be kept (combined coarse and fine protection, device BDM)

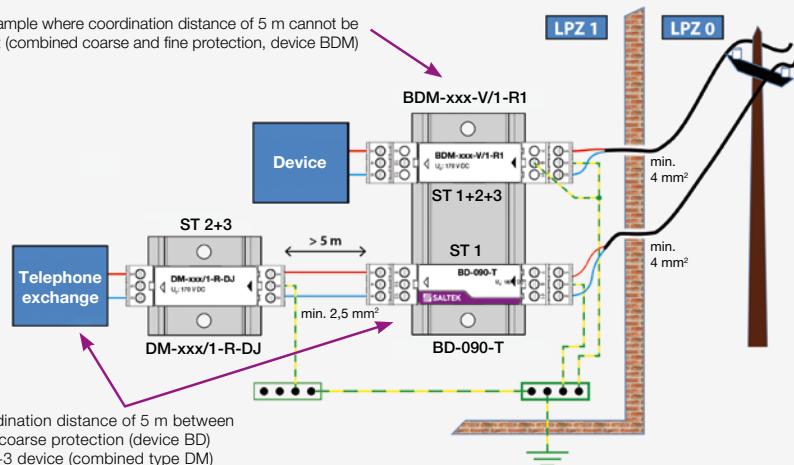


Fig. 5 Protection of electronic security system


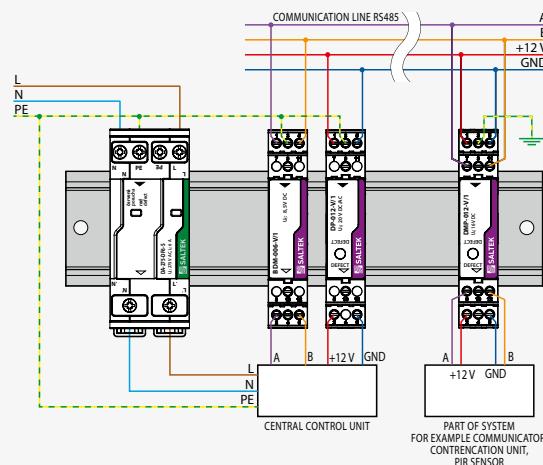


Fig. 6 Grounding of the shielding

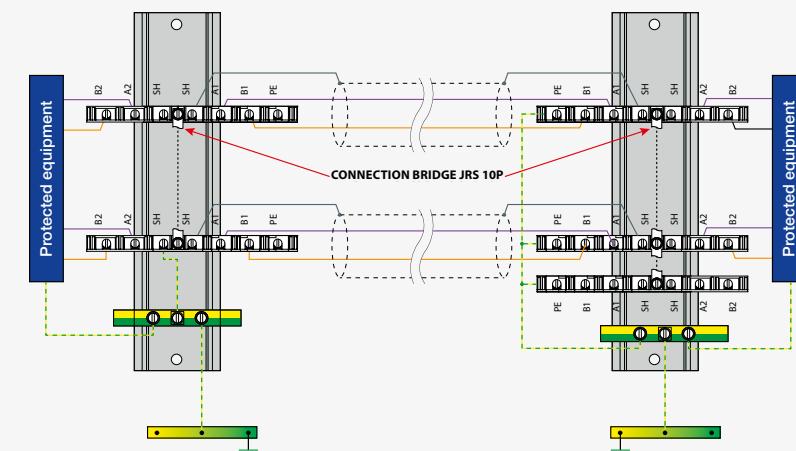

SALTEK® SPD applications in data /signalling / telecommunication systems

MEASURING AND CONTROL TECHNOLOGY AND BUS SYSTEMS								
Interface/Signal	Protected lines	U (DC) [V]	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes	
			10/350 µs	8/20 µs				
Current loop 0 ÷ 20 mA, 4 ÷ 20 mA (also with HART)	2	12/24	x	10 kA	DM-xx/1-R-DJ	DIN 35		
			x	5 kA	DM-xx/1-Ry*	DIN 35		
			2,5 kA	10 kA	BDM-xx-V/2-FR1	DIN 35		
	4		x	10 kA	2ks DM-xx/1-R-DJ	DIN 35		
			x	5 kA	DMG-xx/1-Ry*	DIN 35		
			2,5 kA	10 kA	BDG-xx-V/1-FR1	DIN 35		
Binary signals	2	24	x	5 kA	DMLF-024/1-Ry*	DIN 35		
			2,5 kA	10 kA	BDM-xx-V/1-FR1	DIN 35		
BLN Building Level Network	2	15/48	x	10 kA	BDM-xx-V/1-FR1	DIN 35		
			x	10 kA	DM-xx/1-R-DJ	DIN 35		
TTL	2	5	x	10 kA	DM-012/1-R-DJ	DIN 35		
			2,5 kA	10 kA	BDM-012-V/1-FR1	DIN 35		
RS-485 up to 1,5 Mbit/s	2	5	x	10 kA	DM-006/1-R-DJ	DIN 35		
			2,5 kA	10 kA	BDM-006/V/1-FR1	DIN 35		
			x	10 kA	DM-006/1-Ry*	DIN 35		
	3	5	x	10 kA	DM-006/1 3R DJ	DIN 35		
			2,5 kA	10 kA	BDG-006/V/1-4FR1	DIN 35		
			x	10 kA	DM-006/1 4R DJ	DIN 35		
RS 485 combined with power line (e.g. security and fire alarm system)	2	12	x	10 kA	DMP-012-V/1-FR1	DIN 35		
			x	10 kA	DMP-024-V/1-FR1	DIN 35		
	2	24	x	10 kA	BDM-006/V/1-FR1	DIN 35		
			x	10 kA	DM-006/1-R-DJ	DIN 35		
RS-422	2	5	x	10 kA	DM-006/1-R-DJ	DIN 35		
			2,5 kA	10 kA	BDG-006/V/1-4FR1	DIN 35		
	4	5	x	10 kA	DM-006/1 4R DJ	DIN 35		
			2,5 kA	10 kA	DM-012/1-R-DJ	DIN 35		
Analog signals	I = 0,5 A	2	6 ÷ 48	x	10 kA	DM-xx/1-R-DJ	DIN 35	
			6 ÷ 110	x	5 kA	DM-xx/1-Ry*	DIN 35	
			6 ÷ 110	x	5 kA	DMG-xx/1-Ry*	DIN 35	
		24	x	5 kA	DMLF-024/1-Ry*	DIN 35		
			2,5 kA	10 kA	BDM-xx-V/1-FR1	DIN 35		
			2,5 kA	10 kA	BDG-xx-V/1-FR1	DIN 35		
	I = 1 A	2	6 ÷ 230	x	10 kA	DM-xx/1-L2-DJ	DIN 35	
			2,5 kA	10 kA	BDM-xx-V/1-FR2	DIN 35		
		2	6 ÷ 48	x	10 kA	BDG-xx-V/1-FR2	DIN 35	
			2,5 kA	10 kA	DM-024/1-R-DJ	DIN 35		
I = 2 A		2	6 ÷ 60	x	10 kA	BDM-xx-V/1-FR2	DIN 35	
			2,5 kA	10 kA	BDG-xx-V/1-FR2	DIN 35		
Multipurpose coarse protection	2	70	2,5 kA	x	BD-090-T/V/2-F16	DIN 35		
RS-232-C	2	15	2,5 kA	10 kA	BDM-024-V/1-FR1	DIN 35		
Measurement of temperature	2	do 6	x	10 kA	DM-024/1-R-DJ	DIN 35		
			2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35		
			x	10 kA	DM-006/1-R-DJ	DIN 35		
Pt-100, Pt-1000 Ni-1000, NTC, PTC	3	do 6	x	10 kA	DM-006/1 3R DJ	DIN 35		
Optron protocol	3/4	do 6	2,5 kA	10 kA	BDG-006/V/1-4FR1	DIN 35		
			x	10 kA	DM-006/1 4R DJ	DIN 35		
			2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35		
Optron protocol	2	6 ÷ 24	x	10 kA	DM-xx/1-R-DJ	DIN 35		

* Ry means version of the terminal block: RS - screw terminals, RB - screwless terminals

MEASURING AND CONTROL TECHNOLOGY AND BUS SYSTEMS							
Interface/Signal	Protected lines	U (DC) [V]	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes
			10/350 µs	8/20 µs			
DC power supply	I = 16 A	2	12 ÷ 48	x 2 kA	DP-xx	DIN 35	
				x 2 kA	DP-xx-V/1-16	DIN 35	
				x 2 kA	DP-xx-V/1-F16	DIN 35	
		12 ÷ 60		x 2 kA	DPF-xxxDC-16-S	DIN 35	RFI filter
KNX TP (EIB)	2	24	2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
M-Bus (Meter Bus)	2	48	2,5 kA	10 kA	BDM-048-V/1-FR1	DIN 35	
CAN-Bus communication max. 1,5 Mbit/s	2	6	x	10 kA	DM-006/V-1-R-DJ	DIN 35	
	2	6	2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35	
Device Net communication 500 kbit/s	I = 2 A	2	24	2,5 kA	10 kA	BDM-024-V/1-FR2	DIN 35
			x	10 kA	DM-024/1-L2-DJ	DIN 35	
	I = 2 A	2	5	2,5 kA	10 kA	BDM-006-V/1-FR2	DIN 35
			x	10 kA	DM-012/1-L2-DJ	DIN 35	
I = 1 A	I = 1 A	2	24	2,5 kA	10 kA	BDM-024-V/1-FR1	DIN 35
				2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35
			5				
C-Bus	2	5	x	10 kA	DM-006/V-1-R-DJ	DIN 35	
Honeywell communication max. 0,9 Mbit/s	2	5	2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35	
Dupline	2	15	2,5 kA	10 kA	BDG-012-V/1-FR1	DIN 35	
E-Bus (Honeywel)	2	48	2,5 kA	10 kA	BDG-048-V/1-FR1	DIN 35	
Fieldbus Foundation	2	30	2,5 kA	10 kA	BDG-048-V/1-FR1	DIN 35	
Genius I/O Bus	2	12	2,5 kA	10 kA	BDG-012-V/1-FR1	DIN 35	
FIPIO/FIPWAY	2	30	2,5 kA	10 kA	BDG-048-V/1-FR1	DIN 35	
INTERBUS INLINE	2	48	2,5 kA	10 kA	BDG-048-V/1-FR1	DIN 35	
K-Bus	2	24	2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
LUXMATE-Bus	2	24	2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
Procontic CS31 (RS-232)	2	15	2,5 kA	10 kA	BDM-024-V/1-FR1	DIN 35	
Profibus-DP/FMS high-speed lines	up to 1,5 Mbit/s	2	9	x	10 kA	DM-006/V-1-R-DJ	DIN 35
		2	6	2,5 kA	10 kA	BDM-006-V/1-FR1	DIN 35
		9	18	x	150 A	DL-RS DD9	D-SUB 9
	up to 20 Mbit/s	2	6/15	x	5 kA	DMHF-xx/1-Ry*	DIN 35
		3/4	6/24	2,5 kA	10 kA	BDMHF-xx-V/1-4FR1	DIN 35
		2	6/24	2,5 kA	10 kA	BDMHF-xx-V/1-FR1	DIN 35
		2	6 ÷ 24	2,5 kA	10 kA	BDGHF-xx-V/1-FR1	DIN 35
R-Bus		2+2	6 ÷ 24	2,5 kA	10 kA	BDGHF-xx-V/2-FR1	DIN 35
Securilan-LON-Bus	2	6	2,5 kA	10 kA	BDG-006-V/1-FR1	DIN 35	
SIGMA SYS (Siemens EPS)	2	48	2,5 kA	10 kA	BDG-048-V/1-FR1	DIN 35	
SS97 SINIS (RS-232)	2	15	2,5 kA	10 kA	BDM-024-V/1-FR1	DIN 35	
SUCONET	2	6	2,5 kA	10 kA	BDG-006-V/1-FR1	DIN 35	
TELEPERM M analog input	2	12	2,5 kA	10 kA	BDM-012-V/1-FR1	DIN 35	
TELEPERM M binary I/O	2	24	2,5 kA	10 kA	BDM-024-V/1-FR1	DIN 35	
TELEPERM M binary I/O	2	48	2,5 kA	10 kA	BDM-048-V/1-FR1	DIN 35	
TELEPERM MFM100	2	12	2,5 kA	10 kA	BDG-012-V/1-FR1	DIN 35	
TTY		2	6 ÷ 24	x	10 kA	DM-xxx/V-1-R-DJ	DIN 35
		2	6 ÷ 24	2,5 kA	10 kA	BDM-xxx-V/1-FR1	DIN 35
Potential-free (isolated) contacts	1	6 ÷ 110	x	10 kA	DMJ-xx/2-Ry*	DIN 35	
			2,5 kA	10 kA	BDM-xx-V/2-JFR1	DIN 35	
			2,5 kA	10 kA	BDM-xx-V/2-JFR2	DIN 35	
			2,5 kA	10 kA	BDM-xx-V/4-JFR1	DIN 35	
			2,5 kA	10 kA	BDM-xx-V/4-JFR1	DIN 35	
Protection against power crossing of lines up to 400 V	2	24/48	x	5 kA	DMS-xx	DIN 35	

SALTEK® SPD applications in data /signalling / telecommunication systems

TELECOMMUNICATIONS, TELEPHONE SYSTEMS							
Interface/Signal	Protected lines	U (DC) (V)	Discharge current per core		SPD xx – corresponding voltage	Mounting	Notes
			10/350 µs	8/20 µs			
ADSL analog line	2	170	2,5 kA	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDG-230-V/1-FR	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
Analog telephone line	2	170	2,5 kA	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDG-230-V/1-FR	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
DATEX-P	2	24	x	5 kA	DMG-024/1-Ry*	DIN 35	
			2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
ISDN U _{k0}	2	120	x	2,5 kA	DL-ISDN RJ45	DIN 35	
			x	5 kA	DMG-024/1R-Ry*	DIN 35	
Modem M1	2	15	2,5 kA	10 kA	BDG-024-V/1-FR1	DIN 35	
			2,5 kA	10 kA	BDM-24-V/1-FR1	DIN 35	
Telephony systems (eg. Siemens, HICOM, ALCATEL)	2	170	2,5 kA	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	x	BD-250-T-V/2-16	DIN 35	
T-DSL	2	170	2,5 kA	2,5 kA	DL-TLF-UHF	DIN 35	
			2,5 kA	10 kA	BDGHF-230-V/1-FR	DIN 35	
			2,5 kA	10 kA	BDGHF-230-V/2-FR	DIN 35	
Multipurpose coarse protection	2	180	2,5 kA	x	BD-250-T-V/2-16	DIN 35	
			2,5 kA	x	BD-250-T-V/2-F16	DIN 35	
			x	BD-090-T-V/2-16	DIN 35		
			x	BD-090-T-V/2-F16	DIN 35		
			2,5 kA	x	BD-250-T	DIN 35	
VDSL	2	70	2,5 kA	x	BD-090-T	DIN 35	
			2,5 kA	2,5 kA	DL-TLF-UHF	DIN 35	
VDSL2, VDSL3	2	60	2,5 kA	2,5 kA	DL-VDSL3	DIN 35	


* Ry means version of the terminal: RS - screw, RB - screwless

ETHERNET AND GENERAL STRUCTURED CABLING								
Application	Protected pairs	Max. bitrate	Impulse current per core [A]		PoE compatibility (IEEE802.3)	SPD type	Mounting	LPZ location
			10/350 µs	8/20 µs				
Gigabit Ethernet (without PoE)	4	10 Gbps	x	200	NE	DL-Cat.6A	DIN 35	LPZ 1 ->
	4	10 Gbps	x	200	NE	DL-Cat.6A-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-RJ45-PoE	DIN 35	LPZ 0 _B ->
Gigabit Ethernet with PoE	4	10 Gbps	250	150	af/at/bt	DL-10G-RJ45-PoE	DIN 35	LPZ 0 _B ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-POE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-POE-M	DL-PL-RACK-1U	LPZ 0 _B ->
Gigabit Ethernet PoE Injektor	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V	DIN 35	LPZ 1 ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-PoE-IP66	outdoor panel/pole	LPZ 0
General structured cabling (IP telephony, KNX, DMX, RS-485,...)	4	1 Gbps	250	150	af/at	DL-1G-POE-INJECTOR	DIN 35	LPZ 0 _B ->
	4	1 Gbps	250	150	af/at	DL-1G-POE-PCB-INJECTOR	DL-CS-RACK-1U-INJECTOR	LPZ 0 _B ->
Ethernet, Fast Ethernet, Token Ring, CDDI/FDDI	4	1 Gbps	250	150	af/at/bt	DL-1G-60V-PoE	DIN 35	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-60V-PoE	DIN 35	LPZ 0 _B ->
	4	10 Gbps	x	200	af/at/bt	DL-Cat.6A-60V-M (-R-M)	DL-PL-RACK-1U	LPZ 1 ->
	4	1 Gbps	250	150	af/at/bt	DL-1G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->
	4	10 Gbps	250	150	af/at/bt	DL-10G-60V-PoE-M	DL-PL-RACK-1U	LPZ 0 _B ->

TELECOMMUNICATIONS AND RADIOTRANSMISSIONS (COAXIAL INTERFACES)								
Application	Power load CW* [W]	Frequency range [GHz]	Max. DC load [A]	Impulse current per core [kA]		SPD type	Connectors	Impedance
				10/350 µs	8/20 µs			
Transmitters	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
	295	DC - 3,8	6	2,5	10	HX-230 N50	N (F/M,F/F)	50 Ω
	570	DC - 3,5	6	2,5	10	HX-350 N50	N (F/M,F/F)	50 Ω
	1175	DC - 3,0	6	2,5	10	HX-470 N50	N (F/M,F/F)	50 Ω
	dle ladění	laděno	NE	5	20	ZX-xxx N50	N (F/M,F/F)	50 Ω
	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
Transceivers, cellular networks (GSM, GSM-R, UMTS, 3G, LTE, 4G, 5G, TETRA,...)	295	DC - 3,8	6	2,5	10	HX-230 N50	N (F/M,F/F)	50 Ω
	570	DC - 3,5	6	2,5	10	HX-350 N50	N (F/M,F/F)	50 Ω
	1175	DC - 3,0	6	2,5	10	HX-470 N50	N (F/M,F/F)	50 Ω
	dle ladění	laděno	NE	5	20	ZX-xxx N50	N (F/M,F/F)	50 Ω
	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
	295	DC - 3,8	6	2,5	10	HX-230 N50	N (F/M,F/F)	50 Ω
Professional receivers (GPS, Galileo, Glonass, Beidou, SAT LNB, measuring and monitoring receivers,...)	x	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
	x	DC - 3,0	0,7	0,5	2,5	SX-090-B50 F/F	BNC (F/F)	50 Ω
	x	DC - 2,3	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω
	x	DC - 2,3	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω
	x	DC - 2,15	4	2,5	10	FX-090 F75 T F/F	F (F/F)	75 Ω
	x	DC - 2,3	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω
Commercial TV/SAT receivers (DVB-T2, DVB-S2,...)	x	DC - 2,3	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω
	x	DC - 2,3	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω
Microwave PTP links (split)	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
Microwave PTP links (all outdoor)	x	0,5	2x 1 (PoE)	0,25	0,15	DL-10G-PoE-IP66	RJ45	100 Ω
Coaxial video networks (CCTV, analogue)	x	0,15	0,06	x	5	VL-B75 F/F	BNC (F/F)	75 Ω
	x	DC - 2,3	4	2,5	10	FX-090-F75 F/F	F (F/F)	75 Ω
	x	DC - 2,3	0,7	0,5	2,5	SX-090-F75 F/F	F (F/F)	75 Ω
WLAN, WiFi (coaxial interfaces)	45	DC - 3,8	6	2,5	10	HX-090 N50	N (F/M,F/F)	50 Ω
	x	DC - 3,0	0,7	0,5	2,5	SX-090-B50 F/F	BNC (F/F)	50 Ω

* A correction related to the signal peak power (PAPR, Crest factor) should be done for digital signal modulations (OFDM etc.)

Notes

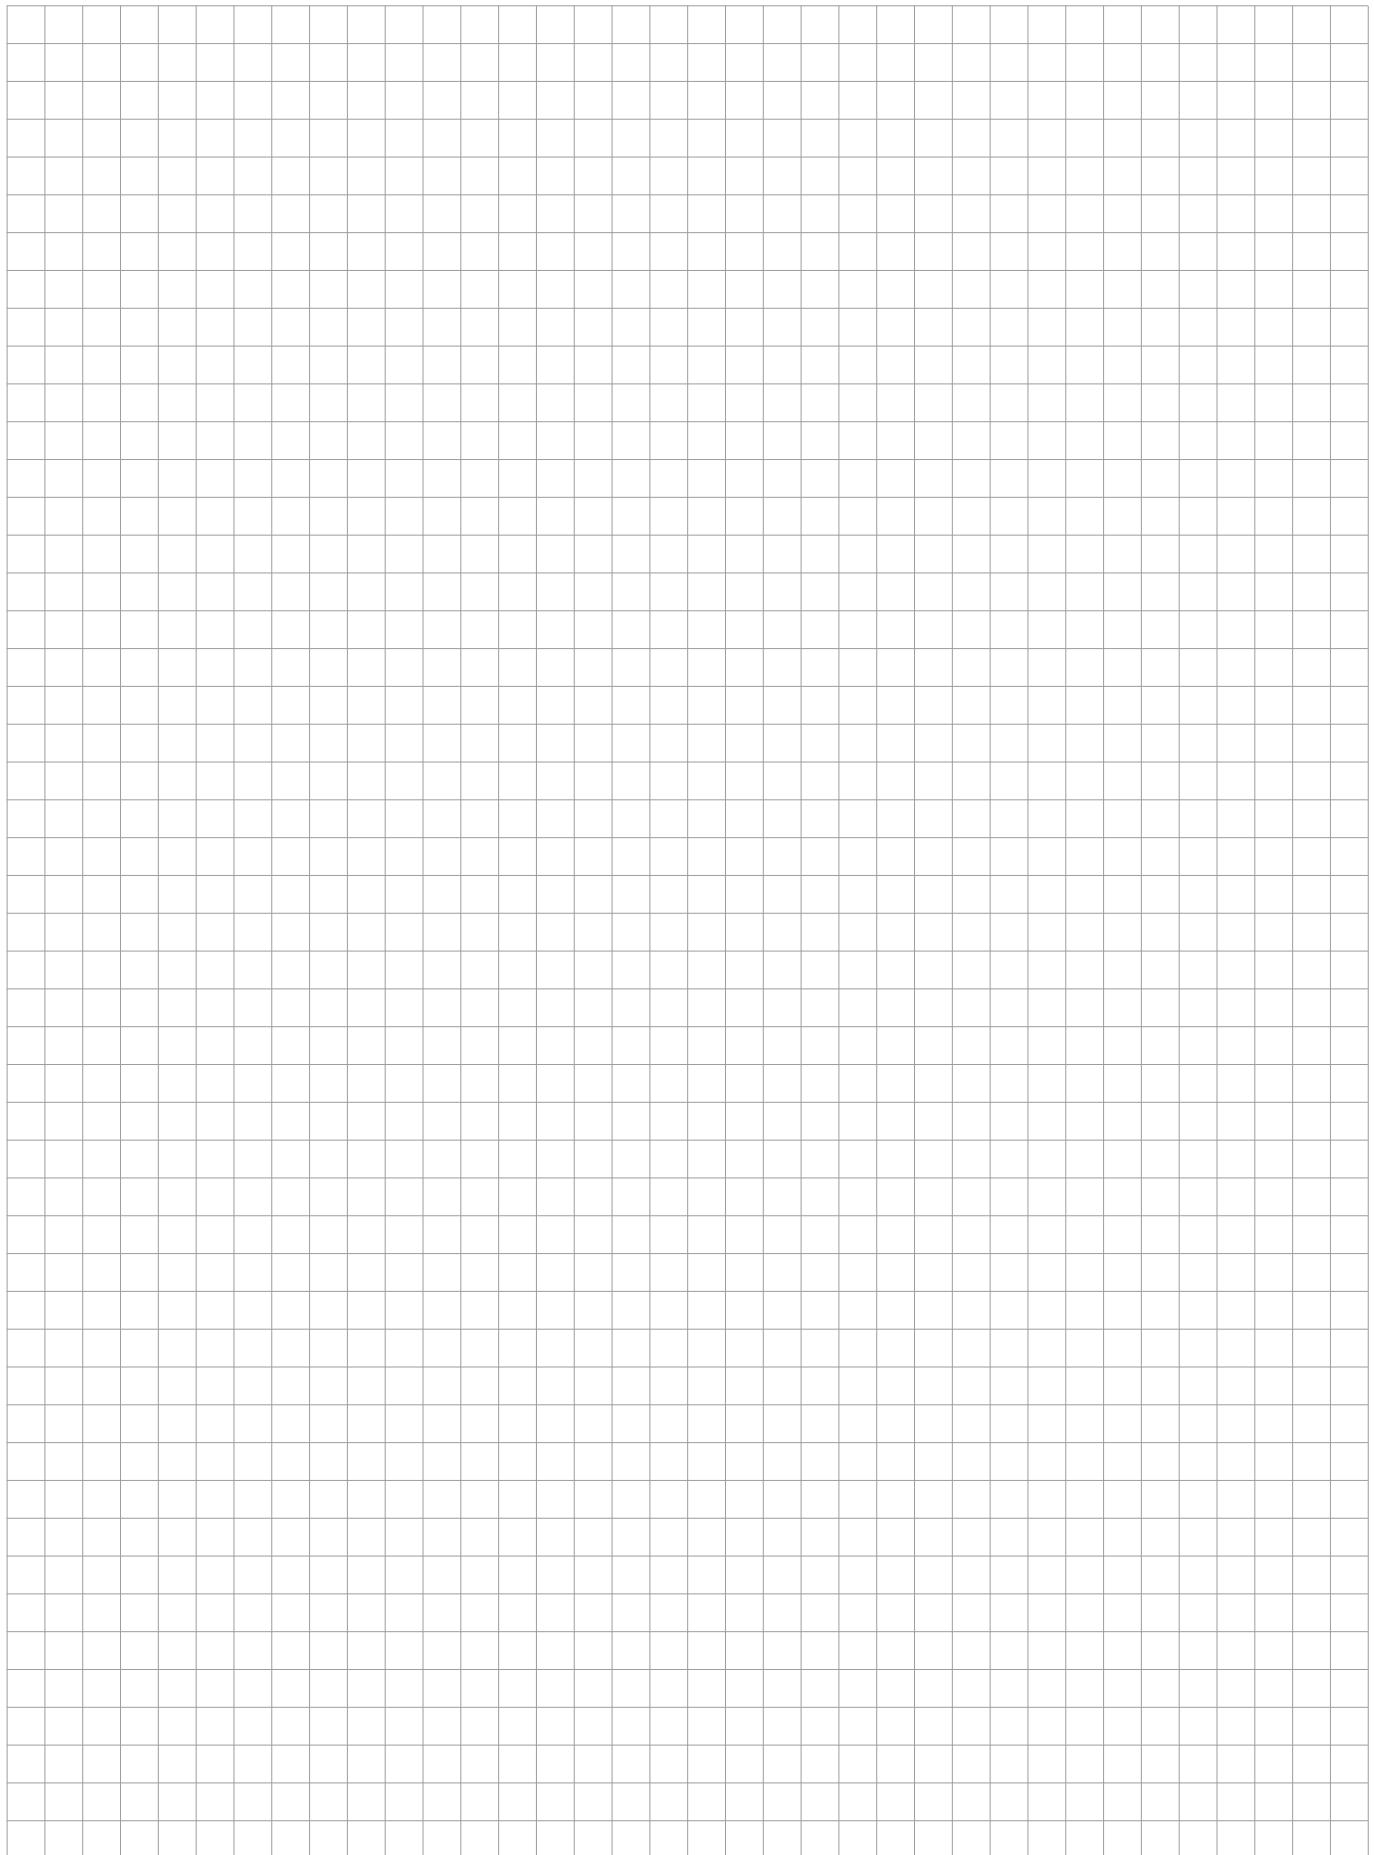

SPDs for data / signalling / telecommunication networks

Devices with pluggable module



I&C systems control and manage processes where, in the event of a failure, the lives of service personnel and residents of surrounding buildings may be at risk. The material damage can amount to tens of millions of crowns. This does not only concern large plants, but virtually all facilities with continuous operation. In addition to the direct production damage, there is also consequential damage from the non-fulfilment of supplier contracts, the payment of contractual penalties and

even the loss of customers and markets. One of the most common causes of failure is the disruptive influence of pulse-like overvoltages induced in measuring and power circuits. Surges are not only a danger for outdoor lines. In fact, pulses of several tens of volts induced from parallel-led power cables are sufficient to cause disturbances in measuring and power circuits. Our surge protection devices for I&C technology offer the ideal protective solution.


- SPDs with coarse and fine protection
- Pluggable modules for easy replacement
- For 1 up to 4-core lines
- Multiple core lines save the space
- All variants in "F" version
with separated line and protective earth

- Line BD – lightning current arresters
- Line BDM – for 2/3/4-core communication lines
- Line BDG – with separated signal ground and protective earth
- Line BDMHF, BDGHF – for high-speed lines
- Line DMP – for protection of signal and low-voltage power line
- Line DP – for extra-low voltage circuits

Overview of SPDs for data / signalling / telecommunication networks


Devices with pluggable module

BD-...-T...

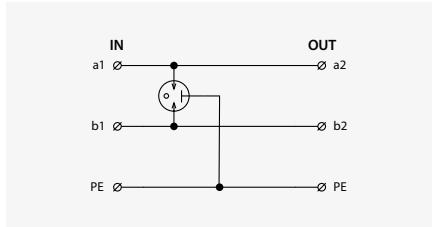


2 core line incoming from LPZ 0 to structure.
See page: 115

BDM-...

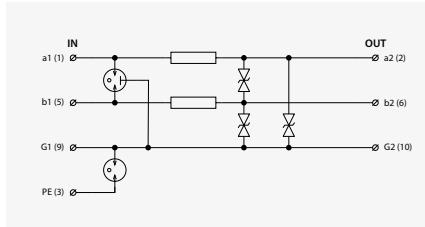


2-3 core line incoming from LPZ 0 to structure with one-pole connected with ground.
See page: 116–119

BDG-...

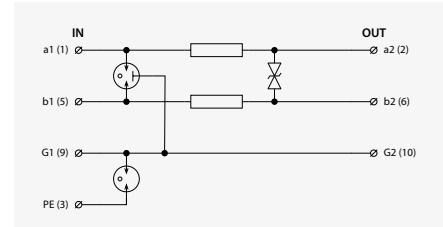


2 core floating line incoming from LPZ 0 to structure.
See page: 120–123

BDM-...-J...

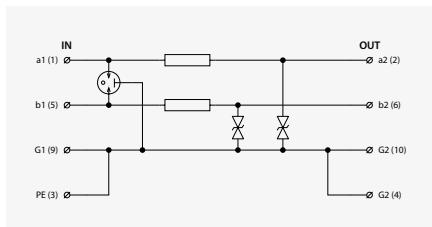


Single core lines.
See page: 124–126

BDG-...-4...

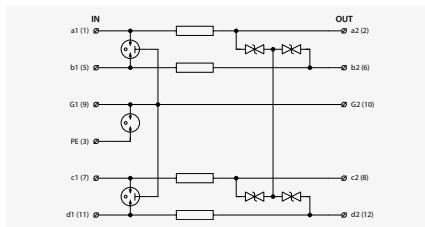


3-4 core floating line.
See page: 127

BDMHF-...

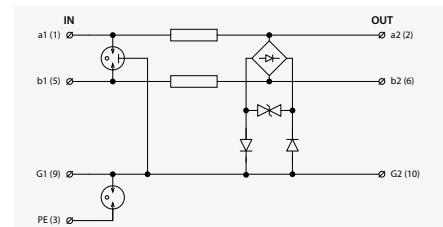


2 or 3 cores high-speed line.
See page: 128

BDMHF-...-4...

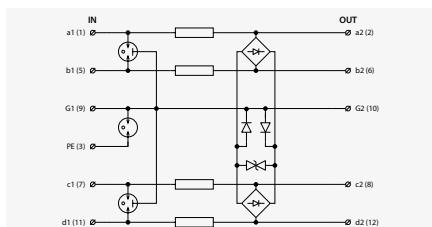


3-4 core high-speed line.
See page: 129

BDGHF-...

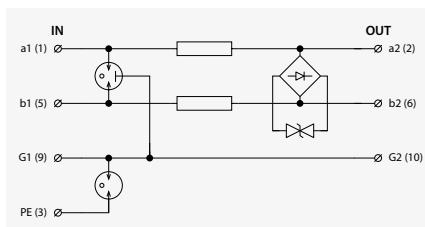


2 core high-speed floating line.
See page: 130–131

DMG-024-V/1-4FR1-DIF

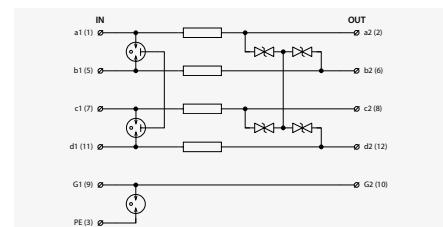


Up to 4 core line with differential surge protection.
Line separated from ground.
See page: 132

DMP-...

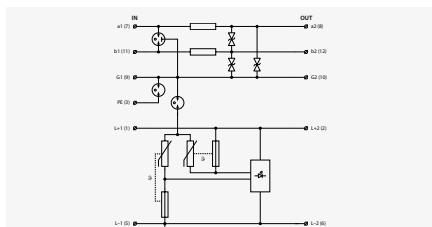


2 core line combined with power supply.
See page: 133

DMP-...-J...

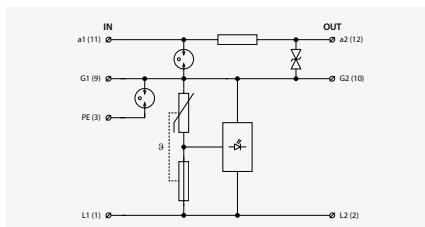


Single core line combined with power supply.
See page: 134

DP-...-16

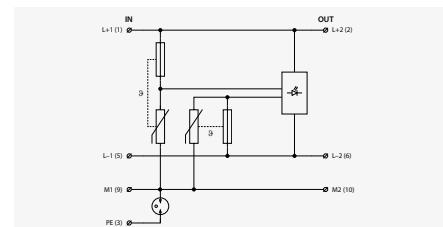

Power supply 12, 24, 48, 60 V up to 16 A.
See page: 135

DMZ-V-0 (Accessories)

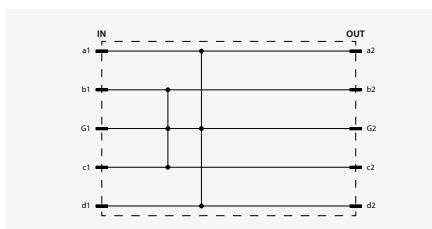


Short-circuiting module for maintenance of signalling lines.
See page: 197

BD-...-T-V/2-(F)16

Lightning current arresters, ST1 with plugable module
pluggable module

- lightning current arrester of two 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- mainly for protection of telecommunication lines against surge voltage
- in "F" version is the line separated from protective earth via GDT

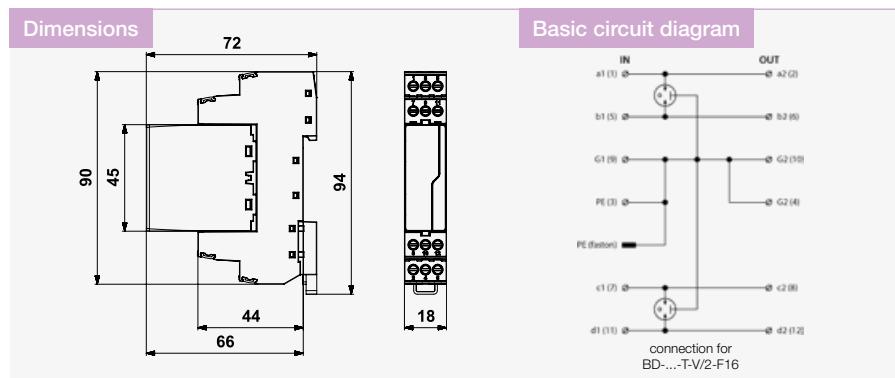

Parameter / Type	BD-090-T-V/2-16	BD-250-T-V/2-16	BD-090-T-V/2-F16	BD-250-T-V/2-F16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1	ST 1	ST 1	ST 1
Maximum operating voltage	U_c 50 V AC / 70 V DC	U_c 128 V AC / 180 V DC	U_c 50 V AC / 70 V DC	U_c 128 V AC / 180 V DC
Nominal load current	I_L 16 A	I_L 16 A	I_L 16 A	I_L 16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n -	I_n -	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{total} 20 kA	I_{total} 20 kA	I_{total} 20 kA	I_{total} 20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p -	U_p -
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p -	U_p -	U_p 550 V	U_p 550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p -	U_p -	U_p 550 V	U_p 550 V
Response time core-core	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a -	t_a -
Response time GND-PE	t_a -	t_a -	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a -	t_a -	t_a 100 ns	t_a 100 ns
Threshold frequency core-core	f 120 MHz	f 120 MHz	f 120 MHz	f 120 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05550	A05551	A05554	A05555

Spare module	BD-090-T-V/2-0	BD-250-T-V/2-0	BD-090-T-V/2-0	BD-250-T-V/2-0
Ordering number	A05390	A05391	A05390	A05391


BDM-...-V/1-FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of 2/3-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDM-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

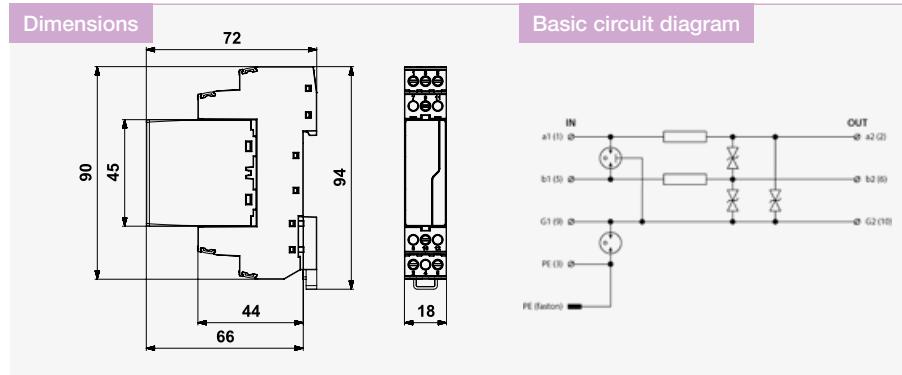

Parameter / Type	BDM-006-V/1-FR1	BDM-012-V/1-FR1	BDM-024-V/1-FR1	BDM-048-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
D1 impulse discharge current (10/350 μ s) core-core I_{Imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core f	0,8 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05709	A05710	A05711	A05712

Spare module	BDM-006-V/1-0	BDM-012-V/1-0	BDM-024-V/1-0	BDM-048-V/1-0
Ordering number	A05501	A05502	A05503	A05504


BDM-...-V/1-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of 2/3-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDM-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

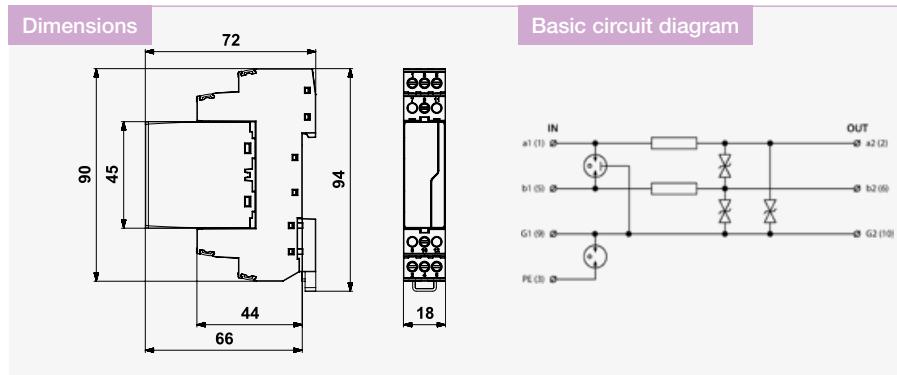

Parameter / Type	BDM-060-V/1-FR1	BDM-230-V/1-FR	BDM-230-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 60 V DC	U_n 230 V DC	U_n 230 V DC
Maximum operating voltage	U_c 45 V AC / 64 V DC	U_c 177 V AC / 250 V DC	U_c 177 V AC / 250 V DC
Nominal load current	I_L 1 A	I_L 0,5 A	I_L 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{Imp} 85 V	I_{Imp} 350 V	I_{Imp} 350 V
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 550 V	I_{Total} 550 V	I_{Total} 550 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 85 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 2,5 kA	U_p 2,5 kA	U_p 2,5 kA
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p 5 kA	U_p 5 kA	U_p 5 kA
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial resistance per core	R 0,8 Ω	R 3,3 Ω	R 1,6 Ω
Threshold frequency core-core	f 6,5 MHz	f 11 MHz	f 11 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2		
Ordering number	A06438	A05713	A06461

Spare module	BDM-060-V/1-0	BDM-230-V/1-0	BDM-230-V/1-0
Ordering number	A06437	A05505	A05505


BDM-...-V/1-FR2

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2/3-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

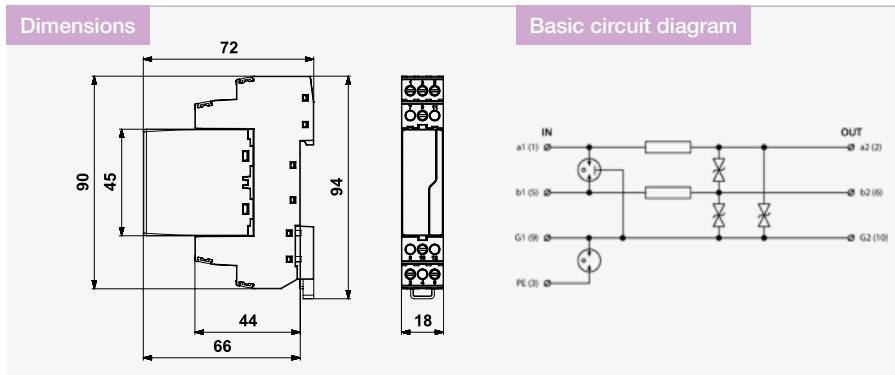

Parameter / Type	BDM-006-V/1-FR2	BDM-012-V/1-FR2	BDM-024-V/1-FR2	BDM-048-V/1-FR2	BDM-060-V/1-FR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n 6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage	U _c 6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current	I _L 2 A	2 A	2 A	2 A	2 A
C2 nominal discharge current (8/20 µs) per core	I _n 10 kA	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 µs) GND-PE	I _n 20 kA	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total} 20 kA	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/µs	U _p 12 V	22 V	46 V	65 V	85 V
C3 voltage protection level mode GND-PE at 1 kV/µs	U _p 550 V	550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 µs) per core	I _{Img} 2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 µs) cores-PE	I _{Total} 5 kA	5 kA	5 kA	5 kA	5 kA
C3 voltage protection level mode core-GND at 1 kV/µs	U _p 12 V	22 V	46 V	65 V	85 V
Response time core-core	t _a 1 ns	1 ns	1 ns	1 ns	1 ns
Response time GND-PE	t _a 100 ns	100 ns	100 ns	100 ns	100 ns
Response time core-GND	t _a 1 ns	1 ns	1 ns	1 ns	1 ns
Serial resistance per core	R 0,4 Ω	0,4 Ω	0,4 Ω	0,4 Ω	0,4 Ω
Threshold frequency core-core	f 0,8 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2				
Ordering number	A06385	A06398	A06411	A06424	A06439

Spare module	BDM-006-V/1-0	BDM-012-V/1-0	BDM-024-V/1-0	BDM-048-V/1-0	BDM-060-V/1-0
Ordering number	A05501	A05502	A05503	A05504	A06437


BDM-...-V/2-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

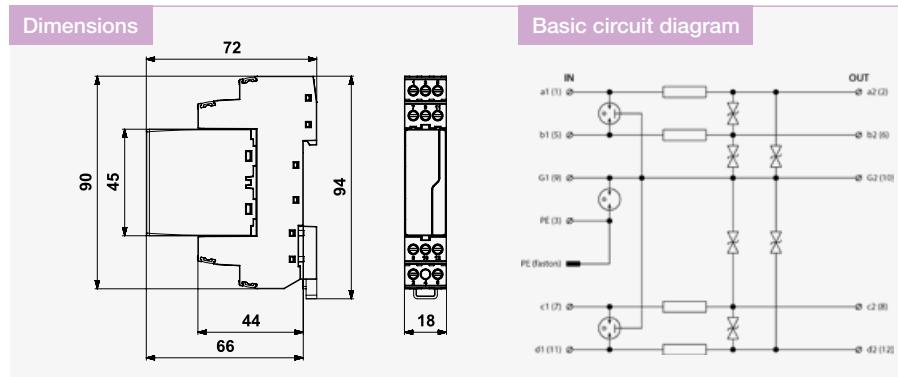

Parameter/Type	BDM-006-V/2-FR1	BDM-012-V/2-FR1	BDM-024-V/2-FR1	BDM-048-V/2-FR1	BDM-060-V/2-FR1	BDM-230-V/2-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V	85 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V	85 V	350 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA	1 ns
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA	5 kA	2,5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns	1 ns	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	0,8 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz	11 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2					
Ordering number	A06388	A06401	A06414	A06427	A06443	A06464

Spare module	BDM-006-V/2-0	BDM-012-V/2-0	BDM-024-V/2-0	BDM-048-V/2-0	BDM-060-V/2-0	BDM-230-V/2-0
Ordering number	A06387	A06400	A06413	A06426	A06442	A06463


BDG-...-V/1-FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of shielded 2-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDG-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly the measuring circuits) against impact of surge voltage

- coarse and fine surge protection (core – core) and coarse protection (core – GND) in differential mode, coarse surge protection in common mode (line – PE)

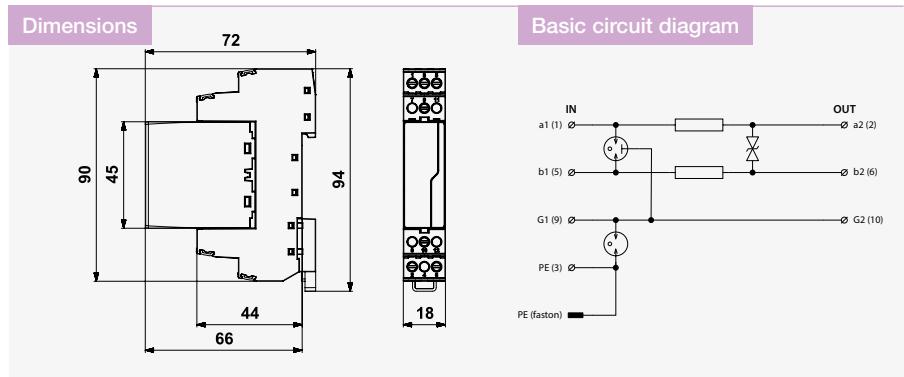

Parameter / Type	BDG-006-V/1-FR1	BDG-012-V/1-FR1	BDG-024-V/1-FR1	BDG-048-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
D1 impulse discharge current (10/350 μ s) core-core I_{Imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	22 V	46 V	65 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core f	1,2 MHz	3 MHz	6 MHz	7 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A05704	A05705	A05706	A05707

Spare module	BDG-006-V/1-0	BDG-012-V/1-0	BDG-024-V/1-0	BDG-048-V/1-0
Ordering number	A05399	A05400	A05401	A05402


BDG-...-V/1-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- coarse and fine surge protection of shielded 2-core telecommunication, data and other lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building

- for protection of telecommunication lines (version BDG-230) and communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly the measuring circuits) against impact of surge voltage

- coarse and fine surge protection (core – core) and coarse protection (core – GND) in differential mode, coarse surge protection in common mode (line – PE)

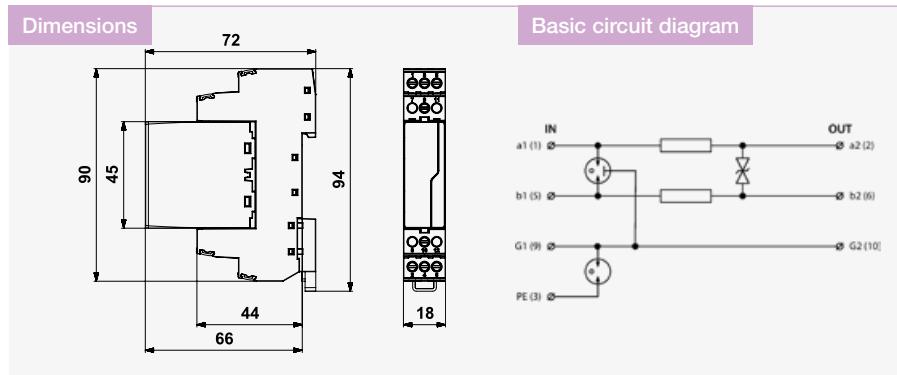

Parameter / Type	BDG-060-V/1-FR1	BDG-230-V/1-FR	BDG-230-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 60 V DC	U_n 230 V DC	U_n 230 V DC
Maximum operating voltage	U_c 45 V AC / 64 V DC	U_c 177 V AC / 250 V DC	U_c 177 V AC / 250 V DC
Nominal load current	I_L 1 A	I_L 0,5 A	I_L 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{imp} 85 V	I_{imp} 350 V	I_{imp} 350 V
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 550 V	I_{Total} 550 V	I_{Total} 550 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 2,5 kA	U_p 2,5 kA	U_p 2,5 kA
C3 voltage protection level mode core-GND at 1 kV/ μ s	U_p 5 kA	U_p 5 kA	U_p 5 kA
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial resistance per core	R 0,8 Ω	R 3,3 Ω	R 1,6 Ω
Threshold frequency core-core	f 10 MHz	f 16 MHz	f 16 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2		
Ordering number	A06499	A05708	A06514

Spare module	BDG-060-V/1-0	BDG-230-V/1-0	BDG-230-V/1-0
Ordering number	A06498	A05403	A05403


BDG-...-V/1-FR2

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C (version BDG-230), MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of

- surge voltage
- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

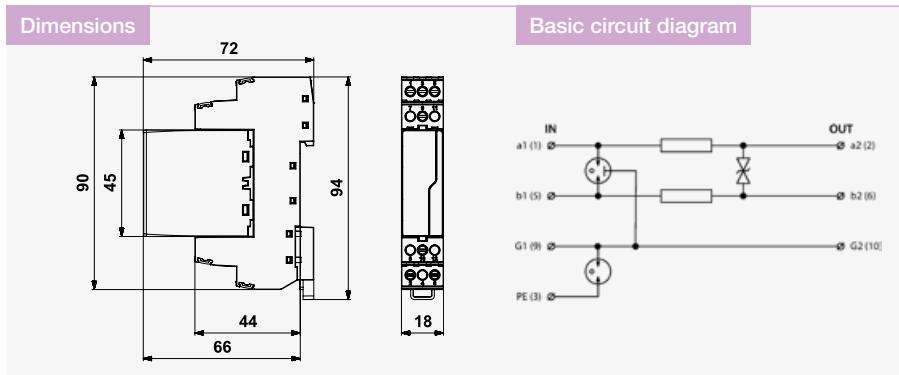

Parameter / Type	BDG-006-V/1-FR2	BDG-012-V/1-FR2	BDG-024-V/1-FR2	BDG-048-V/1-FR2	BDG-060-V/1-FR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n 6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage	U _c 6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current	I _L 2 A	2 A	2 A	2 A	2 A
C2 nominal discharge current (8/20 µs) per core	I _n 10 kA	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 µs) per core GND-PE	I _n 20 kA	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total} 20 kA	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/µs	U _p 12 V	22 V	46 V	65 V	85 V
C3 voltage protection level mode core GND-PE at 1 kV/µs	U _p 550 V	550 V	550 V	550 V	550 V
C3 voltage protection level mode core-GND at 1 kV/µs	U _p 550 V	550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 µs) per core	I _{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 µs) cores-PE	I _{Total} 5 kA	5 kA	5 kA	5 kA	5 kA
Response time core-core	t _a 1 ns	1 ns	1 ns	1 ns	1 ns
Response time GND-PE	t _a 100 ns	100 ns	100 ns	100 ns	100 ns
Response time core-GND	t _a 100 ns	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,4 Ω	0,4 Ω	0,4 Ω	0,4 Ω	0,4 Ω
Treshold frequency core-core	f 1,2 MHz	3 MHz	6 MHz	7 MHz	10 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2				
Ordering number	A06469	A06477	A06485	A06493	A06500

Spare module	BDG-006-V/1-0	BDG-012-V/1-0	BDG-024-V/1-0	BDG-048-V/1-0	BDG-060-V/1-0
Ordering number	A05399	A05400	A05401	A05402	A06498


BDG-...-V/2-FR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 2-core signalling lines
 - installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge

- voltage
- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

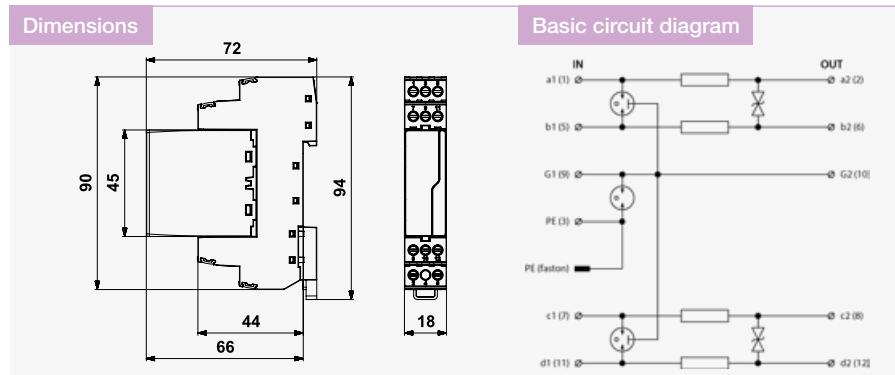

Parameter/Type	BDG-006-V/2-FR1	BDG-012-V/2-FR1	BDG-024-V/2-FR1	BDG-048-V/2-FR1	BDG-060-V/2-FR1	BDG-230-V/2-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage	U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current	I_L	1 A	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 µs) per core	I_n	10 kA				
C2 nominal discharge current (8/20 µs) per core GND-PE	I_n	20 kA				
C2 total discharge current (8/20 µs) cores-PE	I_{Total}	20 kA	20 kA	20 kA	20 kA	10 kA
C3 voltage protection level mode core-core at 1 kV/µs	U_p	12 V	22 V	46 V	65 V	85 V
C3 voltage protection level mode core GND-PE at 1 kV/µs	U_p	550 V				
C3 voltage protection level mode core-GND at 1 kV/µs	U_p	550 V				
D1 lightning impulse current (10/350 µs) per core	I_{Imp}	2,5 kA				
D1 total discharge current (10/350 µs) cores-PE	I_{Total}	5 kA				
Response time core-core	t_a	1 ns				
Response time GND-PE	t_a	100 ns				
Response time core-GND	t_a	100 ns				
Serial resistance per core	R	0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Treshold frequency core-core	f	1,2 MHz	3 MHz	6 MHz	7 MHz	10 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm	DIN rail 35mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2					
Ordering number	A06472	A06480	A06488	A06496	A06504	A06517

Spare module	BDG-006-V/2-0	BDG-012-V/2-0	BDG-024-V/2-0	BDG-048-V/2-0	BDG-060-V/2-0	BDG-230-V/2-0
Ordering number	A06471	A06479	A06487	A06495	A06503	A06516


BDM-...-V/2-JFR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for two 1-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – GND) in differential mode and coarse surge protection in common mode (line – PE)

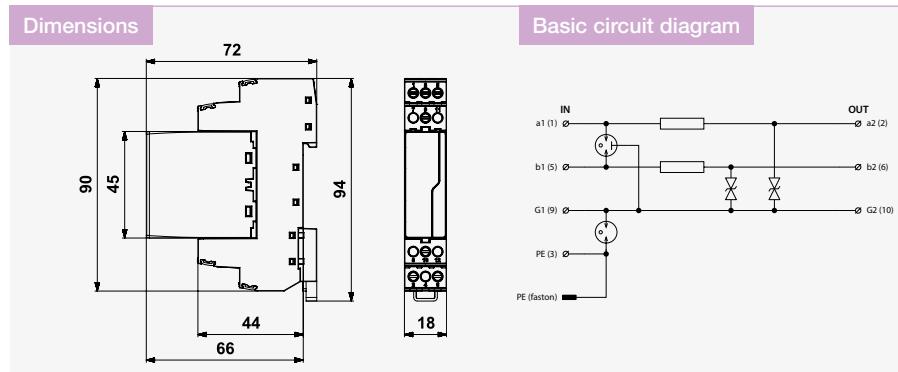

Parameter / Type	BDM-006-V/2-JFR1	BDM-006-V/2-JFR2	BDM-012-V/2-JFR1	BDM-012-V/2-JFR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	6 V DC	12 V DC	12 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	6 V AC / 8,5 V DC	11 V AC / 16 V DC	11 V AC / 16 V DC
Nominal load current I_L	1 A	2 A	1 A	2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core GND-PE at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 12 V	12 V	22 V	22 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA	5 kA	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,4 Ω	0,8 Ω	0,4 Ω
Threshold frequency core-GND f	0,8 MHz	0,8 MHz	2 MHz	2 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06390	A06391	A06403	A06404

Spare module	BDM-006-V/2-J-0	BDM-006-V/2-J-0	BDM-012-V/2-J-0	BDM-012-V/2-J-0
Ordering number	A06389	A06389	A06402	A06402


BDM-...-V/2-JFR.

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for two 1-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – GND) in differential mode and coarse surge protection in common mode (line – PE)

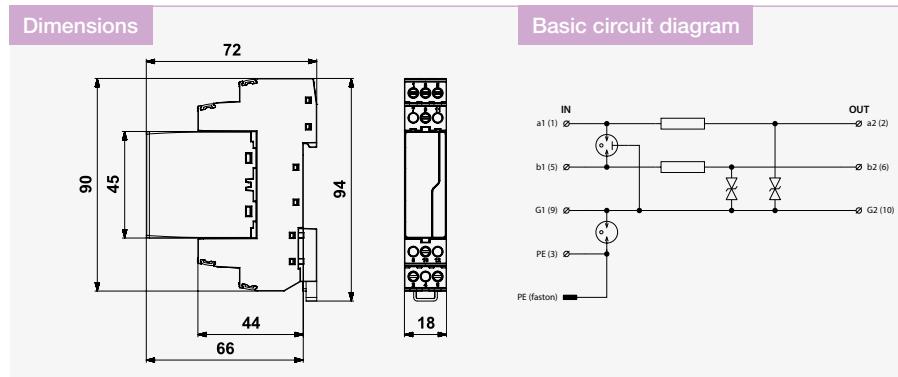

Parameter / Type	BDM-024-V/2-JFR1	BDM-024-V/2-JFR2	BDM-048-V/2-JFR1	BDM-048-V/2-JFR2
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	24 V DC	24 V DC	48 V DC	48 V DC
Maximum operating voltage U_c	25 V AC / 36 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	36 V AC / 51 V DC
Nominal load current I_L	1 A	2 A	1 A	2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core GND-PE at 1 kV/ μ s	U_p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 46 V	46 V	65 V	65 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA	5 kA	5 kA
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	0,8 Ω	0,4 Ω	0,8 Ω	0,4 Ω
Threshold frequency core-GND f	4 MHz	4 MHz	5 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06416	A06417	A06429	A06430

Spare module	BDM-024-V/2-J-0	BDM-024-V/2-J-0	BDM-048-V/2-J-0	BDM-048-V/2-J-0
Ordering number	A06415	A06415	A06428	A06428


BDM-...-V/4-JFR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with plugable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for 4-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

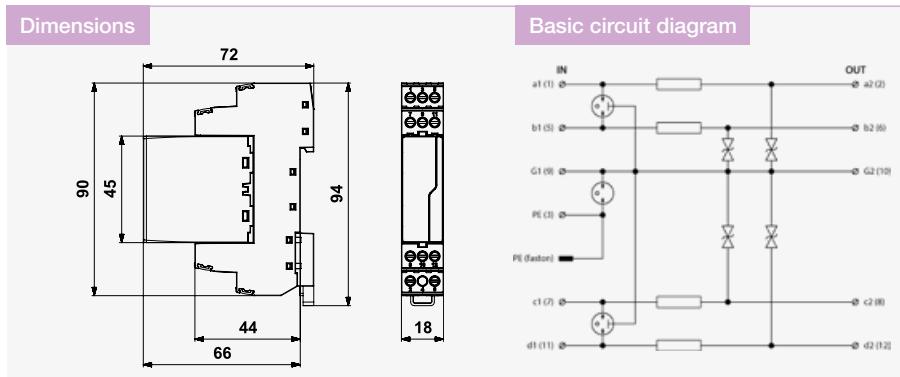

Parameter / Type	BDM-006-V/4-JFR1	BDM-012-V/4-JFR1	BDM-024-V/4-JFR1	BDM-048-V/4-JFR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC	U_n 48 V DC
Maximum operating voltage	U_c 6 V AC / 8,5 V DC	U_c 11 V AC / 16 V DC	U_c 25 V AC / 36 V DC	U_c 36 V AC / 51 V DC
Nominal load current	I_L 1 A	I_L 1 A	I_L 1 A	I_L 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	I_n 20 kA	I_n 20 kA	I_n 20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA	I_{Total} 20 kA
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	U_p 550 V	U_p 550 V	U_p 550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 12 V	U_p 22 V	U_p 46 V	U_p 65 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA	I_{imp} 2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA	I_{Total} 5 kA
Response time GND-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns	t_a 100 ns
Response time core-GND	t_a 1 ns	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial resistance per core	R 0,8 Ω	R 0,8 Ω	R 0,8 Ω	R 0,8 Ω
Threshold frequency core-GND	f 0,8 MHz	f 2 MHz	f 4 MHz	f 5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06396	A06409	A06422	A06435


Spare module	BDM-006-V/4-J-0	BDM-012-V/4-J-0	BDM-024-V/4-J-0	BDM-048-V/4-J-0
Ordering number	A06395	A06408	A06421	A06434

BDG-...-V/1-4FR1

Lightning current arrester with coarse and fine surge protection, ST1+2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection for up to 4-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)

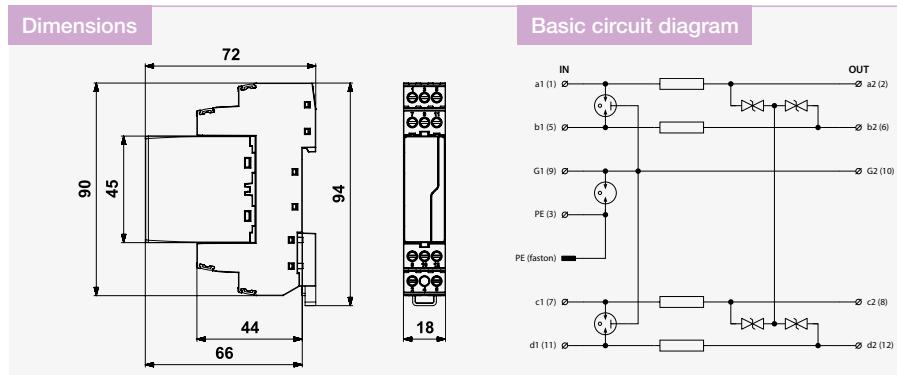

Parameter / Type	BDG-006-V/1-4FR1	BDG-012-V/1-4FR1	BDG-024-V/1-4FR1	BDG-048-V/1-4FR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage	U _n 6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage	U _c 6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current	I _L 1 A	1 A	1 A	1 A
C2 nominal discharge current (8/20 µs) per core	I _n 10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 µs) GND-PE	I _n 20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total} 20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/µs	U _p 18 V	24 V	46 V	90 V
C3 voltage protection level mode GND-PE at 1 kV/µs	U _p 550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/µs	U _p 550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 µs) per core	I _{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 µs) cores-PE	I _{Total} 5 kA	5 kA	5 kA	5 kA
Response time core-core	t _a 1 ns	1 ns	1 ns	1 ns
Response time GND-PE	t _a 100 ns	100 ns	100 ns	100 ns
Response time core-GND	t _a 100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω	0,8 Ω	0,8 Ω
Threshold frequency core-core	f 1,2 MHz	3 MHz	6 MHz	7 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06467	A06475	A06483	A06491

Spare module	BDG-006-V/1-4-0	BDG-012-V/1-4-0	BDG-024-V/1-4-0	BDG-048-V/1-4-0
Ordering number	A06466	A06474	A06482	A06490

BDMHF-...-V/1-FR1


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces, MaR systems, mainly the RS-485 and PROFIBUS lines, of I&C, MaR, electronic security and fire detection systems, etc. against impact

- of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

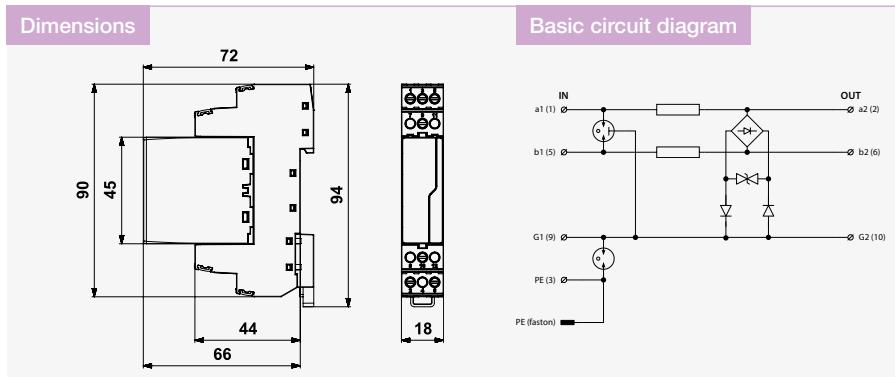

Parameter / Type	BDMHF-006-V/1-FR1	BDMHF-024-V/1-FR1
Connection (input – output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	24 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	25 V AC / 36 V DC
Nominal load current I_L	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	48 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p –	–
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s	U_p 14 V	48 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp} 2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total} 5 kA	5 kA
Response time core-core	t_a 1 ns	1 ns
Response time core-PE	t_a –	–
Response time GND-PE	t_a 100 ns	100 ns
Response time core-GND	t_a 1 ns	1 ns
Serial resistance per core	R 0,8 Ω	0,8 Ω
Threshold frequency core-core	f 70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A06547	A06553

Spare module	BDMHF-006-V/1-0	BDMHF-024-V/1-0
Ordering number	A06543	A06549

BDMHF-...-V/1-4FR1


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 4-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of communication interfaces, MaR systems, mainly the RS-485 and PROFIBUS lines, of I&C, MaR, electronic security and fire detection systems, etc. against impact

- of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

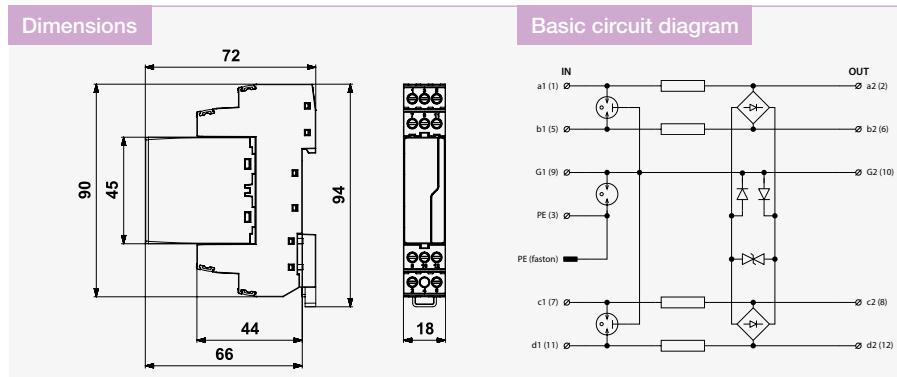

Parameter / Type	BDMHF-006-V/1-4FR1	BDMHF-024-V/1-4FR1
Connection (input – output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	24 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	25 V AC / 36 V DC
Nominal load current I_L	1 A	1 A
C2 nominal discharge current (8/20 μ s) per core	I_n	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n	20 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total}	20 kA
C3 volt. prot. lev. mode core-core at 1 kV/ μ s	U_p	16 V
C3 volt. prot. lev. mode core-PE at 1 kV/ μ s	U_p	–
C3 volt. prot. lev. mode GND-PE at 1 kV/ μ s	U_p	550 V
C3 volt. prot. lev. mode core GND at 1 kV/ μ s	U_p	16 V
D1 lightning impulse current (10/350 μ s) per core	I_{imp}	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total}	5 kA
Response time core-core	t_a	1 ns
Response time core-PE	t_a	–
Response time GND-PE	t_a	100 ns
Response time core-GND	t_a	1 ns
Serial resistance per core	R	0,8 Ω
Threshold frequency core-core	f	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A06545	A06551

Spare module	BDMHF-006-V/1-4-0	BDMHF-024-V/1-4-0
Ordering number	A06544	A06550

BDGHF-...-V/1-FR.


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of telecommunication lines (version BDGHF-230) and interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485,

- PROFIBUS interfaces) against surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

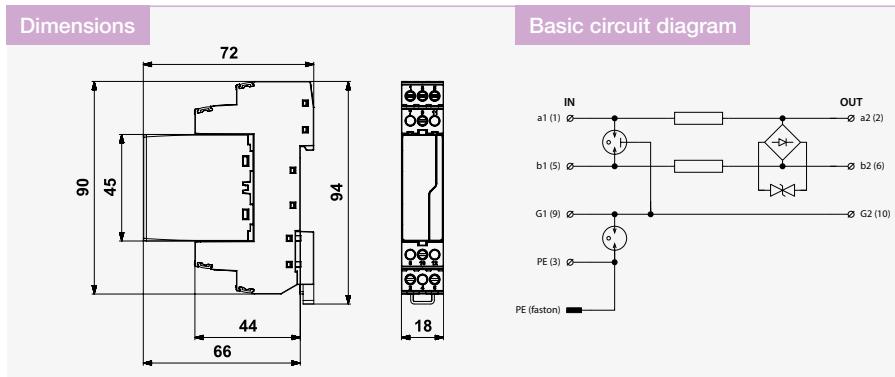

Parameter / Type	BDGHF-006-V/1-FR1	BDGHF-012-V/1-FR1	BDGHF-024-V/1-FR1	BDGHF-230-V/1-FR
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	14 V	24 V	48 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	70 MHz	70 MHz	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06520	A06526	A06532	A06538

Spare module	BDGHF-006-V/1-0	BDGHF-012-V/1-0	BDGHF-024-V/1-0	BDGHF-230-V/1-0
Ordering number	A06519	A06525	A06531	A06537

BDGHF-...-V/2-FR.


Surge protection for industrial communication bus (eg. PROFIBUS)

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT

- lightning current arrester with coarse and fine surge protection of 2-core high-speed signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building or higher and also installation

- close to protected device
- for protection of telecommunication lines (version BDGHF-230) and interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485,

- PROFIBUS interfaces) against surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

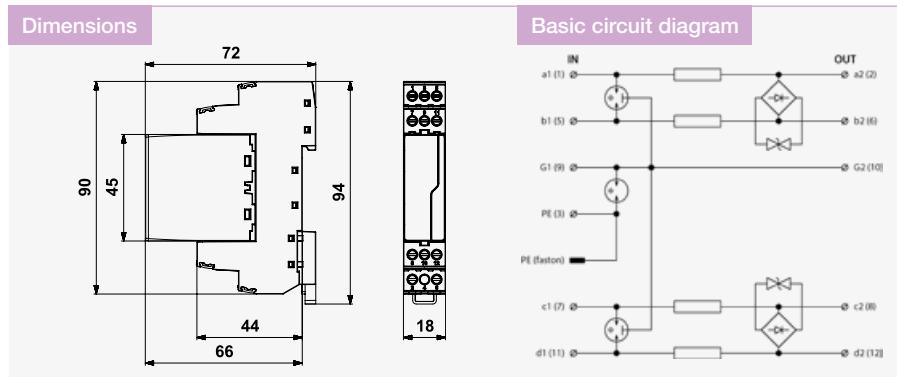


Parameter / Type	BDGHF-006-V/2-FR1	BDGHF-012-V/2-FR1	BDGHF-024-V/2-FR1	BDGHF-230-V/2-FR1
Connection (input – output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 1+2+3	ST 1+2+3	ST 1+2+3	ST 1+2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	230 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	177 V AC / 250 V DC
Nominal load current I_L	1 A	1 A	1 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE I_n	20 kA	20 kA	20 kA	20 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	20 kA	20 kA	20 kA	20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	14 V	24 V	48 V	350 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
C3 voltage protection level mode core GND at 1 kV/ μ s U_p	550 V	550 V	550 V	550 V
D1 lightning impulse current (10/350 μ s) per core I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE I_{Total}	5 kA	5 kA	5 kA	5 kA
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time GND-PE t_a	100 ns	100 ns	100 ns	100 ns
Response time core-GND t_a	100 ns	100 ns	100 ns	100 ns
Serial resistance per core R	0,8 Ω	0,8 Ω	0,8 Ω	3,3 Ω
Threshold frequency core-core f	70 MHz	70 MHz	70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2			
Ordering number	A06523	A06529	A06535	A06541

Spare module	BDGHF-006-V/2-0	BDGHF-012-V/2-0	BDGHF-024-V/2-0	BDGHF-230-V/2-0
Ordering number	A06522	A06528	A06534	A06540

DMG-024-V/1-4FR1-DIF

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 with pluggable module
pluggable module, coupling impedance (R – resistance), shielding (G) separated from protective earth via GDT

- coarse and fine surge protection for max. 4-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces)
- coarse and fine surge protection only in differential mode (core – core)

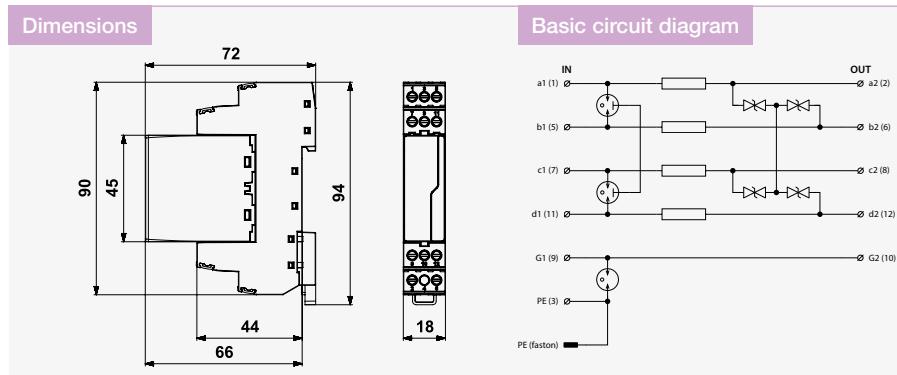

Parameter / Type	DMG-024-V/1-4FR1-DIF
Connection (input – output)	terminals-terminals
Location of SPD	ST 2+3
Nominal voltage	U_n 24 V DC
Maximum operating voltage	25 V AC / 36 V DC
Nominal load current	I_n 1 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n 20 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 46 V
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p 550 V
Response time core-core	t_a 1 ns
Response time GND-PE	t_a 100 ns
Serial resistance per core	R 0,8 Ω
Threshold frequency core-core	f 6 MHz
Isolation voltage core-GND(PE)	> 4 kV
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2
Ordering number	A06281

Spare module	DMG-024-V/1-4-0
Ordering number	A06282


DMP-...-V/1-FR1

Combination of surge protections for signal and supply lines

pluggable module, coupling impedance (R – resistance) in part of data, line separated from protective earth via GDT

- combination of two-stage surge protection of 2-core signalling line in data part and surge protection for ELV in supply part
- installation close to protected equipment

- for protection of interfaces of I&C, electronic security and fire detection systems, etc., mainly for measuring circuits and sensors where signal and supply are transmitted in one cable, against surge voltage

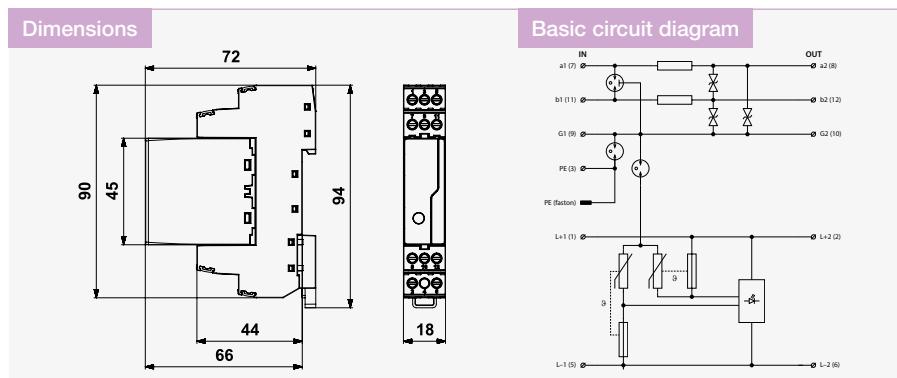

Parameter / Type	DMP-012-V/1-FR1	DMP-024-V/1-FR1
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage	U_n	12 V DC
Maximum operating voltage	U_c	11 V AC / 16 V DC
line part	Nominal load current	1 A
	C2 total discharge current (8/20 μ s) cores-PE	20 kA
	C3 voltage protection level mode core-core at 1 kV/ μ s	22 V
	C3 voltage protection level mode GND-PE at 1 kV/ μ s	550 V
	Response time core-core	1 ns
	Response time GND-PE	100 ns
	Serial resistance per core	0,8 Ω
	Threshold frequency core-core	2 MHz
	Nominal load current	16 A
	Test voltage L+(L-)-PE	4 kV
power part	Voltage protection level L+ - L-	0,18 kV
	Voltage protection level L+(L-)-PE	0,95 kV
	Maximum overcurrent protection	16 A gL/gG or B 16 A
	Response time L+ - L-	25 ns
	Response time L+(L-)-PE	100 ns
	Fault indication	red indicator
	Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A05798	A05799

Spare module	DMP-012-V/1-0	DMP-024-V/1-0
Ordering number	A05814	A05815

DMP-...-V/1-JFR1


Combination of surge protections for signal and supply lines

pluggable module, coupling impedance (R – resistance) in part of data, line separated from protective earth via GDT

- surge protection of 3-core line comprehend signal transmission and supply
- installation close to protected equipment
- for protection of interfaces of I&C, electronic security and fire detection

systems, etc., mainly for measuring circuits and sensors where signal and supply are transmitted in one cable, against surge voltage

- single common wire for power supply and signal transmission

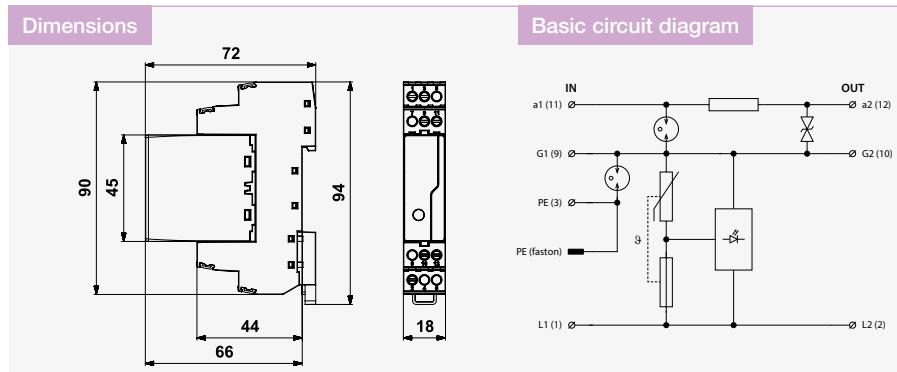


Parameter / Type	DMP-012-V/1-JFR1	DMP-024-V/1-JFR1
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage	U_n	12 V DC
Maximum operating voltage	U_c	11 V AC / 16 V DC
Nominal load current	I_L	1 A
C2 nominal discharge current (8/20 μ s) per core	I_n	10 kA
C2 nominal discharge current (8/20 μ s) GND-PE	I_n	10 kA
C3 voltage protection level mode GND-PE at 1 kV/ μ s	U_p	550 V
Response time core-PE	t_a	1 ns
Response time GND-PE	t_a	100 ns
Response time core-GND	t_a	1 ns
Serial resistance per core	R	0,8 Ω
Threshold frequency core-core	f	2 MHz
Nominal load current	I_L	16 A
Test voltage L+(L)-PE	U_{oc}	4 kV
Voltage protection level L+(L)-PE	U_p	0,75 kV
Maximum overcurrent protection		16 A gL/gG or B 16 A
Response time L+(L)-PE		100 ns
Fault indication	red indicator	red indicator
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A05802	A05803

Spare module	DMP-012-V/1-J-0	DMP-024-V/1-J-0
Ordering number	A05816	A05817

DP-...-V/1-F16

Surge protection for ELV power supply networks, with plugable module
pluggable module, visual fault signalling, middle conductor separated from protective earth via GDT

- surge protection for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

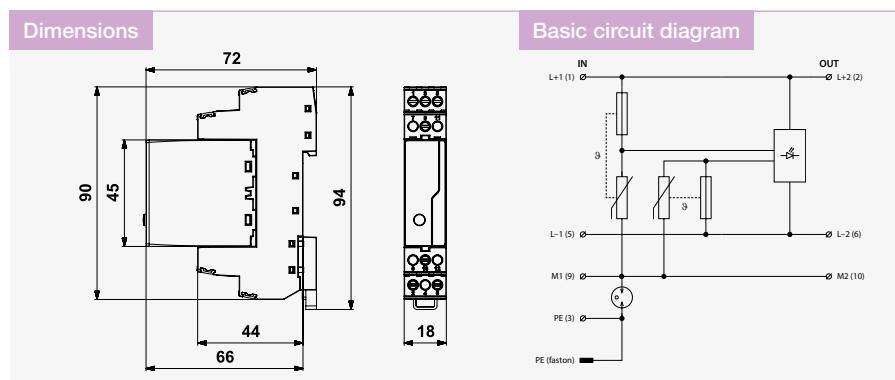


Parameter / Type	DP-012-V/1-F16	DP-024-V/1-F16	DP-048-V/1-F16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 2	ST 2
Nominal voltage	U_n 12 V AC	U_n 24 V AC	U_n 48 V AC
Maximum operating voltage	U_c 20 V AC / 20 V DC	U_c 34 V AC / 34 V DC	U_c 60 V AC / 60 V DC
Nominal load current	I_L 16 A	I_L 16 A	I_L 16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 2 kA	I_n 2 kA	I_n 2 kA
C2 voltage protection level mode core-core at I_n	U_p 180 V	U_p 230 V	U_p 370 V
C2 voltage protection level mode core-PE at I_n	U_p 750 V	U_p 750 V	U_p 750 V
C2 voltage protection level mode core-PE at I_n	U_p 750 V	U_p 750 V	U_p 750 V
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-) - PE	4 kV	4 kV	4 kV
Test voltage M-PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,18 kV	0,23 kV	0,37 kV
Voltage protection level L+(L-) - PE	0,75 kV	0,75 kV	0,75 kV
Voltage protection level M-PE	0,75 kV	0,75 kV	0,75 kV
Maximum overcurrent protection	16 A gL/gG or B 16 A	16 A gL/gG or B 16 A	16 A gL/gG or B 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
Response time M-PE	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012, EN 61643-11:2012, IEC 61643-11:2011 / T3, C2		
Ordering number	A05664	A05665	A05666

Spare module	DP-012-V/1-0	DP-024-V/1-0	DP-048-V/1-0
Ordering number	A05692	A05693	A05694

BD / BDM / BDG / BDMHF / BDGHF / DMP / DP-...-V/.-0

Replaceable modules of BD., DM., DP.

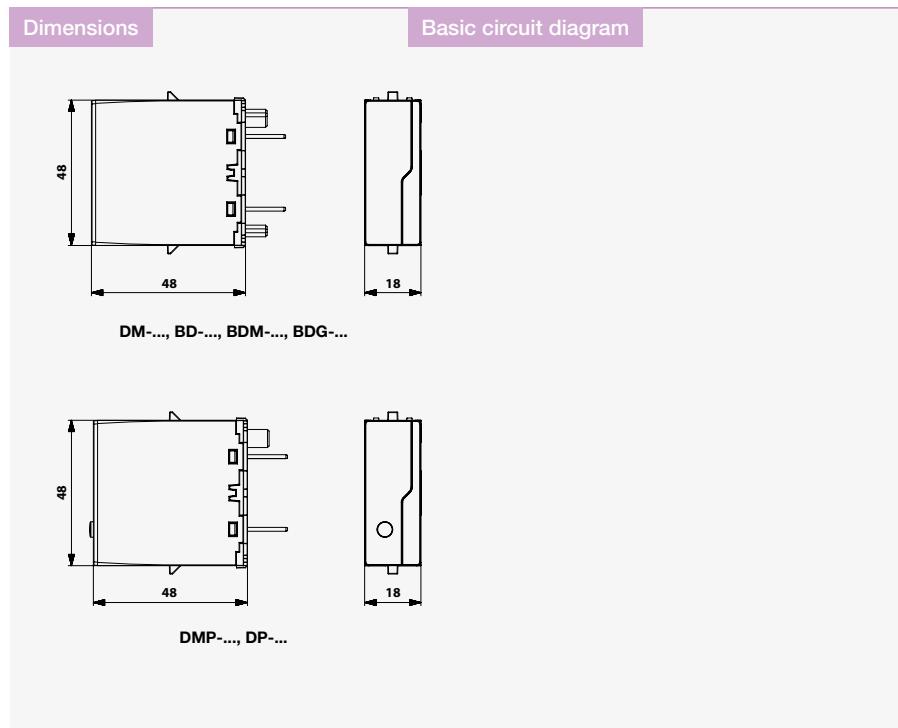

Type	Ordering number
BD-090-T-V/2-0	A05390
BD-250-T-V/2-0	A05391
BDM-006-V/1-0	A05501
BDM-012-V/1-0	A05502
BDM-024-V/1-0	A05503
BDM-048-V/1-0	A05504
BDM-060-V/1-0	A06437
BDM-230-V/1-0	A05505
BDM-006-V/2-0	A06387
BDM-012-V/2-0	A06400
BDM-024-V/2-0	A06413
BDM-048-V/2-0	A06426
BDM-060-V/2-0	A06442
BDM-230-V/2-0	A06463
BDG-006-V/1-0	A05399
BDG-012-V/1-0	A05400
BDG-024-V/1-0	A05401
BDG-048-V/1-0	A05402
BDG-060-V/1-0	A06498

Type	Ordering number
BDG-230-V/1-0	A05403
BDG-006-V/2-0	A06471
BDG-012-V/2-0	A06479
BDG-024-V/2-0	A06487
BDG-048-V/2-0	A06495
BDG-060-V/2-0	A06503
BDG-230-V/2-0	A06516
BDM-006-V/2-J-0	A06389
BDM-012-V/2-J-0	A06402
BDM-024-V/2-J-0	A06415
BDM-048-V/2-J-0	A06428
BDM-006-V/4-J-0	A06395
BDM-012-V/4-J-0	A06408
BDM-024-V/4-J-0	A06421
BDM-048-V/4-J-0	A06434
BDG-006-V/1-4-0	A06466
BDG-012-V/1-4-0	A06474
BDG-024-V/1-4-0	A06482
BDG-048-V/1-4-0	A06490

Type	Ordering number
BDMHF-006-V/1-0	A06543
BDMHF-024-V/1-0	A06549
BDMHF-006-V/1-4-0	A06544
BDMHF-024-V/1-4-0	A06550
BDGHF-006-V/1-0	A06519
BDGHF-012-V/1-0	A06525
BDGHF-024-V/1-0	A06531
BDGHF-230-V/1-0	A06537
BDGHF-006-V/2-0	A06522
BDGHF-012-V/2-0	A06528
BDGHF-024-V/2-0	A06534
BDGHF-230-V/2-0	A06540
DMG-024-V/1-4-0-DIF	A06282
DMP-012-V/1-0	A05814
DMP-024-V/1-0	A05815
DMP-012-V/1-J-0	A05816
DMP-024-V/1-J-0	A05817
DP-012-V/1-0	A05692
DP-024-V/1-0	A05693
DP-048-V/1-0	A05694

SPDs for data / signalling / telecommunication networks

Compact devices



Fixed surge protectors for effective protection of one to four wire lines. These solutions are ideal for applications where the emphasis is on saving space when installing multiple lines and at the same time on high reliability protection.

The BD series includes lightning arresters, the DM series is designed for two to four-wire communication lines, while the DM-PROFIBUS pro-

vides protection for high-speed lines. The DMS series limits passing current, the DP series is designed for low voltage power supplies, and the DPF series integrates an RF filter for protection against high frequency interference.

These solid solutions from SALTEK provide reliable protection and effective surge management for a wide range of applications.


- SPDs with coarse and fine protection
- For 1 up to 4-core lines
- Multiple core lines save the space

- Line BD – lightning current arresters
- Line DM – for 2/3/4-core communication lines
- Line DMS – with current limiting
- Line DP – for extra-low voltage supply
- Line DPF – with integrated RFi filter

Overview of SPDs for data / signalling / telecommunication networks


Compact devices

BD-...-T

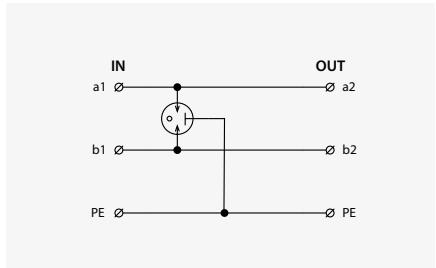


2 core line incoming from LPZ 0 to structure.
See page: 139

DM-...

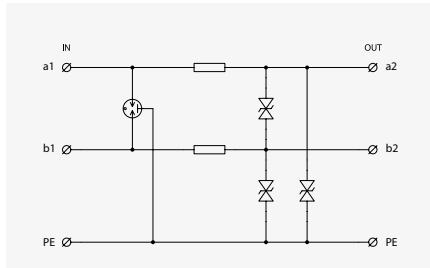


2-3 cores line incoming from LPZ 0 to structure with one-pole connected with ground.
See page: 140-141

DM- .../1 3R(L) DJ

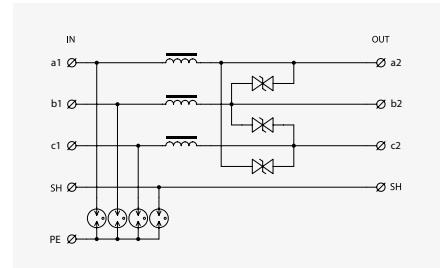


3 core floating line with shielding.
See page: 142-143

DM- .../1 4R DJ

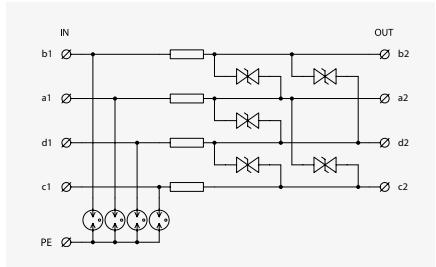


4 core floating line.
See page: 144

DMS-....T

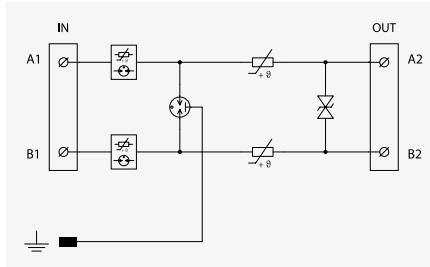


2 core line with current limiting function.
See page: 145

DP-...

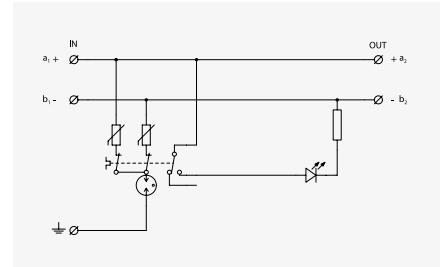

Power supply 12, 24, 48 V up to 16 A.
See page: 147

DPF-...-DC-16(-S)

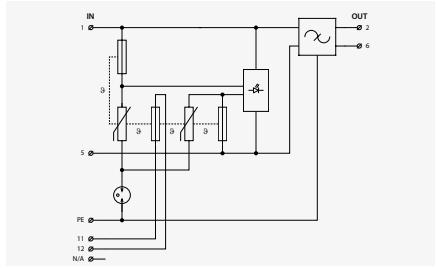


Power supply 24 V up to 6 A with integrated RFI filter.
See page: 148-149

BD-...-T

Lightning current arresters, compact ST1 compact device

- lightning current arrester of 2-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- mainly for protection of telecommunication lines against surge voltage

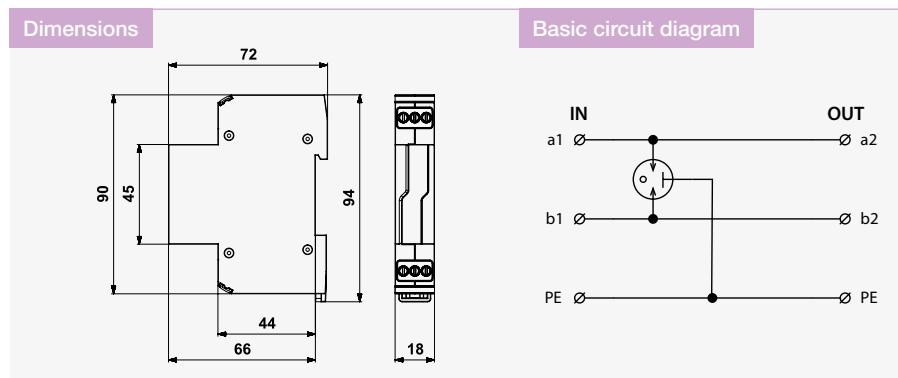


Parameter / Type	BD-090-T	BD-250-T
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 1	ST 1
Maximum operating voltage	U_c	50 V AC / 70 V DC
Nominal load current	I_L	1,6 A
C2 nominal discharge current (8/20 μ s) per core	I_n	10 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total}	20 kA
D1 impulse discharge current (10/350 μ s) core-core	I_{imp}	2,5 kA
D1 total discharge current (10/350 μ s) cores-PE	I_{Total}	5 kA
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p	550 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p	550 V
Response time core-core	t_a	100 ns
Response time core-PE	t_a	100 ns
Threshold frequency core-core	f	120 MHz
Cross-section of connected conductors solid (min/max)		6 mm ²
Cross-section of connected conductors stranded (min/max)		6 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / D1, C2	
Ordering number	A05821	A05822

DM-.../1-R-DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

Product features

- coarse and fine surge protection for 2-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security
- and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

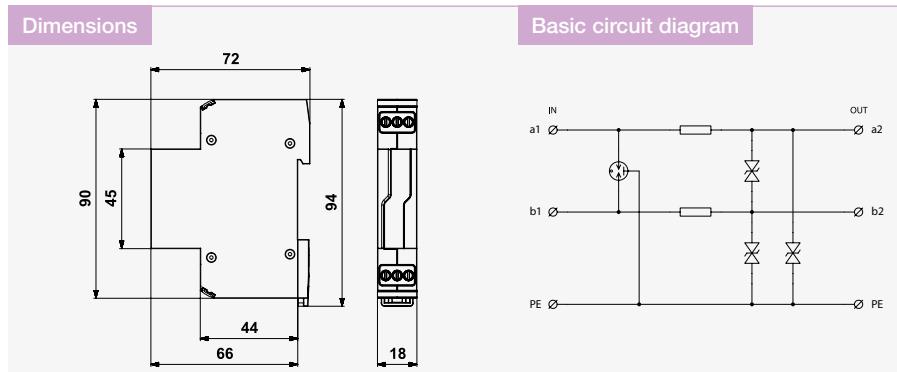

Parameter / Type	DM-006/1-R-DJ	DM-012/1-R-DJ	DM-024/1-R-DJ	DM-048/1-R-DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	35,6 V AC / 50,2 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	10 kA	10 kA	10 kA	10 kA
C2 voltage protection level mode core-core at I_n U_p	25 V	35 V	50 V	70 V
C2 voltage protection level mode core-PE at I_n U_p	25 V	35 V	75 V	95 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	15 V	25 V	50 V	70 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	15 V	25 V	50 V	70 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1 Ω	1 Ω	1 Ω	1 Ω
Threshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (max)	4 mm ²	4 mm ²	4 mm ²	4 mm ²
Cross-section of connected conductors stranded (max)	4 mm ²	4 mm ²	4 mm ²	4 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / B2, C1, C2, C3			
Ordering number	A06726	A06727	A06728	A06729

ezū

ezū

ezū

ezū


DM-.../1-L2-DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (L – inductance)

- coarse and fine surge protection for 2-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security

and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

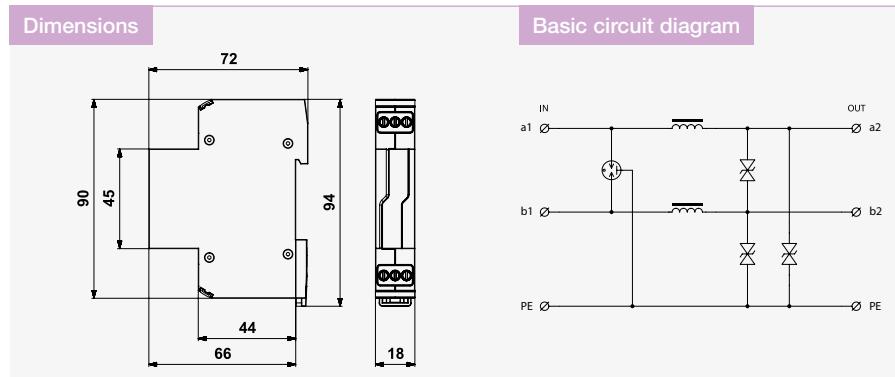

Parameter / Type	DM-012/1-L2-DJ	DM-024/1-L2-DJ	DM-048/1-L2-DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 12 V DC	U_n 24 V DC	U_n 48 V DC
Maximum operating voltage	U_c 11 V AC / 16 V DC	U_c 25 V AC / 36 V DC	U_c 36 V AC / 51 V DC
Nominal load current	I_L 2 A	I_L 2 A	I_L 2 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 35 V	U_p 75 V	U_p 95 V
C2 voltage protection level mode core-PE at I_n	U_p 35 V	U_p 75 V	U_p 95 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 25 V	U_p 50 V	U_p 70 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 25 V	U_p 50 V	U_p 70 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial inductance per core	L 100 mH	L 100 mH	L 100 mH
Threshold frequency core-core	f 150 kHz	f 150 kHz	f 150 kHz
Cross-section of connected conductors solid (max)	4 mm ²	4 mm ²	4 mm ²
Cross-section of connected conductors stranded (max)	4 mm ²	4 mm ²	4 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / B2, C1, C2, C3		
Ordering number	A06731	A06732	A06733

ezū

ezū

ezū


DM-.../1 3R DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

- coarse and fine surge protection for 3-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

(mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

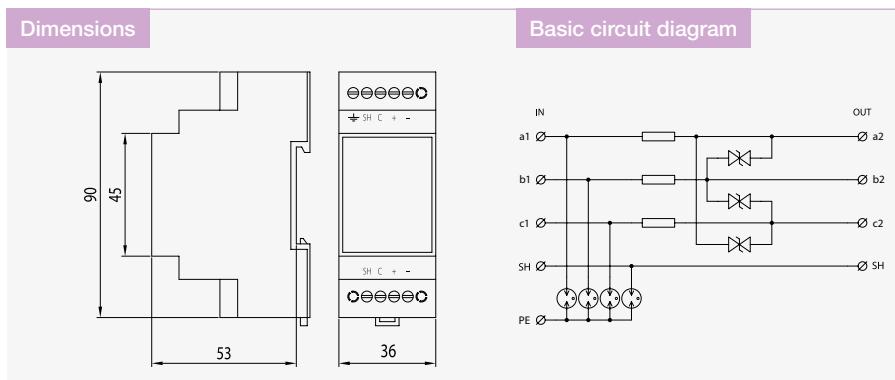

Parameter/Type	DM-006/1 3R DJ	DM-012/1 3R DJ	DM-024/1 3R DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	U_c 10,2 V AC / 14,5 V DC	U_c 20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,06 A	I_L 0,06 A	I_L 0,06 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	U_p 35 V	U_p 50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 20 V	U_p 40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	U_p 650 V	U_p 650 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial resistance per core	R 6,8 Ω	R 6,8 Ω	R 6,8 Ω
Treshold frequency core-core	f 1 MHz	f 1,7 MHz	f 3,4 MHz
Cross-section of connected conductors solid (min/max)	4 mm ²	4 mm ²	4 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ²	2,5 mm ²	2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01350	A01349	A01234


DM-.../1 3L DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (L – inductance)

- coarse and fine surge protection for 3-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

(mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

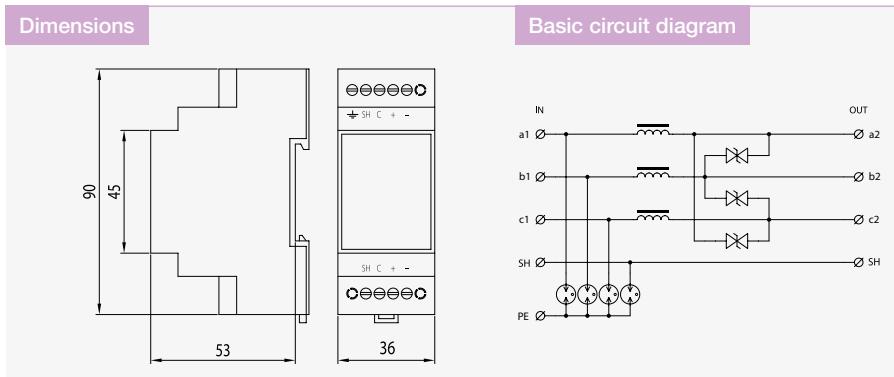

Parameter/Type	DM-006/1 3L DJ	DM-012/1 3L DJ	DM-024/1 3L DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	U_n 12 V DC	U_n 24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	U_c 10,2 V AC / 14,5 V DC	U_c 20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,37 A	I_L 0,37 A	I_L 0,37 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	I_n 10 kA	I_n 10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	U_p 35 V	U_p 50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	U_p 350 V	U_p 350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	U_p 20 V	U_p 40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	U_p 650 V	U_p 650 V
Response time core-core	t_a 1 ns	t_a 1 ns	t_a 1 ns
Response time core-PE	t_a 100 ns	t_a 100 ns	t_a 100 ns
Serial inductance per core	L 100 μ H	L 100 μ H	L 100 μ H
Threshold frequency core-core	f 0,16 MHz	f 0,16 MHz	f 0,16 MHz
Cross-section of connected conductors solid (min/max)	4 mm ²	4 mm ²	4 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ²	2,5 mm ²	2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01402	A02094	A01519


DM-.../1 4R DJ

Coarse and fine surge protection for telecommunications and signalling network, compact ST2+3 coupling impedance (R – resistance)

- coarse and fine surge protection for 4-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc.

(mainly for RS-485 interfaces) against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

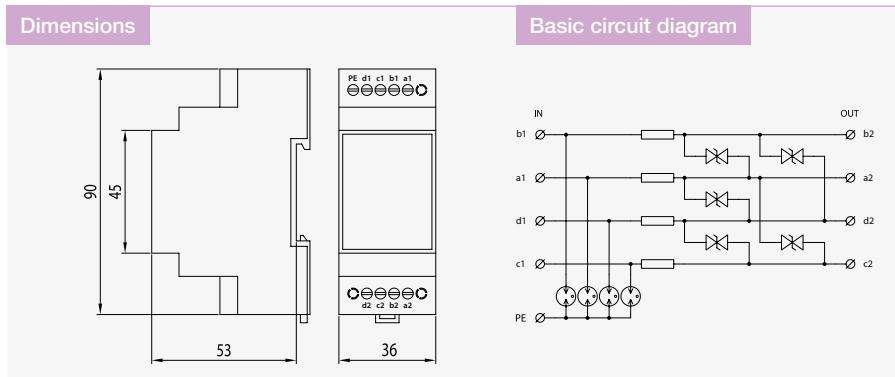

Parameter / Type	DM-006/1 4R DJ	DM-012/1 4R DJ	DM-024/1 4R DJ
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 6 V DC	12 V DC	24 V DC
Maximum operating voltage	U_c 5,7 V AC / 8,1 V DC	10,2 V AC / 14,5 V DC	20,6 V AC / 29,1 V DC
Nominal load current	I_L 0,06 A	0,06 A	0,06 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	10 kA	10 kA
C2 voltage protection level mode core-core at I_n	U_p 25 V	35 V	50 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	20 V	40 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 650 V	650 V	650 V
Response time core-core	t_a 1 ns	1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns	100 ns
Serial resistance per core	R 6,8 Ω	6,8 Ω	6,8 Ω
Treshold frequency core-core	f 1 MHz	1,7 MHz	3,4 MHz
Cross-section of connected conductors solid (min/max)	4 mm ²	4 mm ²	4 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ²	2,5 mm ²	2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A01675	A01689	A01357


DMS-...-T

Special surge protection with limiting current coupling impedance (resistance)

- special two-stage surge protection of 2-core signalling line with current limiting
- installation close to protected equipment
- for protection of communication interfaces, mainly the measuring loops, of I&C, electronic security and fire

detection systems, etc. against surge voltage where are long parallel lines with power network

- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)


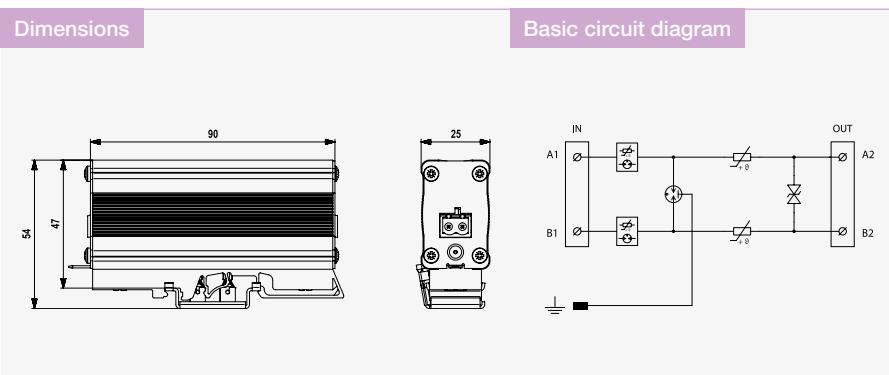


Parameter / Type	DMS-024-T	DMS-048-T
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	24 V DC	48 V DC
Maximum operating voltage U_c	25 V AC / 33 V DC	39 V AC / 56 V DC
Nominal load current I_L	0,06 A	0,06 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA
C2 voltage protection level mode core-core at I_n U_p	75 V	110 V
C2 voltage protection level mode core-PE at I_n U_p	500 V	500 V
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Serial resistance per core R	13 Ω	13 Ω
Threshold frequency core-core f	1,1 MHz	2,0 MHz
Cross-section of connected conductors solid (min/max)	2,5 mm ²	2,5 mm ²
Cross-section of connected conductors stranded (min/max)	2,5 mm ²	2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2	
Ordering number	A06596	A06597

DL-RS DD9

Surge protection for RS interfaces (with DSUB connectors)
DSUB 9 connectors

- fine protection
- for protection of serial ports of computers and control systems of I&C, electronic security and fire detection systems, etc. against impact of surge voltage

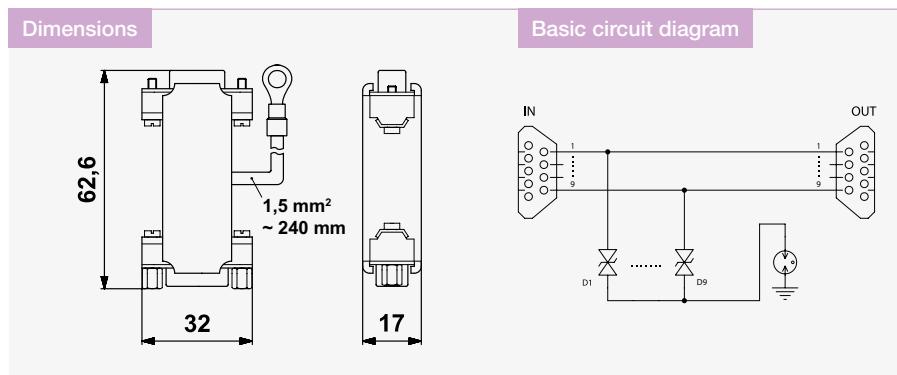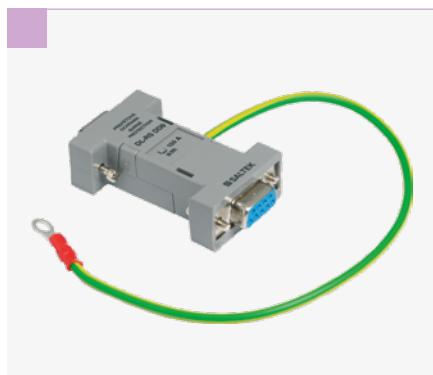


Parameter / Type	DL-RS DD9
Location of SPD	ST 3
Maximum operating voltage	U_c 12,7 V AC / 18 V DC
C1 nominal discharge current (8/20 μ s) per core	I_n 150 A
C1 voltage protection level mode core-core at I_n	U_p 65 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 50 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 980 V
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Threshold frequency core-core	f 55 MHz
Connection (input - output)	female DSUB 9 - male DSUB 9
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C1,C3
Ordering number	A00968

DP-...-25

Surge protection for ELV power supply networks, compact version
visual fault signalling

- surge protection for all types of LV electric and electronic equipments against surge voltage
- installation to ELV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages

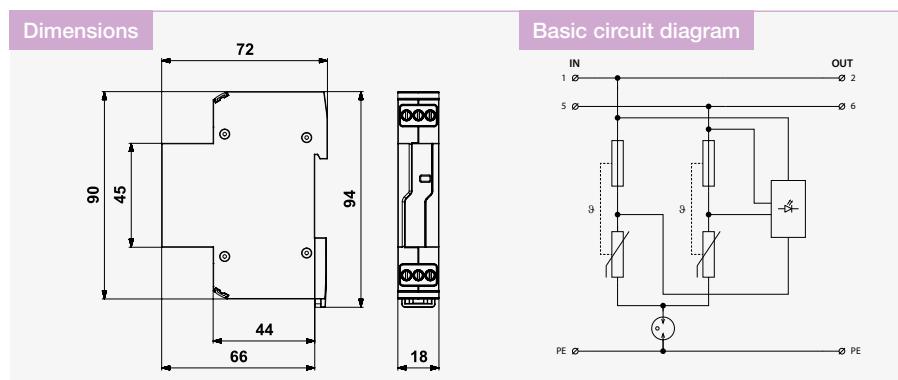


Parameter / Type	DP-012-25	DP-024-25	DP-048-25
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 2	ST 2
Nominal voltage	U_n	12 V AC	24 V AC
Maximum operating voltage	U_c	20 V AC / 20 V DC	36 V AC / 36 V DC
Nominal load current	I_L	25 A	25 A
C2 nominal discharge current (8/20 μ s) per core	I_n	2 kA	2 kA
C2 voltage protection level mode core-core at I_n	U_p	180 V	230 V
C2 voltage protection level mode core-PE at I_n	U_p	550 V	550 V
Test voltage L+ - L-		4 kV	4 kV
Test voltage L+(L-) - PE		4 kV	4 kV
Voltage protection level L+ - L-		0,18 kV	0,23 kV
Maximum overcurrent protection	25 A gL/gG or C 25 A	25 A gL/gG or C 25 A	25 A gL/gG or C 25 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
Cross-section of connected conductors solid (min/max)	6 mm ²	6 mm ²	6 mm ²
Cross-section of connected conductors stranded (min/max)	6 mm ²	6 mm ²	6 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06096	A06097	A06098

DPF-...DC-16

Surge protection for ELV power supply networks, with RFi filter
visual fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of control systems, electronic security and fire systems against impact of transient overvoltage and RF disturbance
- for AC or DC power supply

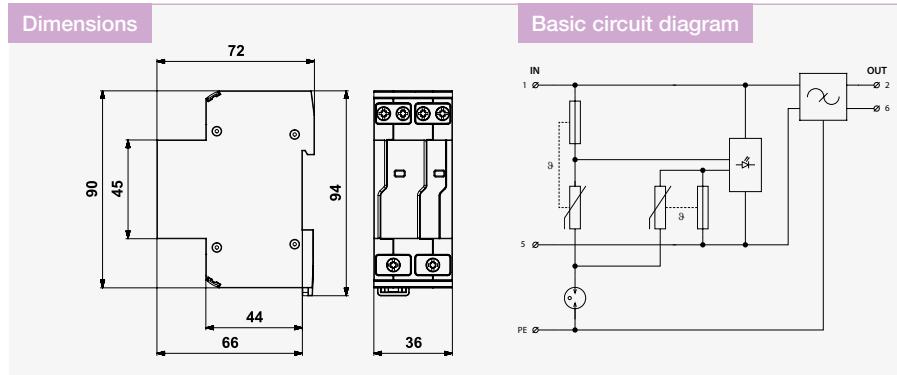

Parameter/Type	DPF-012DC-16	DPF-024DC-16	DPF-048DC-16
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Nominal voltage U_n	12 V AC	24 V AC	48 V AC
Maximum operating voltage U_c	20 V AC / 20 V DC	34 V AC / 34 V DC	60 V AC / 60 V DC
Nominal load current I_L	16 A	16 A	16 A
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-)-PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,25 kV	0,29 kV	0,42 kV
Voltage protection level L+(L-)-PE	0,5 kV	0,5 kV	0,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-)-PE	100 ns	100 ns	100 ns
RFi filter	yes	yes	yes
Filter attenuation at 1MHz (50 Ω/50 Ω) symmetrical	45 dB	45 dB	45 dB
Filter attenuation at 1MHz (50 Ω/50 Ω) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	6 mm ²	6 mm ²	6 mm ²
Cross-section of connected conductors stranded (min/max)	6 mm ²	6 mm ²	6 mm ²
Fault indication	red indicator	red indicator	red indicator
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06635	A06636	A06637

ezú


ezú

ezú

DPF-...DC-16-S


Surge protection for ELV power supply networks, with RFi filter
visual and remote fault signalling

- surge protection with integrated RFi filter
- installation to LV installations, close to protected equipment
- for protection of control systems, electronic security and fire systems against impact of transient overvoltage and RF disturbance
- for AC or DC power supply

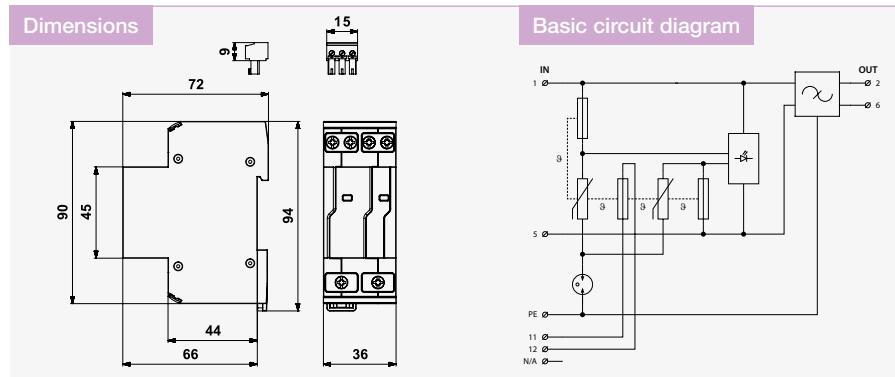


Parameter / Type	DPF-012DC-16-S	DPF-024DC-16-S	DPF-048DC-16-S
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Nominal voltage	U_n 12 V AC	24 V AC	48 V AC
Maximum operating voltage	U_c 20 V AC / 20 V DC	34 V AC / 34 V DC	60 V AC / 60 V DC
Nominal load current	I_L 16 A	16 A	16 A
Test voltage L+ - L-	4 kV	4 kV	4 kV
Test voltage L+(L-) - PE	4 kV	4 kV	4 kV
Voltage protection level L+ - L-	0,25 kV	0,29 kV	0,42 kV
Voltage protection level L+(L-) - PE	0,5 kV	0,5 kV	0,5 kV
Maximum overcurrent protection	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A	16 A gL/gG or C 16 A
Response time L+ - L-	25 ns	25 ns	25 ns
Response time L+(L-) - PE	100 ns	100 ns	100 ns
RFi filter	yes	yes	yes
Filter attenuation at 1MHz (50 Ω/50 Ω) symmetrical	45 dB	45 dB	45 dB
Filter attenuation at 1MHz (50 Ω/50 Ω) unsymmetrical	30 dB	30 dB	30 dB
Cross-section of connected conductors solid (min/max)	6 mm ²	6 mm ²	6 mm ²
Cross-section of connected conductors stranded (min/max)	6 mm ²	6 mm ²	6 mm ²
Fault indication	red indicator	red indicator	red indicator
Remote indication	potential-free open contact	potential-free open contact	potential-free open contact
Remote indication contacts	230 V / 0,5 A AC, 24 V / 0,5 A DC	230 V / 0,5 A AC, 24 V / 0,5 A DC	230 V / 0,5 A AC, 24 V / 0,5 A DC
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-11:2012, IEC 61643-11:2011 / T3		
Ordering number	A06664	A06665	A06666

Notes

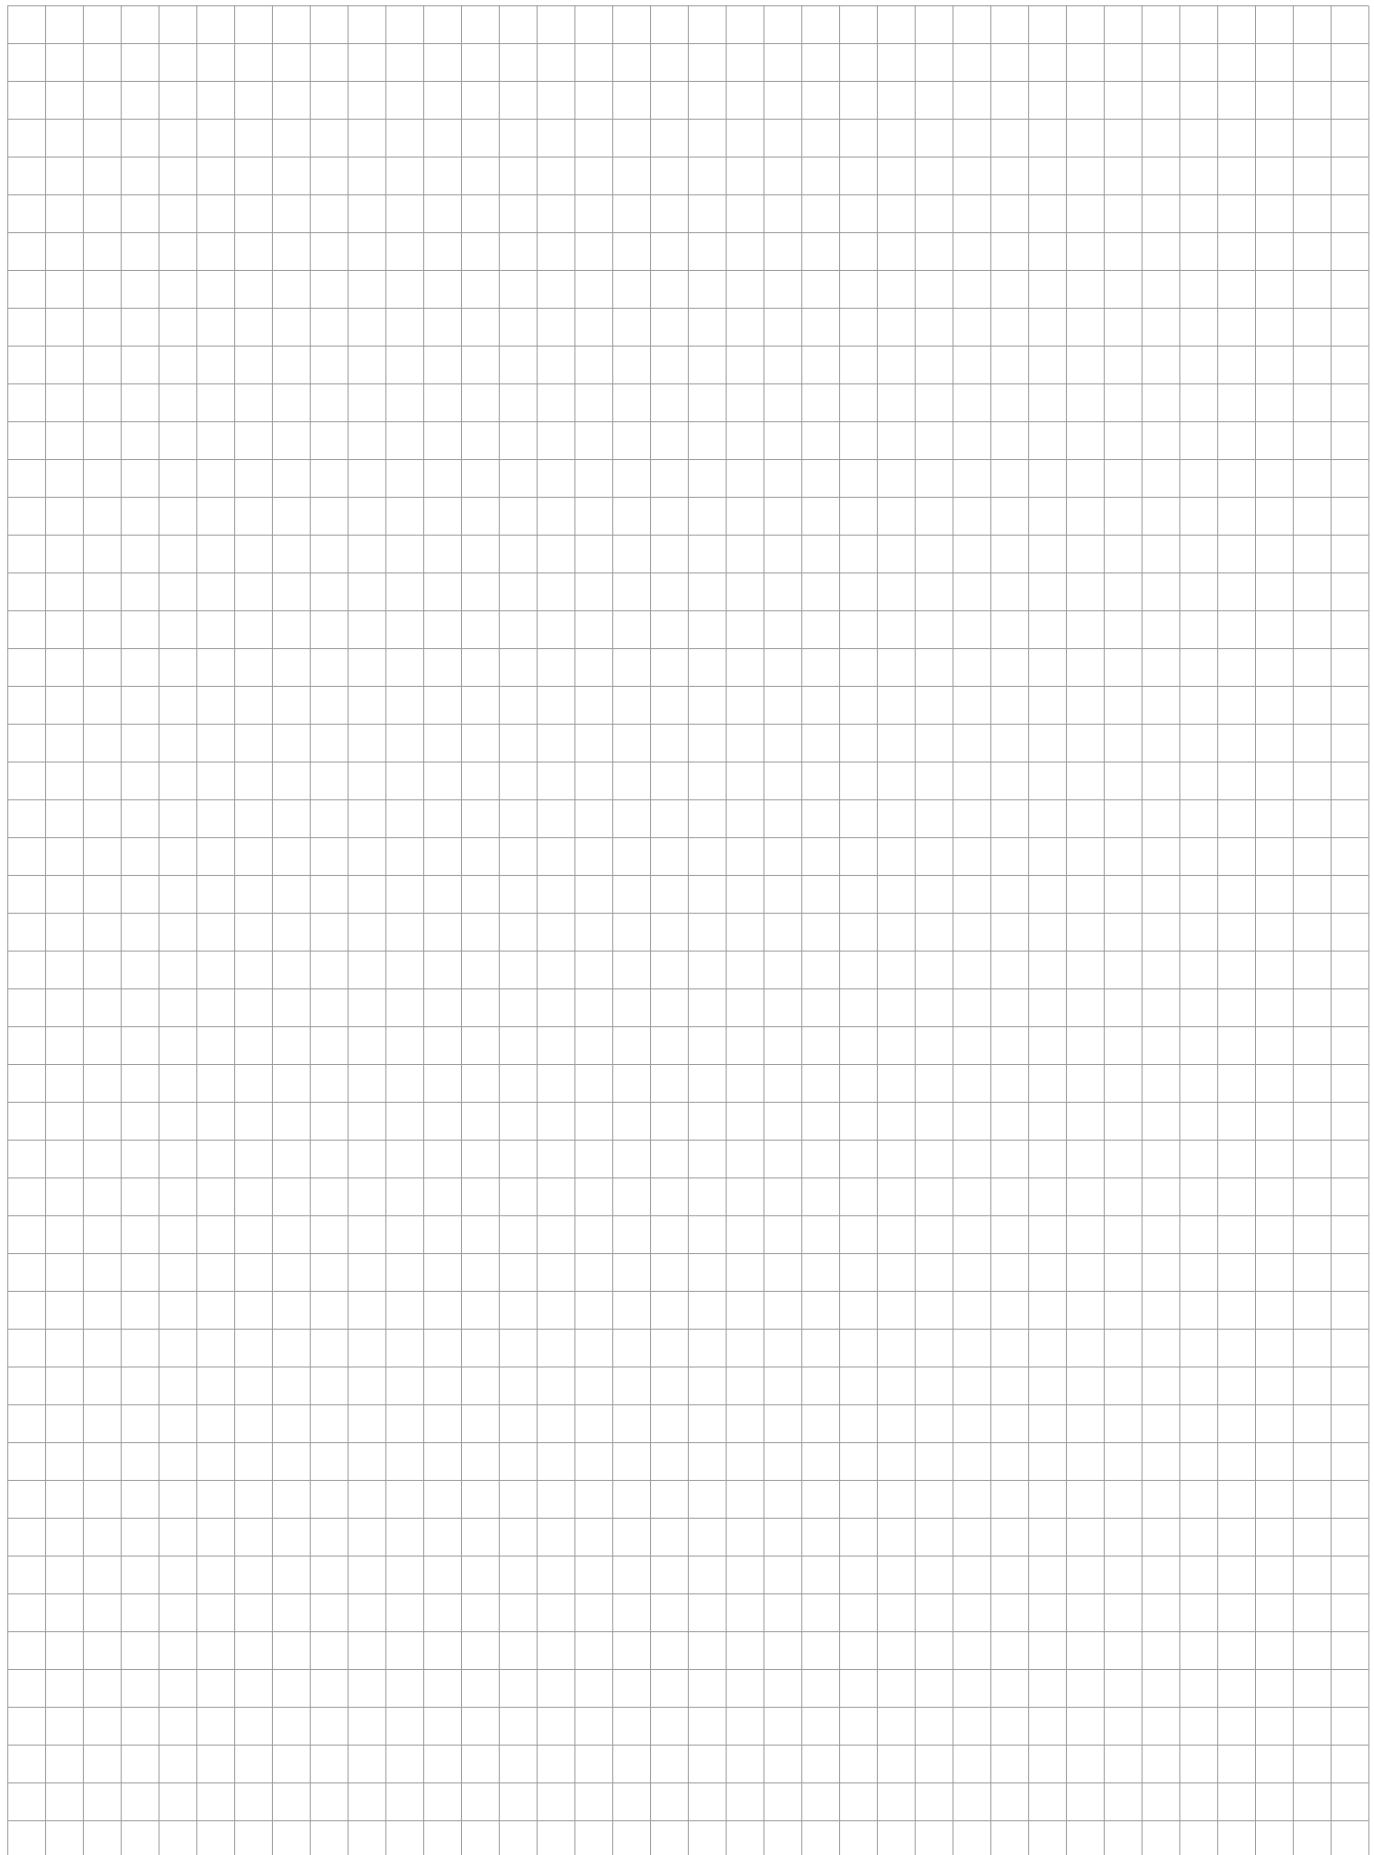

SPDs for data / signalling / telecommunication networks

Terminal blocks with screw terminals

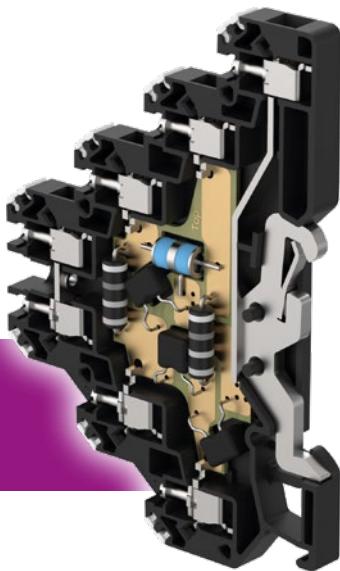

Screw series clamps for effective protection of single and double wire lines against overvoltage. These clamps provide high reliability and connection strength while saving space when installing multiple lines.

The DM series is designed for two to four wire communication lines, the DMG separates signal and protective earth, the DMJ is suitable for sin-

gle wire lines with a common ground, and DMHF provides protection for high-speed lines. For high frequency interference applications, the DMLF series is ideal, while the DS series offers single-stage protection.

SALTEK screw terminals provide a reliable and durable solution for protecting communication and data systems.


- SPDs with coarse and fine protection
- For single and two-core lines
- Multiple core lines significantly save the space
- Direct grounding via DIN rail clip

- Line DM – for 2/3/4-core communication lines
- Line DMG – with separated signal ground and protective earth
- Line DMJ – for 1-core lines with common ground
- Line DMHF – for high-speed lines
- Line DMLF – with protection against RF disturbance
- Line DS – single-stage protection

Overview of SPDs for data / signalling / telecommunication networks


Terminal blocks with screw terminals

DM-.../1-RS

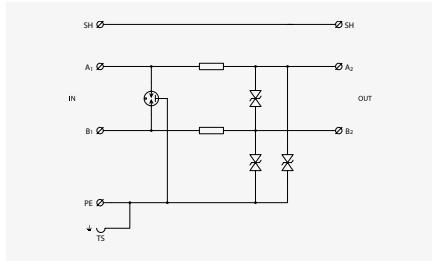


2/3-core line with one pole connected to common ground.
See page: 153

DMG-.../1-RS

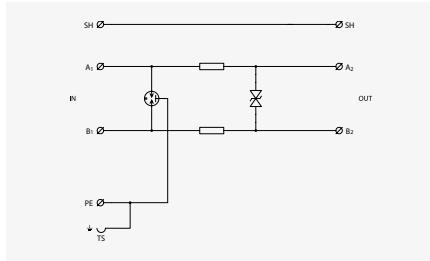


2-core floating line.
See page: 154

DMJ-.../2-RS

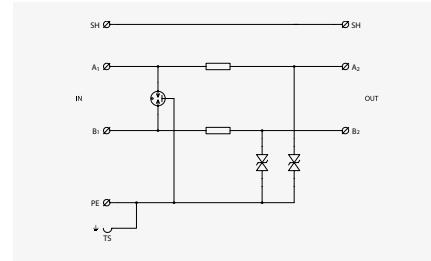


Two single-core lines with common ground.
See page: 155

DMHF-.../1-RS

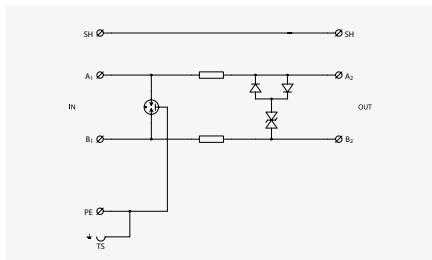


2-core high-speed floating line.
See page: 156

DMLF-.../1-RS

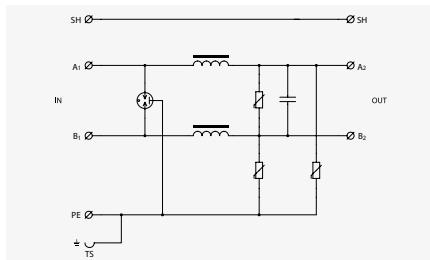


2-core low-frequency line.
See page: 157

DS-B...-RS

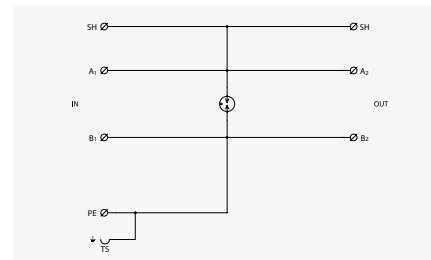


Single stage protection of 2-core line.
See page: 158

DS-D...-RS

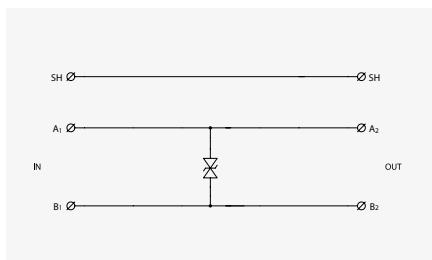

Single stage protection of 2-core line.
See page: 158

DS-V...-RS

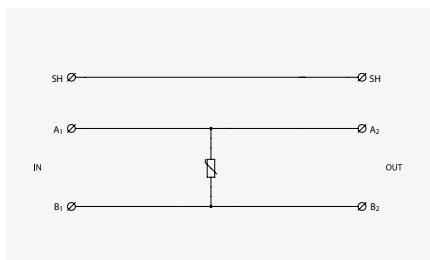


Single stage protection of 2-core line.
See page: 158

DM-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

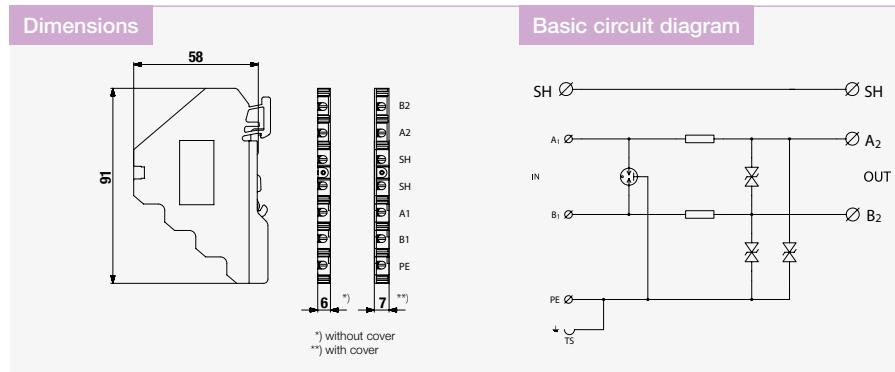

Parameter / Type	DM-006/1-RS	DM-012/1-RS	DM-024/1-RS	DM-048/1-RS	DM-060/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n U_p	18 V	28 V	50 V	80 V	100 V
C2 voltage protection level mode core-PE at I_n U_p	30 V	40 V	65 V	95 V	120 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	20 V	45 V	65 V	85 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	15 V	20 V	45 V	65 V	85 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3				
Ordering number	A05140	A05141	A05142	A05143	A05129


DMG-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and measuring lines of I&C, electronic security and fire detection

systems, etc. against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

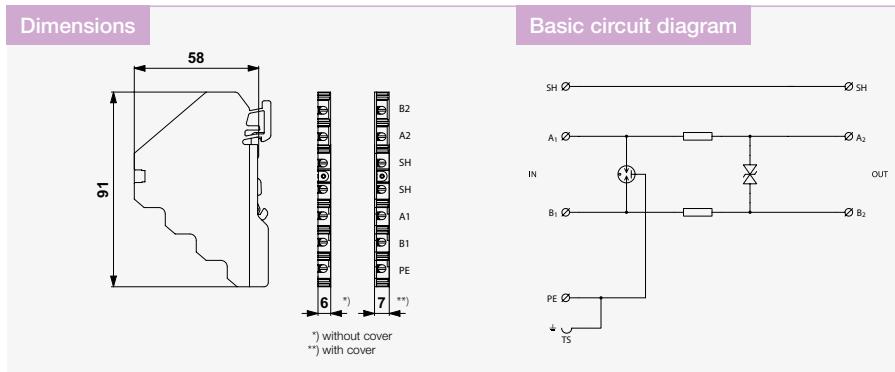


Parameter / Type	DMG-006/1-RS	DMG-012/1-RS	DMG-024/1-RS	DMG-048/1-RS	DMG-060/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 18 V	28 V	50 V	80 V	100 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V	350 V	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	20 V	45 V	65 V	85 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V	500 V	500 V	500 V
Response time core-core	t_a 1 ns	1 ns	1 ns	1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns	100 ns	100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core	f 1 MHz	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3				
Ordering number	A05132	A05133	A05134	A05135	A05136

DMJ-.../2-RS

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screw terminals

- coarse and fine surge protection for two 1-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and control circuits of I&C,

- electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in common mode (core – PE)

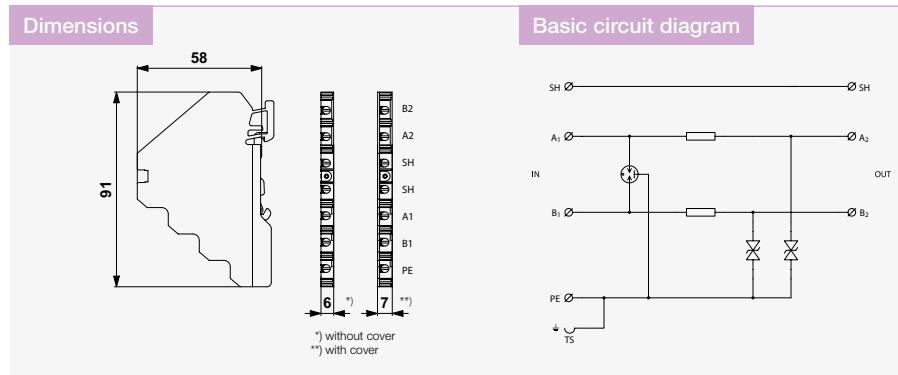



Parameter / Type	DMJ-012/2-RS	DMJ-024/2-RS	DMJ-048/2-RS	DMJ-060/2-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	12 V DC	24 V DC	48 V DC	60 V DC
Maximum operating voltage U_c	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC	45 V AC / 64 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	40 V	65 V	95 V	120 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	20 V	45 V	65 V	85 V
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core f	2 MHz	4 MHz	5 MHz	6,5 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3			
Ordering number	A05144	A05145	A05131	A05146

DMHF-.../1-RS

Surge protection for industrial communication bus (eg. PROFIBUS)
coupling impedance (resistance), screw terminals

- coarse and fine surge protection of 2-core high-speed signalling lines
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire

- detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)

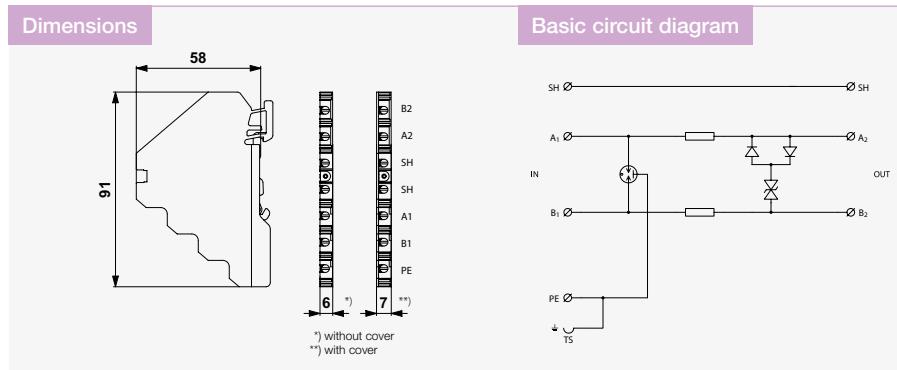
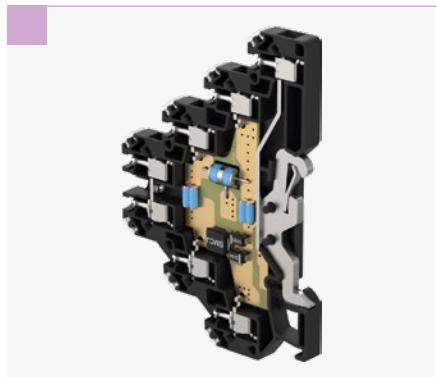


Parameter / Type	DMHF-006/1-RS	DMHF-015/1-RS
Connection (input - output)	terminals-terminals	terminals-terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	15 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	15 V AC / 22 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 26 V	36 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	28 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V
Response time core-core	t_a 1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω
Threshold frequency core-core	f 70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A05138	A05139

DMLF-.../1-RS

Coarse and fine surge protection for telecommunications and signalling network with limiting Radio-frequency interference coupling impedance (inductance), screw terminals

- coarse and fine surge protection for low-frequency 2-core signalling networks
- installation close to protected equipment
- for protection of analogue measuring lines in the areas with RF disturbance
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

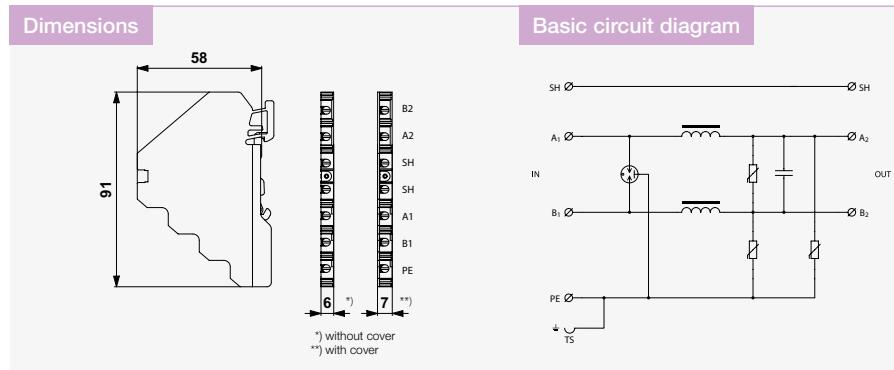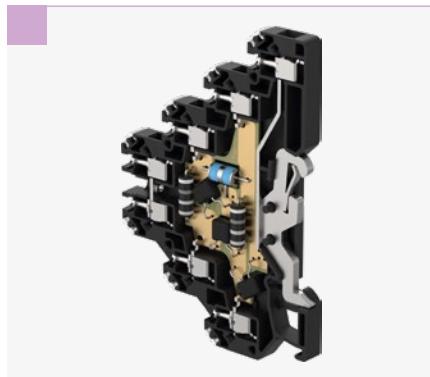

Parameter / Type	DMLF-024/1-RS
Connection (input - output)	terminals-terminals
Location of SPD	ST 2
Nominal voltage U_n	24 V DC
Maximum operating voltage U_c	31 V DC
Nominal load current I_L	0,1 A
C2 nominal discharge current (8/20 μ s) per core	5 kA
C2 total discharge current (8/20 μ s) cores-PE	10 kA
D1 impulse discharge current (10/350 μ s) per core	0,5 kA
C2 voltage protection level mode core-core at I_n	65 V
C2 voltage protection level mode core-PE at I_n	80 V
C3 voltage protection level mode core-core at 1 kV/ μ s	55 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	55 V
Response time core-core	25 ns
Response time core-PE	25 ns
Threshold frequency core-core	0,07 MHz
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A05333

DS-...-RS

Single stage surge arrester in terminal block



B – Gas Discharge Tube, V – varistors, D – fast suppressor diodes, screw terminal

- coarse single stage surge arrester (B),
single stage surge arrester (V),
fine single stage surge protection (D)
- for protection of signalling, data and
other lines against impact of surge
voltage

- version DS-B is usable mainly for
the separation of shielding from
the protective earth



Dimensions



Basic circuit diagram

Basic circuit diagrams on page 152

Parameter / Type	DS-B090-RS	DS-D024-RS	DS-V130-RS
Connection (input - output)	terminals-terminals	terminals-terminals	terminals-terminals
Location of SPD	ST 2	ST 3	ST 2
Maximum operating voltage	U_c 50 V AC / 70 V DC	20,6 V AC / 29,1 V DC	140 V AC / 180 V DC
Nominal load current	I_L 16 A	16 A	16 A
C2 nominal discharge current (8/20 μ s) per core	I_n 10 kA	0,3 kA	6 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	-	-
C2 voltage protection level mode core-PE at I_n	U_p -	48 V	530 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 550 V	-	-
Response time core-PE	t_a 100 ns	1 ns	25 ns
Cross-section of connected conductors solid (min/max)	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²	0,14 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²	0,14 mm ² / 2,5 mm ²
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A05148	A05153	A05151

SPDs for data / signalling / telecommunication networks

Terminal blocks with screwless terminals

SALTEK provides an effective solution to protect single and double core lines through boltless series clamps. These protectors offer easy installation, space saving and reliable surge protection.

The DM series is designed for two- to four-wire lines, DMG separates signal and protective earth, DMJ is suitable for single-wire lines with common earth, and DMHF protects high-speed

- SPDs with coarse and fine protection
- For single and two-core lines
- Multiple core lines significantly save the space
- Screwless terminals for easy connection



lines. The DMLF series is available for RF interference protection, while the DS series offers single-stage protection.


The screwless terminals make these products ideal for modern communication and data systems where ease of operation and maximum reliability are key.

- Line DM – for 2/3/4-core communication lines
- Line DMG – with separated signal ground and protective earth
- Line DMJ – for 1-core lines with common ground
- Line DMHF – for high-speed lines
- Line DMLF – with protection against RF disturbance
- Line DS – single-stage protection

Overview of SPDs for data / signalling / telecommunication networks


Terminal blocks with screwless terminals

DM-.../1-RB

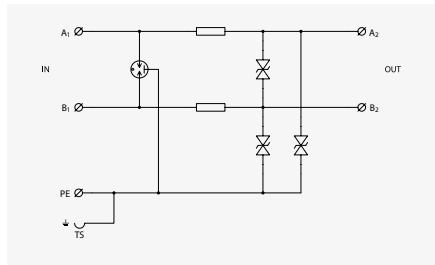


2-core line with one pole connected to common ground.
See page: 161

DMG-.../1-RB

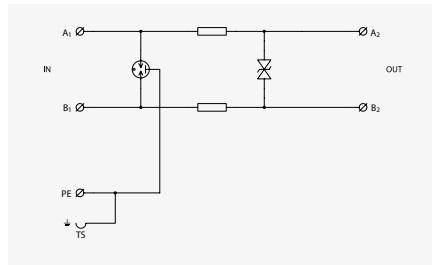


2-core floating line.
See page: 162

DMJ-.../2-RB

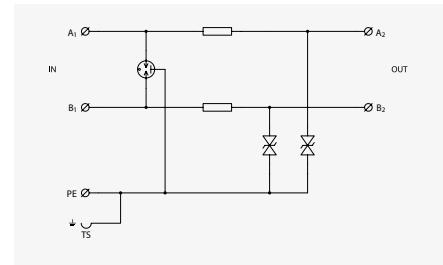


Two single-core lines with common ground.
See page: 163

DMHF-006/1-RB

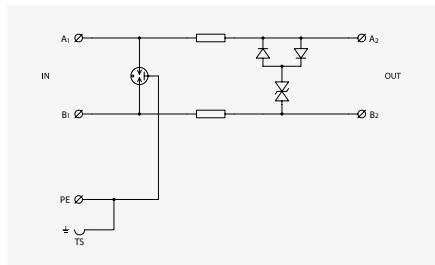


2-core high-speed floating line.
See page: 164

DMLF-024/1-RB

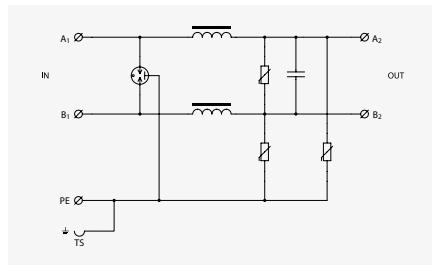

2-core low-frequency line.
See page: 165

DS-B090-RB

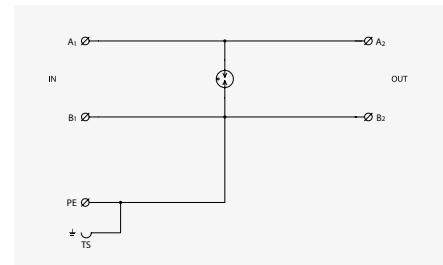


Single stage protection of 2-core line.
See page: 166

DM-.../1-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

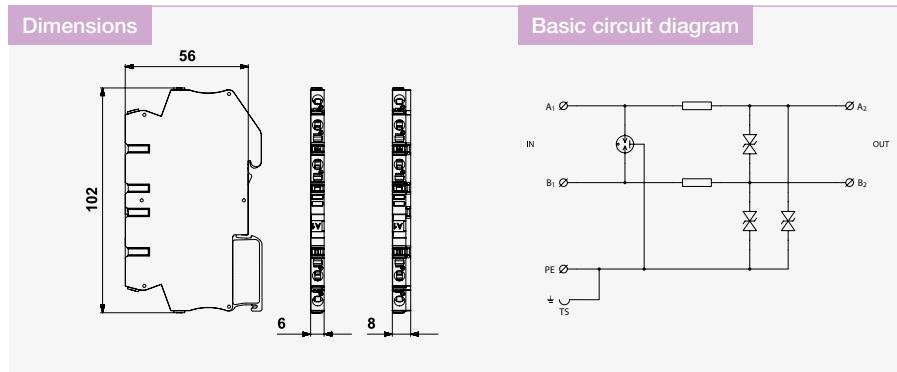

Parameter / Type	DM-006/1-RB	DM-012/1-RB	DM-024/1-RB	DM-048/1-RB
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	12 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	11 V AC / 16 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core I_n	5 kA	5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE I_{Total}	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core I_{imp}	0,5 kA	0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n U_p	18 V	28 V	50 V	80 V
C2 voltage protection level mode core-PE at I_n U_p	30 V	40 V	65 V	95 V
C3 voltage protection level mode core-core at 1 kV/ μ s U_p	12 V	20 V	45 V	65 V
C3 voltage protection level mode core-PE at 1 kV/ μ s U_p	15 V	20 V	45 V	65 V
Response time core-core t_a	1 ns	1 ns	1 ns	1 ns
Response time core-PE t_a	1 ns	1 ns	1 ns	1 ns
Serial resistance per core R	1,6 Ω	1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core f	1 MHz	2 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3			
Ordering number	A06057	A06058	A06059	A06060



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type

197


DMG-.../1-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for 2-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and measuring lines of I&C, electronic security and fire detection

systems, etc. against impact of surge voltage

- coarse and fine surge protection in differential mode (core – core) and coarse protection in common mode (core – PE)

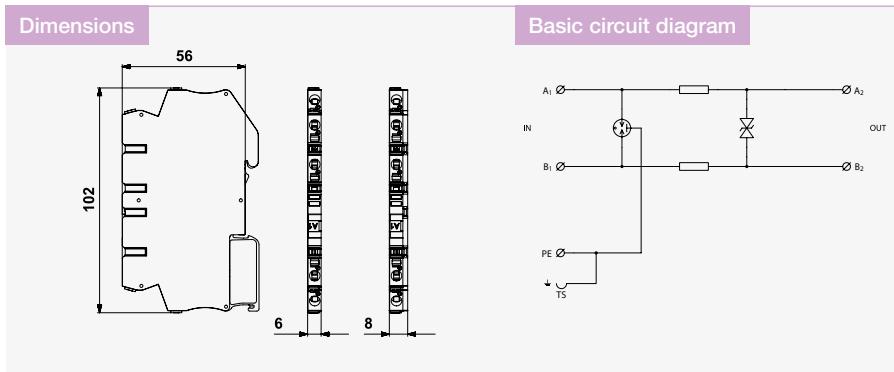

Parameter/Type	DMG-006/1-RB	DMG-024/1-RB	DMG-048/1-RB
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	24 V DC	48 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	25 V AC / 36 V DC	36 V AC / 51 V DC
Nominal load current I_L	0,5 A	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 18 V	50 V	80 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 12 V	45 V	65 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V	500 V
Response time core-core	t_a 1 ns	1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω	1,6 Ω
Threshold frequency core-core	f 1 MHz	4 MHz	5 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A06061	A06062	A06063



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type

197


DMJ-.../2-RB

Coarse and fine surge protection for telecommunications and signalling network, ST2+3 in terminal block coupling impedance (resistance), screwless terminals

- coarse and fine surge protection for two 1-core signalling networks
- installation close to protected equipment
- for protection of communication interfaces and control circuits of I&C,

electronic security and fire detection systems, etc. against impact of surge voltage

- coarse and fine surge protection in common mode (core – PE)

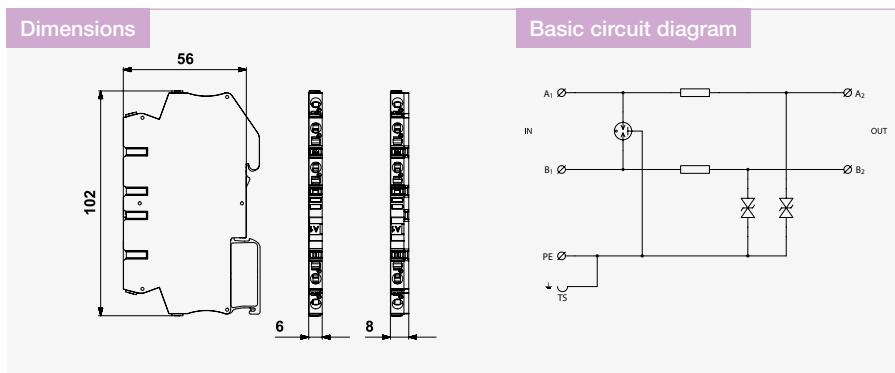

Parameter / Type	DMJ-012/2-RB	DMJ-024/2-RB	DMJ-048/2-RB
Connection (input - output)	screwless terminals	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3	ST 2+3
Nominal voltage	U_n 12 V DC	U_n 24 V DC	U_n 48 V DC
Maximum operating voltage	U_c 11 V AC / 16 V DC	U_c 25 V AC / 36 V DC	U_c 36 V AC / 51 V DC
Nominal load current	I_L 0,5 A	I_L 0,5 A	I_L 0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	I_n 5 kA	I_n 5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	I_{Total} 10 kA	I_{Total} 10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	I_{imp} 0,5 kA	I_{imp} 0,5 kA
C2 voltage protection level mode core-PE at I_n	U_p 40 V	U_p 65 V	U_p 95 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 20 V	U_p 45 V	U_p 65 V
Response time core-PE	t_a 1 ns	t_a 1 ns	t_a 1 ns
Serial resistance per core	R 1,6 Ω	R 1,6 Ω	R 1,6 Ω
Treshold frequency core-core	f 2 MHz	f 4 MHz	f 5 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3		
Ordering number	A06065	A06066	A06067



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type


197

DMHF-0../1-RB

Surge protection for industrial communication bus (eg. PROFIBUS)
coupling impedance (resistance), screwless terminals

- coarse and fine surge protection of 2-core high-speed signalling lines
- installation close to protected equipment
- for protection of communication interfaces, mainly the RS-485 lines, of I&C, electronic security and fire

- detection systems, etc. against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and coarse surge protection in common mode (core – PE)

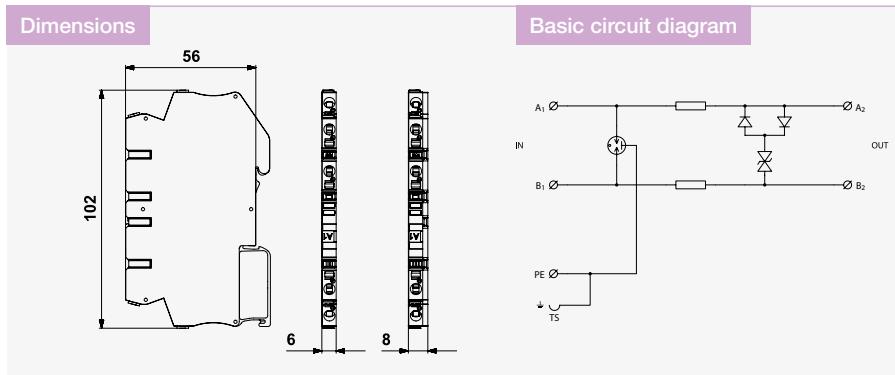

Parameter / Type	DMHF-006/1-RB	DMHF-015/1-RB
Connection (input - output)	screwless terminals	screwless terminals
Location of SPD	ST 2+3	ST 2+3
Nominal voltage U_n	6 V DC	15 V DC
Maximum operating voltage U_c	6 V AC / 8,5 V DC	6 V AC / 8,5 V DC
Nominal load current I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 μ s) per core	I_n 5 kA	5 kA
C2 total discharge current (8/20 μ s) cores-PE	I_{Total} 10 kA	10 kA
D1 impulse discharge current (10/350 μ s) per core	I_{imp} 0,5 kA	0,5 kA
C2 voltage protection level mode core-core at I_n	U_p 26 V	36 V
C2 voltage protection level mode core-PE at I_n	U_p 350 V	350 V
C3 voltage protection level mode core-core at 1 kV/ μ s	U_p 14 V	28 V
C3 voltage protection level mode core-PE at 1 kV/ μ s	U_p 500 V	500 V
Response time core-core	t_a 1 ns	1 ns
Response time core-PE	t_a 100 ns	100 ns
Serial resistance per core	R 1,6 Ω	1,6 Ω
Threshold frequency core-core	f 70 MHz	70 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C	-40 °C / 70 °C
Mounting	DIN rail 35 mm	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3	
Ordering number	A06064	A06290



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page


by type

197

DMLF-024/1-RB

Coarse and fine surge protection for telecommunications and signalling network with limiting Radio-frequency interference coupling impedance (inductance), screwless terminals

- coarse and fine surge protection for low-frequency 2-core signalling networks
- installation close to protected equipment
- for protection of analogue measuring lines in the areas with RF disturbance
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

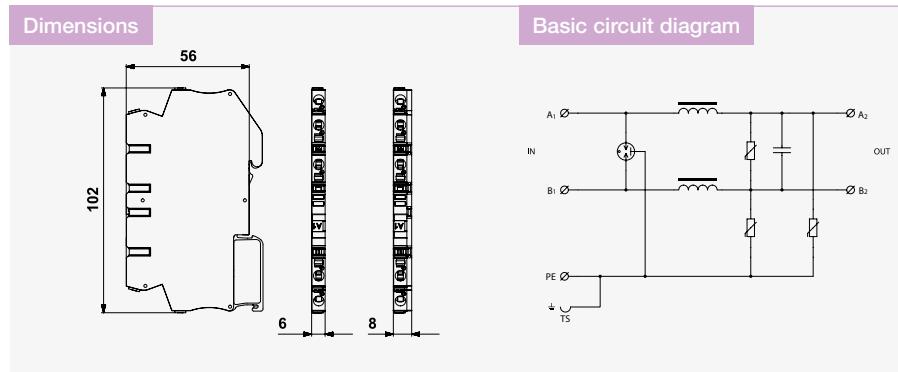

Parameter / Type	DMLF-024/1-RB
Connection (input - output)	screwless terminals
Location of SPD	ST 2
Nominal voltage	U _n 24 V DC
Maximum operating voltage	U _c 31 V DC
Nominal load current	I _L 0,1 A
C2 nominal discharge current (8/20 µs) per core	I _n 5 kA
C2 total discharge current (8/20 µs) cores-PE	I _{Total} 10 kA
D1 impulse discharge current (10/350 µs) per core	I _{imp} 0,5 kA
C2 voltage protection level mode core-core at I _n	U _p 65 V
C2 voltage protection level mode core-PE at I _n	U _p 80 V
C3 voltage protection level mode core-core at 1 kV/µs	U _p 55 V
C3 voltage protection level mode core-PE at 1 kV/µs	U _p 55 V
Response time core-core	t _a 25 ns
Response time core-PE	t _a 25 ns
Threshold frequency core-core	f 0,07 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A06069


Accessories:	Ordering number	See page
Cross connectors for terminal blocks with screwless terminals (-RB)	by type	197

DS-B090-RB

Single stage surge protection

B – Gas Discharge Tube, screwless terminal

- coarse single stage surge arrester
- for protection of signalling, data and other lines against impact of surge voltage
- usable mainly for the separation of shielding from the protective earth

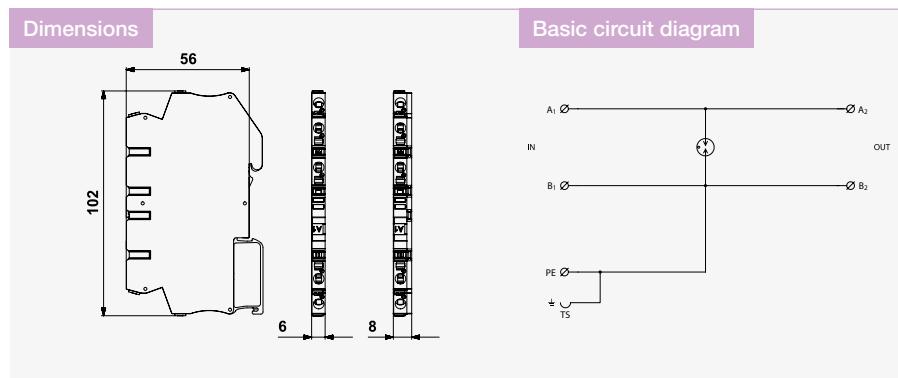

Parameter / Type	DS-B090-RB
Connection (input - output)	screwless terminals
Location of SPD	ST 2
Maximum operating voltage U_c	50 V AC / 70 V DC
Nominal load current I_L	10 A
C2 nominal discharge current (8/20 μ s) per core	10 kA
D1 impulse discharge current (10/350 μ s) per core	0,5 kA
C3 voltage protection level mode core-PE at 1 kV/ μ s	550 V
Response time core-PE	100 ns
Threshold frequency core-core	110 MHz
Cross-section of connected conductors solid (min/max)	0,08 mm ² / 4 mm ²
Cross-section of connected conductors stranded (min/max)	0,08 mm ² / 2,5 mm ²
Range of operating temperatures (min/max)	-40 °C / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A06070



Accessories:

Cross connectors for terminal blocks with screwless terminals (-RB)

Ordering number

See page

by type

197

SPDs for data / signalling / telecommunication networks

SPDs for phone lines

Phone lines still play an important role in communications, not only in traditional voice services but also in data transmission, such as DSL technologies. The reliability of these networks depends on good surge protection, which minimises the risk of equipment damage and disruption of service.

SALTEK offers advanced surge protectors specifically designed for telephone lines, ensuring the safety of both legacy systems and mo-



dern high-speed technologies such as VDSL3. Our products provide comprehensive protection for all types of metallic lines, both in simple installations and in large and demanding networks.


With our surge protectors, telecommunications and data systems remain reliably functional even in challenging conditions. These elements play a key role in ensuring the safety of critical infrastructure where seamless communication is essential.

- Coarse and fine protection SPDs
- For protection of telecommunication lines (ISDN, xDSL, xDSL2, xDSL2+, VDSL3)
- Line DL-TLF-UHF
- Line DL-ISDN
- Line DL-VDSL

DL-TLF-UHF

SPD for analogue phone line and xDSL protection
screw terminals

- combination of coarse and fine protection for phone and xDSL lines
- for protection of one line pair of telecommunication equipment
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

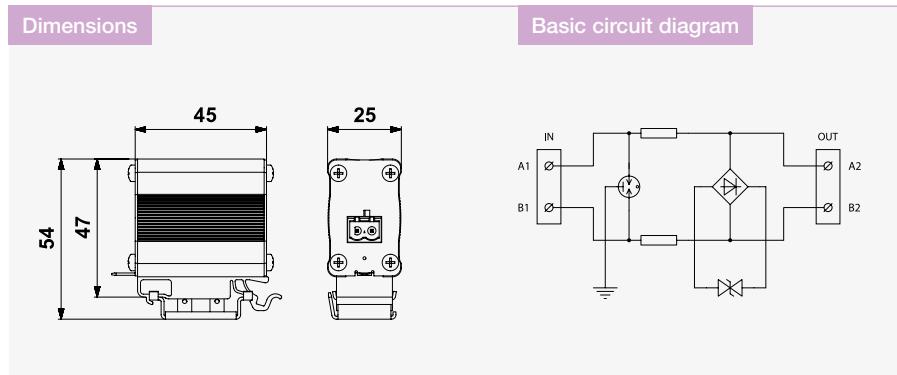

Parameter / Type	DL-TLF-UHF
Location of SPD	ST 1+2+3
Maximum operating voltage	U_c 170 V DC
Nominal load current at 25 °C	I_L 0,3 A
D1 total impulse current (10/350 µs) cores-PE	I_{total} 5 kA
C2 nominal discharge current (8/20 µs) core-core	I_n 5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n)	U_p 600 V (10 kV / 5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n)	U_p 900 V (10 kV / 5 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs)	U_p 250 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs)	U_p 550 V (10 A)
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Serial resistance per core	R 10 Ω
Threshold frequency core-core	f 150 MHz (@ -1dB)
Insertion attenuation	A <1 dB (@ 35 MHz)
Connection (input - output)	screw terminals for wire cross-section 0,2 to 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A07084


ezū

DL-VDSL3

SPD for high-speed xDSL lines
screw terminals

- combination of coarse and fine protection for high-speed xDSL lines
- for protection of one line pair of ADSL2, VDSL2, VDSL2+, VDSL3

- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

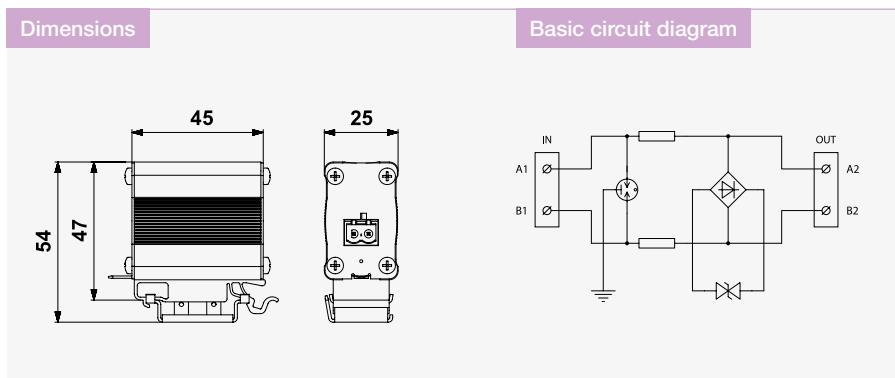

Parameter / Type	DL-VDSL3
Location of SPD	ST 1+2+3
Maximum operating voltage	U_c 60 V DC
Nominal load current at 25 °C	I_L 0,6 A
D1 total impulse current (10/350 µs) cores-PE	I_{total} 5 kA
C2 nominal discharge current (8/20 µs) core-core	I_n 5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n)	U_p 450 V (10 kV / 5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n)	U_p 1100 V (10 kV / 5 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs)	U_p 90 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs)	U_p 600 V (10 A)
Response time core-core	t_a 1 ns
Response time core-PE	t_a 100 ns
Serial resistance per core	R 2,2 Ω
Threshold frequency core-core	f 300 MHz (@ -1dB)
Insertion attenuation	A <0,2 dB (@ 35 MHz)
Connection (input - output)	screw terminals for wire cross-section 0,2 to 2,5 mm ²
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 / 70 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A07120


ezū

DL-ISDN RJ45

SPD for telephone lines
RJ45 connectors

- combination of coarse and fine protection for ISDN lines
- for protection of one pair of ISDN line in telecommunication equipment

- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

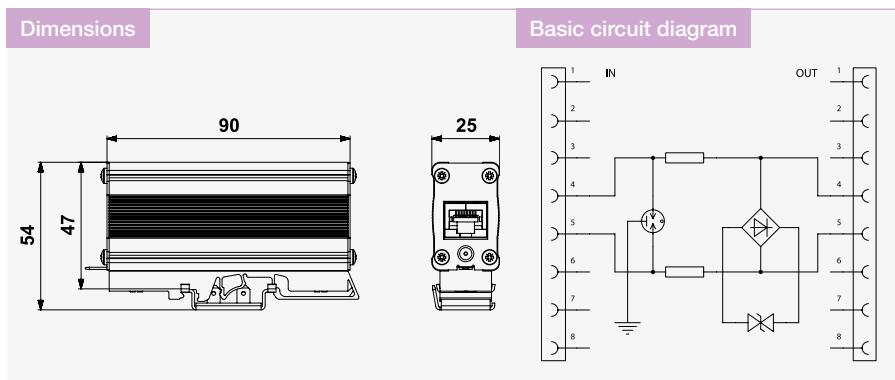

Parameter / Type	DL-ISDN RJ45
Location of SPD	ST 2+3
Maximum operating voltage U_c	86 V AC / 121 V DC
Nominal load current I_L	0,06 A
C2 nominal discharge current (8/20 μ s) per core I_n	2,5 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	270 V (5 kV/2,5 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_p) U_p	300 V (5 kV/2,5 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/ μ s) U_p	180 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/ μ s) U_p	400 V (10 A)
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Serial resistance per core R	6,8 Ω
Threshold frequency core-core f	80 MHz
Connection (input - output)	RJ 45/RJ 45
Degree of protection	IP 20
Range of operating temperatures (min/max)	-40 °C / 80 °C
Mounting	DIN rail 35 mm
According to standard	EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 / C2,C3
Ordering number	A03382

SPDs for data / signalling / telecommunication networks

SPDs for Ethernet networks

Ethernet networks have permeated almost every field of human activity and in many cases are part of critical infrastructures and processes. Therefore, their protection is one of the most important. SALTEK's portfolio includes modern protection elements capable of reli-



ably protecting all types of metallic data lines (DL series) or video lines (VL series), from simple Ethernet networks to smart structured cabling networks, from older ADSL lines to new high-speed VDSL3 lines and many more.

- SPDs for protection of Ethernet networks up to 10 Gbps bitrate
- Variants for lines combined with Power over Ethernet (PoE)

- Line DL-Cat.6A – surge arresters
- Line DL-1G and DL-10G – surge arresters
- Line DL-...-60V – for general structured cabling networks

DL-Cat. 6A-...


SPDs for Ethernet network and general structured cabling

LPZ 1 and higher

- fine surge protection
- installation at protected device inside LPZ 1 and higher (not suitable for LPZ 0)
- DL-Cat.6A - for protection of Ethernet networks (up to Cat.6A) without PoE

- DL-Cat.6A-60V - for protection of Ethernet networks (up to Cat.6A) with PoE and general structured cabling networks

- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

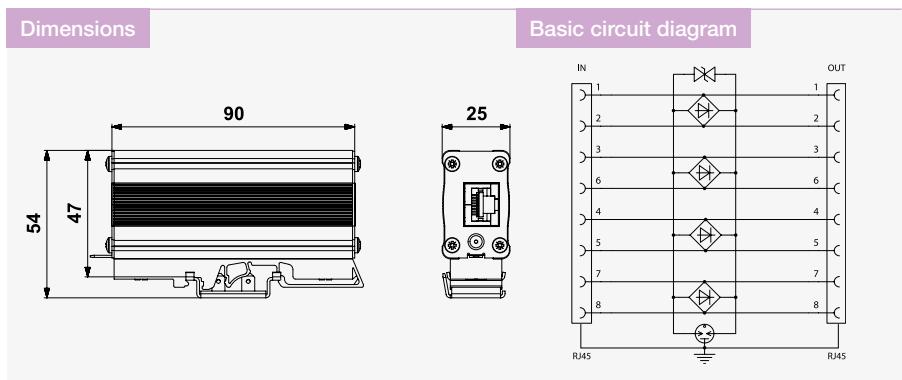

Parameter / Type	DL-Cat. 6A-60V	DL-Cat. 6A
Location of SPD	ST2+3	ST2+3
Maximum operating voltage core-core (data) U_c	60 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	8,5 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	130 V (0,4 kV/0,2 kA)	55 V (0,4 kV/0,2 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	400 V (0,4 kV/0,2 kA)	400 V (0,4 kV/0,2 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	130 V (0,4 kV/0,2 kA)	55 V (0,4 kV/0,2 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	130 V (10 A)	30 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	130 V (10 A)	55 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	NO
Ordering number	A07108	A06574


ezú

ezú

DL-..G-RJ45-PoE-AB

SPDs for Ethernet networks with PoE
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE
- installation at the entry of the line into building or close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE (Power over Ethernet) against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder
- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)

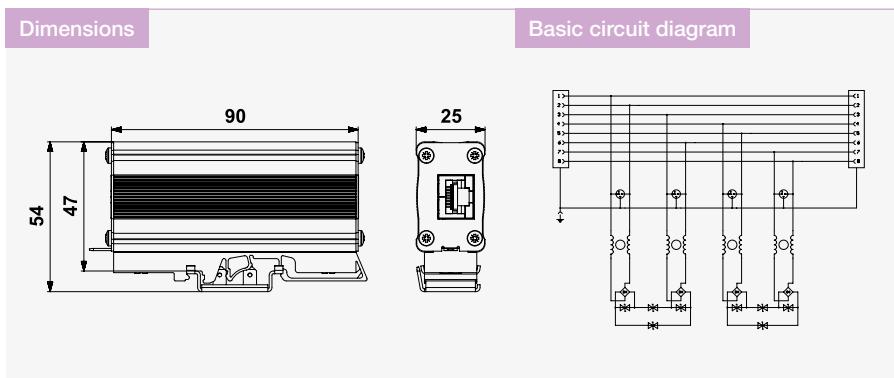


Parameter / Type	DL-1G-RJ45-PoE-AB	DL-10G-RJ45-PoE-AB
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC	58 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV/0,15 kA)	60 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	45 V (10 A)	45 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,2 dB	1,8 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A06148	A06149

DL-10G-PoE-IP66

SPD for outdoor mounted Ethernet devices with PoE
LPZ 0

- combination of coarse and fine protection of Ethernet line with PoE
- protection of exterior Ethernet network devices (cameras, sensors, information panels, APs, etc.)
- exterior installation - anywhere at LPZ 0 because of IP66 water and dust protection
- suitable for all PoE types (IEEE 802.3 af/at/bt)
- in the scope of delivery: mounting material for panel and pole montage

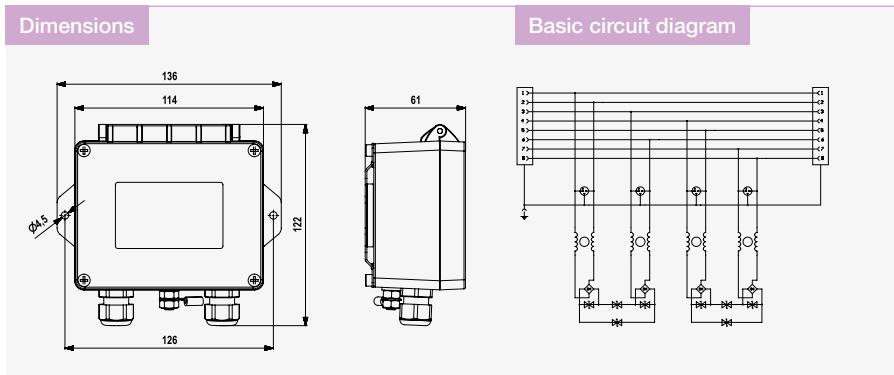

Parameter / Type	DL-10G-PoE-IP66
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV / 0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV / 1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV / 0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	45 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	500 MHz
Insertion attenuation at f_{max}	3,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 66
Mounting	panel / pole / mast
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21 + A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt
Ordering number	A07098

ezü

DL-..G-60V-PoE


SPDs for Ethernet networks with PoE and general structured cabling
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected

equipment, at the boundary of LPZ 0 and LPZ 1 or higher

- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage

- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

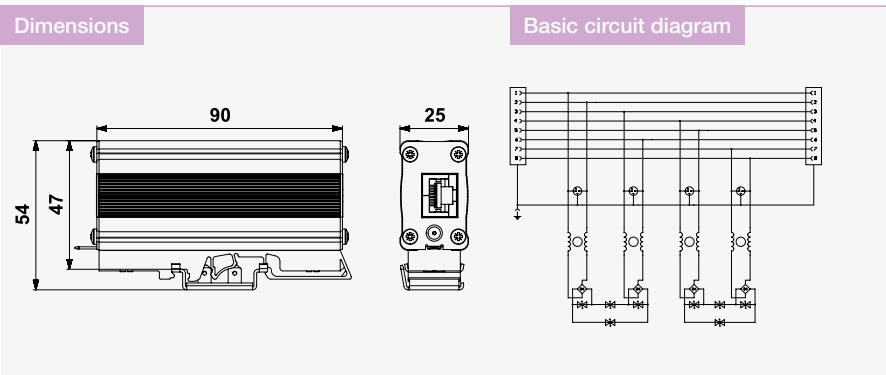

Parameter / Type	DL-1G-60V-PoE	DL-10G-60V-PoE
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	120 V (0,3 kV/0,15 kA)	120 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	110 V (10 A)	110 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,5 dB	2,5 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A07069	A07070

DL-1G-POE-INJECTOR

SPDs for Ethernet networks


passive midspan PoE injector with integrated SPD

- two-stage surge protection device for Ethernet and PoE protection with integrated PoE/PoE+ injector
- installed at the boundary of LPZ 0 and LPZ 1 zones or near the equipment to be protected


- to protect Ethernet Cat. 6 lines with PoE (Power over Ethernet), operating in A and B modes



Dimensions

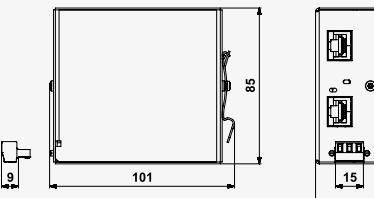


Basic circuit diagram

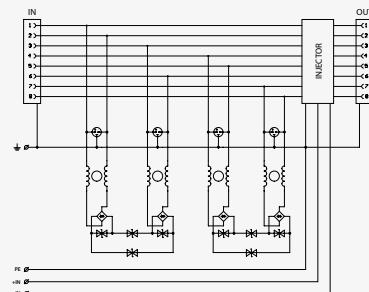

Parameter / Type	DL-1G-POE-INJECTOR
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	70 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	80 V (10 A)
C3 voltage protection level mode core-PE (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	80 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	250 MHz
Insertion attenuation at f_{max}	1,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at
Ordering number	A06620

SPDs for data / signalling / telecommunication networks

Multichannel SPDs for Ethernet networks

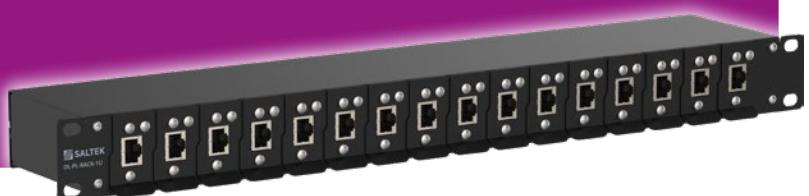

Modern information networks, including Ethernet networks, are among the basic building blocks of today's technological systems. Their reliability and security are crucial, especially in highly critical infrastructures. To ensure their maximum protection, SALTEK offers advanced surge protection solutions, including multi-channel systems designed for 19" enclosures. These solutions provide protection for Ethernet networks

with speeds up to 10G and are also available in Power over Ethernet (PoE) variants.

The special design for standardized 19" RACK enclosures (1RU) allows easy integration into existing server and network racks. In addition, the modular exchange system ensures easy maintenance and quick replacement of individual modules.

- SPDs for protection of Ethernet networks up to 10 Gbps
- Versions for lines with PoE (incl. injector) and general structured cabling
- Design for 19" RACK (height 1RU)
- Modular Plug&Play system
- DL-PL-RACK-1U – for various SPD modules installation
- DL-CS-RACK-1U-INJECTOR – for PoE injector with integrated SPD

SALTEK RACK system solution

For multichannel systems with (or without) 19" RACK cabinets are used, the new SALTEK RACK surge protection system is advantageous. This allows communication lines with different transmission categories to be routed through a single 1U profile and properly protected against overvoltages (according to the user's own configuration). This solution has not yet been possible with standard systems. The advantage is the space saving in the RACK cabinet due to the possibility of using different surge devices in a common box of 1U height. With dynamically expanding data networks, additional surge protection modules can be easily added to the boxes to expand the number of protected transmission channels.

■ DL-PL-RACK-1U

1RU box for mounting into a 19" RACK cabinet or standalone, allowing to be equipped with up to 16 independent plug-in modules of **DL-...-M** (or -R-M) series surge protection devices in the so called "Hot Plug&Play" system, i.e. with the possibility of changing the configuration of surge protectors during network operation without the necessity to disassemble the box. See Fig. 01.

■ DL-CS-RACK-1U-INJECTOR

1RU box for mounting into the 19" RACK cabinet, with pre-installed cabling for external power supply connection. Allows the integration of up to 6 midspan PoE injector **DL-1G-POE-PCB-INJECTOR** modules with integrated surge protection devices. See Fig. 02.


The injector can be programmed with jumpers to create either the **PoE A** or **PoE B** variant, including optional polarity setting for the **PoE A** version.

Fig. 01 DL-PL-RACK-1U and the installation of protection modules





Any combination of up to 16 different protection modules, as required

Fig. 02 DL-CS-RACK-1U-INJECTOR and the installation of protection modules

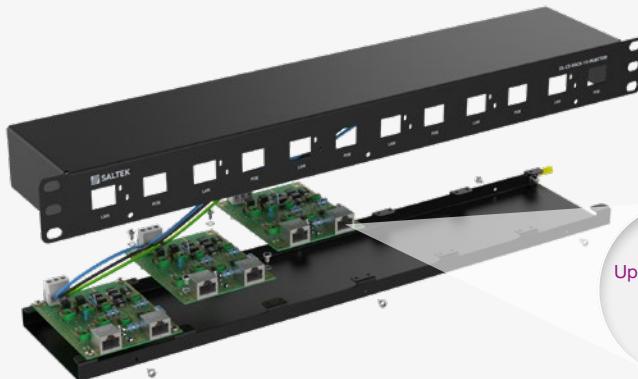

Up to 6 protection modules, as required

Fig. 03 Setting up the DL-1G-POE-PCB-INJECTOR module

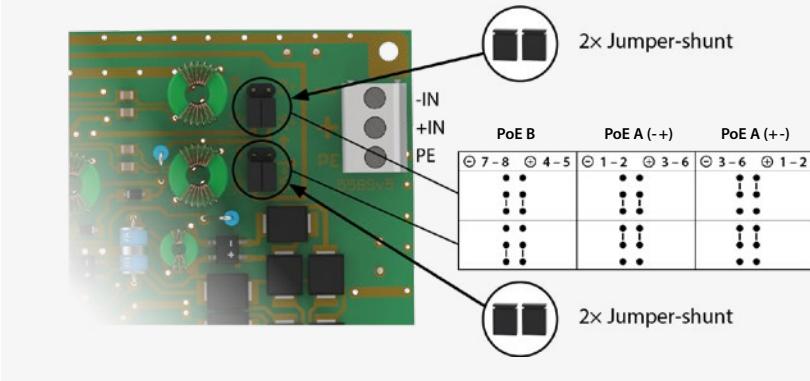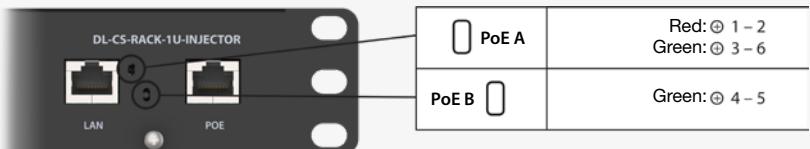


DL-PL-RACK-1U

SPDs for Ethernet networks, 19" RACK devices
mounting 1RU box for DL-...-M and DL-...-R-M modules

- mounting box for 19" Racks or free hanging
- for DL-...-M SPD and DL-...-R-M modules mounting
- surge protection of up to 16 independent lines
- 1RU profile
- easy Hot Plug&Play modules installation
- common modules grounding via box body



Dimensions

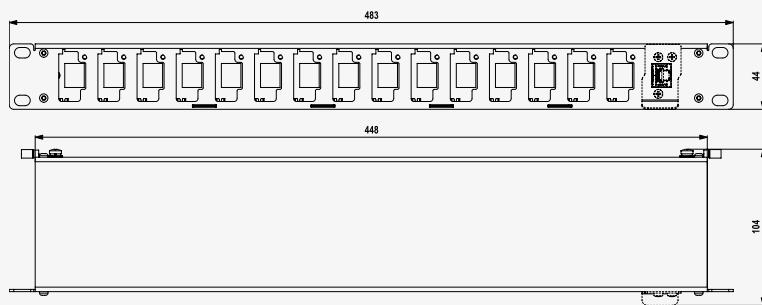

Type	DL-PL-RACK-1U
Ordering number	A04163


Cap for DL-PL-RACK-1U

SPDs for Ethernet networks, 19" RACK devices

- protection cap for unused modular slots



Dimensions




Type	Cap for DL-PL-RACK-1U
Ordering number	A04180

DL-Cat.6A-M / -R-M

Fine SPD module for Ethernet without PoE protection
LPZ 1 and higher

- fine surge protection
- installation at protected device inside LPZ 1 and higher (not suitable for LPZ 0)
- for protection of Ethernet networks (up to Cat.6A) without PoE
- installation into DL-PL-RACK-1U box
- DL-...-M with front output
- DL-...-R-M with rear output
- not applicable for Ethernet with PoE

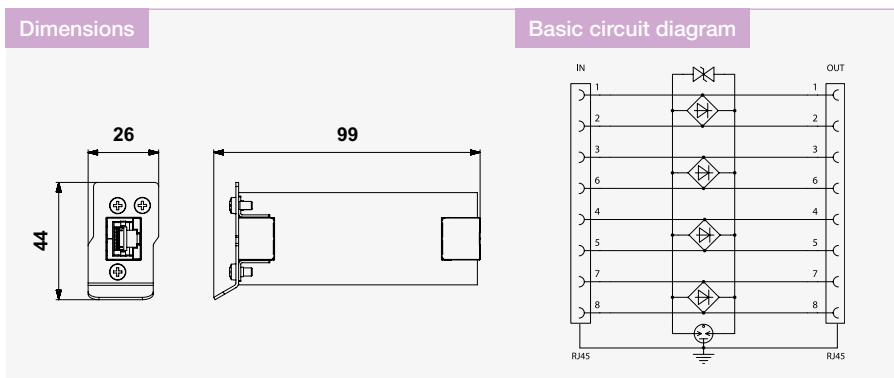

Parameter / Type	DL-Cat.6A-M	DL-Cat.6A-R-M
Location of SPD	ST2+3	ST2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	8,5 V DC	8,5 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	55 V (0,3 kV/0,15 kA)	55 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	400 V (2,5 kV/1,25 kA)	400 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	55 V (0,3 kV/0,15 kA)	55 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	30 V (10 A)	30 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	55 V (10 A)	55 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	no	no
Ordering number	A04196	A04184

ezü

ezü

DL-Cat.6A-60V-M / -R-M

Fine SPD module for Ethernet with PoE and general structured cabling protection
LPZ 1 and higher

- fine surge protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected


equipment, at the boundary of LPZ 0 and LPZ 1 or higher

- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage


- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box
- DL-...-M with front output
- DL-...-R-M with rear output



Dimensions



Basic circuit diagram




Parameter / Type	DL-Cat.6A-60V-M	DL-Cat.6A-60V-R-M
Location of SPD	ST 2+3	ST 2+3
Maximum operating voltage core-core (data) U_C	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_C	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,2 kA	0,2 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	1,6 kA	1,6 kA
C2 voltage protection level mode core-core (@ U_{OC}/I_n) U_p	130 V (0,4 kV/0,2 kA)	130 V (0,4 kV/0,2 kA)
C2 voltage protection level mode core-PE (@ U_{OC}/I_n) U_p	400 V (0,4 kV/1,2 kA)	400 V (0,4 kV/0,2 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{OC}/I_n) U_p	130 V (0,4 kV/0,2 kA)	130 V (0,4 kV/0,2 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	130 V (10 A)	130 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	600 V (10 A)	600 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	130 V (10 A)	130 V (10 A)
Response time core-core t_a	1 ns	1 ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	500 MHz	500 MHz
Insertion attenuation at f_{max}	2,9 dB	2,9 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / C2, C3	EN 61643-21+A1,A2 / C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A04210	A04209

DL-..G-PoE-M

Dual-stage SPD module for Ethernet with PoE
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE
- instalation at the entry of the line into building or close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE (Power over Ethernet) against surge voltage
- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box

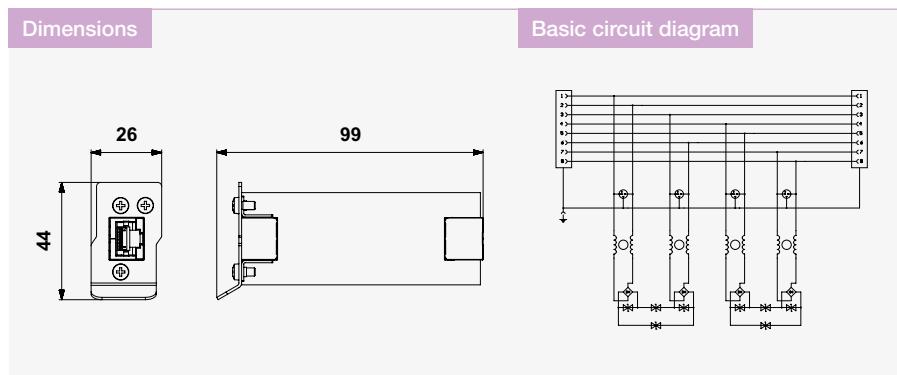

Parameter / Type	DL-1G-PoE-M	DL-10G-PoE-M
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC	58 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	60 V (0,3 kV/0,15 kA)	60 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	45 V (10 A)	45 V (10 A)
C3 voltage protection level mode core-PE (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ $I_n - 1 \text{ kV}/\mu\text{s}$) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,2 dB	1,8 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A04165	A04181

ezú

ezú

DL-..G-60V-PoE-M

Dual-stage SPD module for Ethernet with PoE and general structured cabling
LPZ 0 and higher

- combination of coarse and fine protection of Ethernet line with PoE and structured cabling networks with signals with amplitudes up to 60 V
- installation at the entry of the line into building or close to the protected


equipment, at the boundary of LPZ 0 and LPZ 1 or higher

- for protection of Ethernet line with PoE, IP telephony, KNX, DMX, RS-485, signalling loops and other signals over twisted pairs against surge voltage


- suitable for all PoE types – PoE/PoE+/PoE++ (IEEE 802.3 af/at/bt)
- installation into DL-PL-RACK-1U box



Dimensions



Basic circuit diagram




Parameter / Type	DL-1G-60V-PoE-M	DL-10G-60V-PoE-M
Location of SPD	ST 1+2+3	ST 1+2+3
Maximum operating voltage core-core (data) U_c	60 V DC	60 V DC
Maximum operating voltage pair-pair (PoE) U_c	60 V DC	60 V DC
Nominal load current at 25 °C I_L	0,5 A	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	120 V (0,3 kV/0,15 kA)	120 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	110 V (10 A)	110 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	85 V (10 A)	85 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA	2 kA
Response time core-core t_a	1ns	1ns
Response time core-PE t_a	100 ns	100 ns
Maximum frequency f_{max}	250 MHz	500 MHz
Insertion attenuation at f_{max}	1,5 dB	2,5 dB
Connection (input/output)	RJ45 / RJ45	RJ45 / RJ45
Degree of protection	IP 20	IP 20
Mounting	DL-PL-RACK-1U	DL-PL-RACK-1U
Range of operating temperatures (min/max)	-10 °C / 50 °C	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at/bt	af/at/bt
Ordering number	A07085	A07086

DL-CS-RACK-1U-INJECTOR

SPDs for Ethernet networks, 19" RACK devices
1U height

- for SPD modules:
DL-1G-POE-PCB-INJECTOR
- including wiring for connection of SPD
modules (PoE supply)

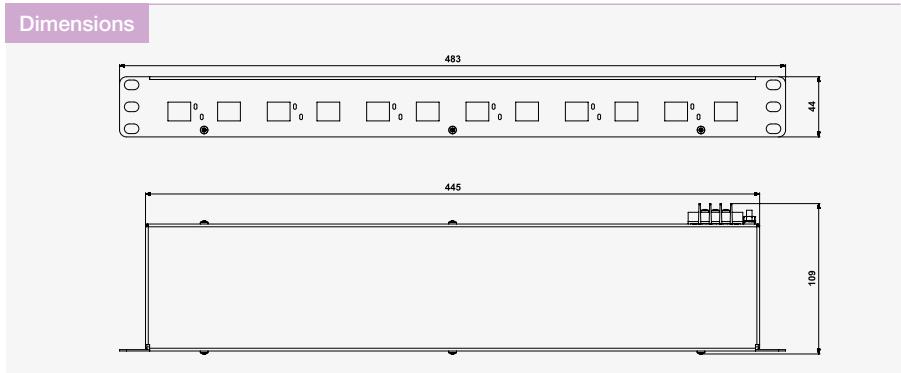

Type	DL-CS-RACK-1U-INJECTOR
Ordering number	A06569


Accessories	Ordering number	See page
SPD module	A06570	185

DL-1G-POE-PCB-INJECTOR

SPD for Ethernet networks


LPZ 0 and higher, RJ45 connectors, with integrated PoE injector

- combination of coarse and fine protection of Ethernet line with PoE
- installation at the entry of the line into building and close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- integrated midspan PoE injector (IEEE 802.3at)
- for protection of Ethernet line Cat. 6 with PoE (Power over Ethernet)
- for assembly to DL-CS-RACK-1U-INJECTOR

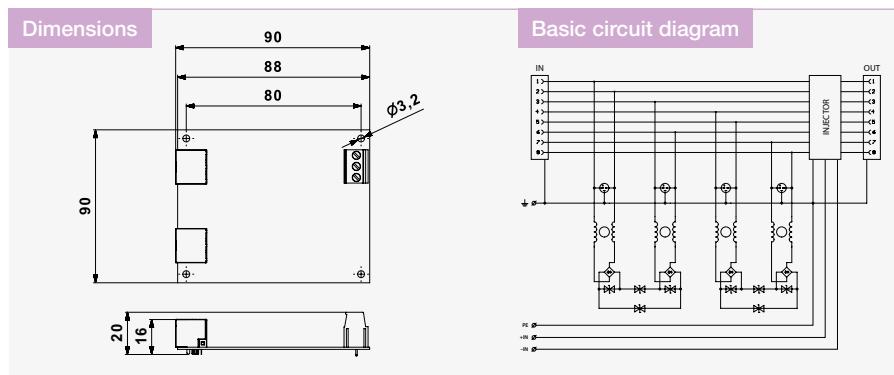

Parameter / Type	DL-1G-POE-PCB-INJECTOR
Location of SPD	ST 1+2+3
Maximum operating voltage core-core (data) U_c	8,5 V DC
Maximum operating voltage pair-pair (PoE) U_c	58 V DC
Nominal load current at 25 °C I_L	0,5 A
C2 nominal discharge current (8/20 µs) per core I_n	0,15 kA
C2 total discharge current (8/20 µs) cores-PE I_{total}	10 kA
C2 voltage protection level mode core-core (@ U_{oc}/I_n) U_p	70 V (0,3 kV/0,15 kA)
C2 voltage protection level mode core-PE (@ U_{oc}/I_n) U_p	700 V (2,5 kV/1,25 kA)
C2 voltage protection level mode pair-pair (PoE) (@ U_{oc}/I_n) U_p	90 V (0,3 kV/0,15 kA)
C3 voltage protection level mode core-core (@ I_n - 1 kV/µs) U_p	80 V (10 A)
C3 voltage protection level mode core-PE (@ I_n - 1 kV/µs) U_p	500 V (10 A)
C3 voltage protection level mode pair-pair (PoE) (@ I_n - 1 kV/µs) U_p	80 V (10 A)
D1 total discharge current (10/350 µs) cores-PE I_{total}	2 kA
Response time core-core t_a	1 ns
Response time core-PE t_a	100 ns
Maximum frequency f_{max}	250 MHz
Insertion attenuation at f_{max}	1,2 dB
Connection (input/output)	RJ45 / RJ45
Degree of protection	IP 20
Mounting	DL-CS-RACK-1U-INJECTOR
Range of operating temperatures (min/max)	-10 °C / 50 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
According to IEEE 802.3 standard (PoE)	af/at
Ordering number	A06570

Notes

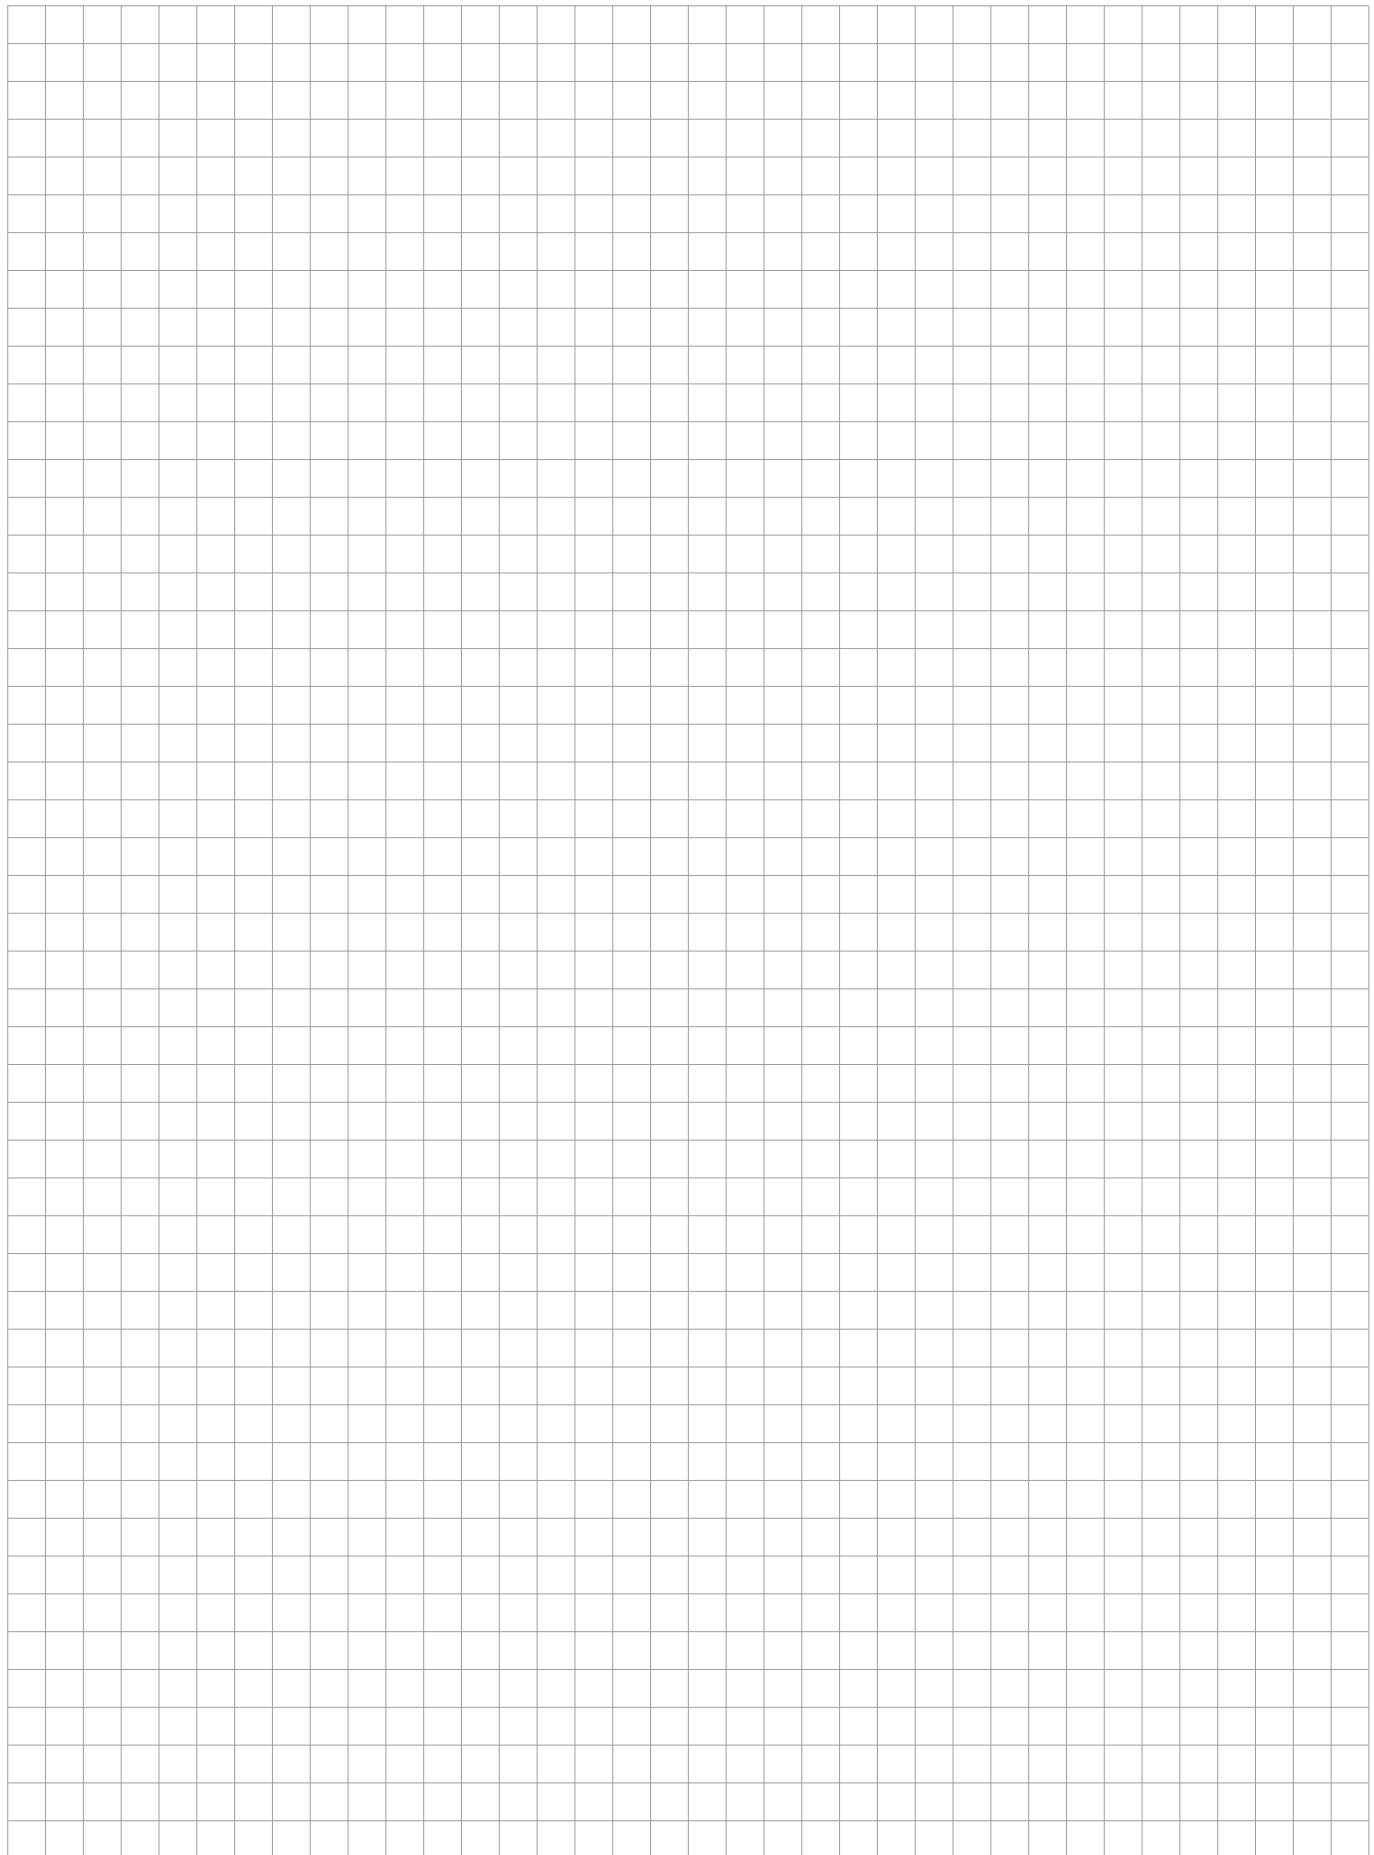A large grid of squares, approximately 20 columns by 25 rows, intended for handwritten notes.

SPDs for data / signalling / telecommunication networks

SPDs for devices with coaxial interfaces



The task of the coaxial protection elements is to reliably protect the various types of radio communication technologies. They are particularly important when the technological devices are to process signals of a very low signal level (radio receivers, transceivers, cellular communication technologies, etc.). The circuits used here


are adapted to the high sensitivity required for signals in the order of microvolts and therefore cannot withstand pulsed overvoltages with amplitudes many orders of magnitude higher. Expensive professional technology can then only be protected against destruction by well-designed surge protection devices.

- Protection of coaxial video interfaces
- Radiocommunication technology protection (transmitters and receivers)
- SPDs for TV/SAT/CATV receivers
- Line VL – surge arrester for video lines
- Line HX, ZX and FX – Lightning Current Arresters
- Line SX – Combined Arresters

VL-B75 F/F

SPDs for video distribution networks
BNC connectors, 75 Ω

- combination of coarse and fine protection for video circuits
- installation close to protected equipment
- for protection of video systems, CCTV, etc. against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

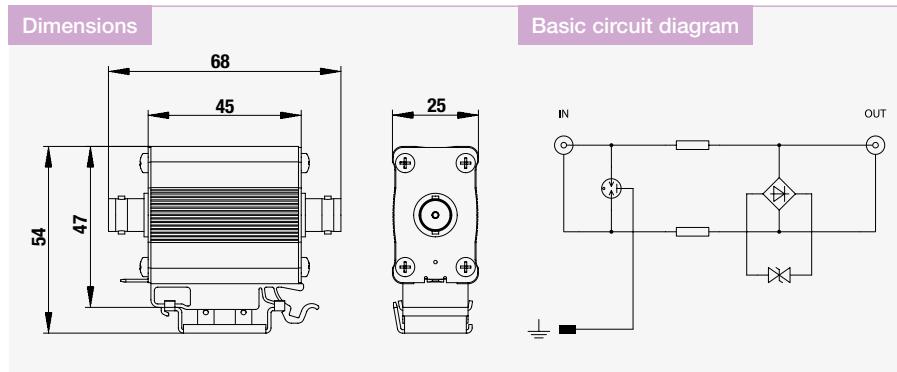


Parameter / Type	VL-B75 F/F
Location of SPD	ST 2+3
Maximum operating voltage U_c	8,5 V DC
Nominal load current at 25 °C I_L	0,06 A
C2 nominal discharge current (8/20 µs) core-SH I_n	5 kA
C2 nominal discharge current (8/20 µs) SH-PE I_n	5 kA
C2 voltage protection level mode core-SH at I_n U_p	150 V
C2 voltage protection level mode SH-PE at I_n U_p	350 V
C3 voltage protection level mode core-SH at 1 kV/µs U_p	35 V
C3 voltage protection level mode SH-PE at 1 kV/µs U_p	350 V
Response time core-SH t_a	1 ns
Response time SH-PE t_a	100 ns
Impedance Z	75 Ω
Frequency range f	0 - 150 MHz
Connection (input-output)	BNC 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / C2, C3
Ordering number	A03376

HX-090 SMA F/M

Lightning current arrester for coaxial lines
SMA connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

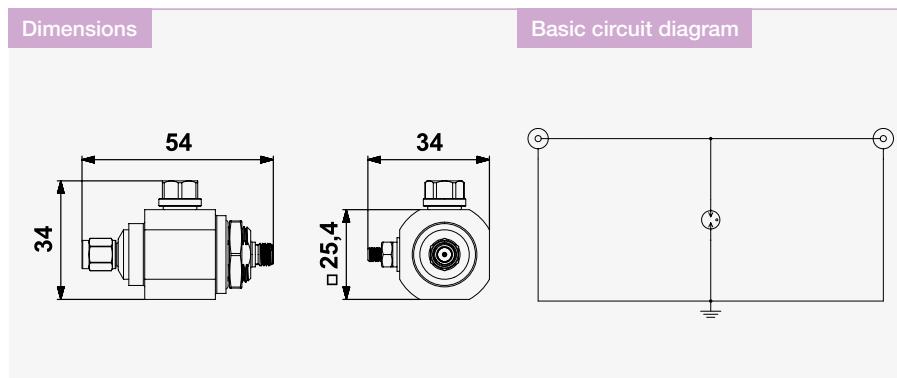


Parameter / Type	HX-090 SMA F/M
Location of SPD	ST 1+2
Maximum operating voltage	U_c 70 V DC
Nominal load current at 25 °C	I_L 6 A
C2 nominal discharge current (8/20 μs) core-PE	I_n 10 kA
D1 impulse discharge current (10/350 μs) core-PE	I_{imp} 2,5 kA
Dynamic spark-over voltage at 1kV/μs	U_{dyn} 700 V
Response time core-PE	t_a 100 ns
Impedance	Z 50 Ω
Power (CW)	P 40 W
Frequency range	f 0 - 3,8 GHz
Insertion loss typ. (max.)	A 0,2 (0,4) dB
VSWR typ. (max.)	1,1 (1,2)
Connection (input-output)	SMA 50
Degree of protection	IP 66
Mounting	panel (\varnothing 17mm) / HX holder
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04134

HX-... N50 F/.

Lightning current arrester for coaxial lines
N connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

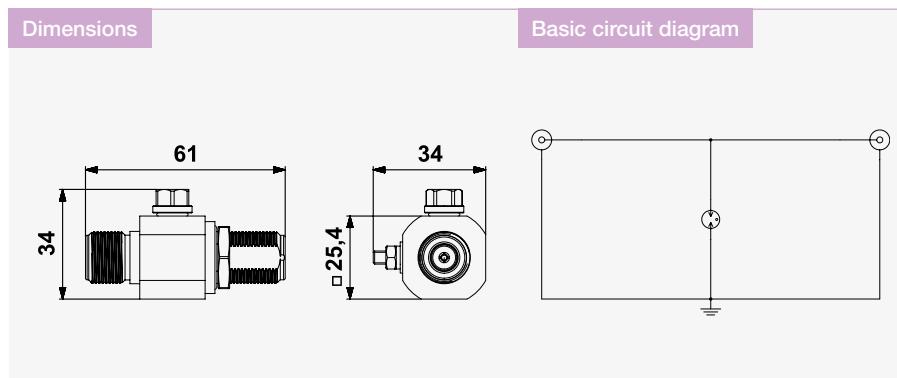


Parameter / Type	HX-090 N50 F/F	HX-090 N50 F/M	HX-230 N50 F/F	HX-230 N50 F/M
Location of SPD	ST 1+2	ST 1+2	ST 1+2	ST 1+2
Maximum operating voltage U_c	70 V DC	70 V DC	180 V DC	180 V DC
Nominal load current at 25 °C I_L	6 A	6 A	6 A	6 A
C2 nominal discharge current (8/20 µs) core-PE I_n	10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	2,5 kA	2,5 kA	2,5 kA	2,5 kA
Dynamic spark-over voltage at 1 kV/µs U_{dyn}	700 V	700 V	800 V	800 V
Response time core-PE t_a	100 ns	100 ns	100 ns	100 ns
Impedance Z	50 Ω	50 Ω	50 Ω	50 Ω
Power (CW) P	40 W	40 W	295 W	295 W
Frequency range f	0 - 3,8 GHz			
Insertion loss typ. (max.) A	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB
VSWR typ. (max.)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)
Connection (input-output)	N 50	N 50	N 50	N 50
Degree of protection	IP 66	IP 66	IP 66	IP 66
Mounting	panel (Ø 17 mm) / HX holder			
Range of operating temperatures (min/max)	-40 °C / 80 °C			
According to standard	EN 61643-21+A1,A2 / D1, C2, C3			
Ordering number	A03405	A03346	A03511	A03510

HX-... N50 F/.

Lightning current arrester for coaxial lines
N connectors, 50 Ω

- lightning current arrester for coaxial line
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of radiocommunication equipment against impact of direct or indirect lightning strike
- suitable for the combined signal and power supply distribution

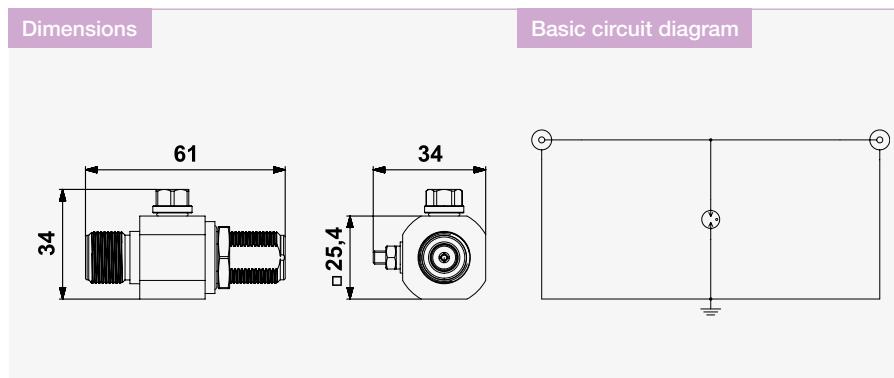


Parameter / Type	HX-350-N50 F/F	HX-350-N50 F/M	HX-470-N50 F/F	HX-470-N50 F/M
Location of SPD	ST 1+2	ST 1+2	ST 1+2	ST 1+2
Maximum operating voltage	U_c 250 V DC	250 V DC	360 V DC	360 V DC
Nominal load current at 25 °C	I_L 6 A	6 A	6 A	6 A
C2 nominal discharge current (8/20 µs) core-PE	I_n 10 kA	10 kA	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-PE	I_{imp} 2,5 kA	2,5 kA	2,5 kA	2,5 kA
Dynamic spark-over voltage at 1 kV/µs	U_{dyn} 900 V	900 V	980 V	980 V
Response time core-PE	t_a 100 ns	100 ns	100 ns	100 ns
Impedance	Z 50 Ω	50 Ω	50 Ω	50 Ω
Power (CW)	P 570 W	570 W	1175 W	1175 W
Frequency range	f 0 - 3,5 GHz	0 - 3,5 GHz	0 - 3,0 GHz	0 - 3,0 GHz
Insertion loss typ. (max.)	A 0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB	0,2 (0,4) dB
VSWR typ. (max.)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)	1,1 (1,2)
Connection (input-output)	N 50	N 50	N 50	N 50
Degree of protection	IP 66	IP 66	IP 66	IP 66
Mounting	panel (Ø 17 mm) / HX holder			
Range of operating temperatures (min/max)	-40 °C / 80 °C			
According to standard	EN 61643-21+A1,A2 / D1, C2, C3			
Ordering number	A06703	A06704	A06555	A06556

ZX-0,44-N50-F/F

Lightning current arrester for coaxial lines

connectors N 50 Ω, λ/4 short circuit impedance transformer

- lightning current arrester uses λ/4 short circuit impedance transformer
- installation at the boundary of LPZ 0 and LPZ 1 zones (or higher) at the line entry into building
- for protection of coaxial radio lines and telecommunication devices against impact of direct or indirect lightning strike
- it works like band-pass (filter) for a relatively narrow frequency spectrum around the base frequency, outside of this spectrum it works like a short circuit (not suitable for combination with power supply)

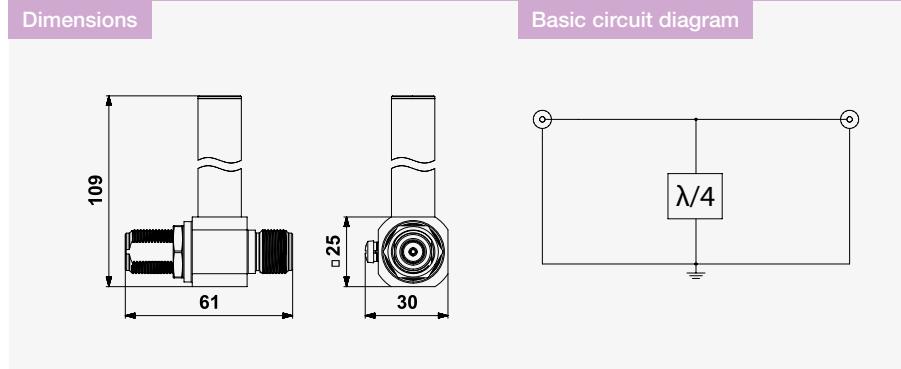


Parameter / Type	ZX-0,44-N50-F/F
Location of SPD	ST 1+2+3
C2 nominal discharge current (8/20 µs) core-PE	I_n 20 kA
D1 impulse discharge current (10/350 µs) core-PE	I_{imp} 5 kA
Dynamic spark-over voltage at 1 kV/µs	U_{dyn} 0,25 V
Response time core-PE	t_a 1 ns
Impedance	Z 50 Ω
Power (CW)	P 2000 W
Frequency range*	f 390 - 490 MHz
Insertion loss typ. (max.)	A 0,1 (0,2) dB
VSWR typ. (max.)	1,1 (1,2)
Connection (input-output)	N 50
Degree of protection	IP 66
Mounting	panel (\varnothing 17 mm) / HX holder
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A06207

* Frequency range according to tuning

FX-... .75 T F/F

Lightning current arrester for floating coaxial lines
F connectors, 75 Ω

- lightning current arrester with floating shielding (separated by GDT)
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of floating coaxial lines of TV and CCTV systems, suitable as the 1st level of surge for protection in coordination with the SX type
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

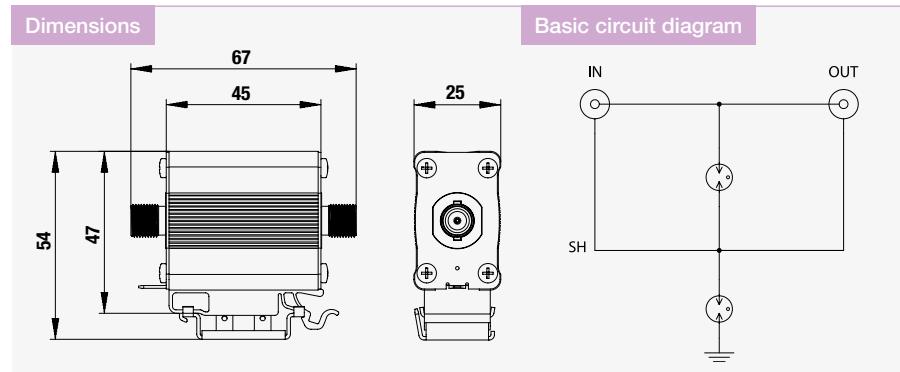


Parameter / Type	FX-090 B75 T F/F	FX-090 F75 T F/F	FX-230 F75 T F/F
Location of SPD	ST 1	ST 1	ST 1
Maximum operating voltage	U_c	70 V DC	70 V DC
Nominal load current at 25 °C	I_L	4 A	4 A
C2 nominal discharge current (8/20 µs) core-SH	I_n	10 kA	10 kA
C2 nominal discharge current (8/20 µs) SH-PE	I_n	10 kA	10 kA
D1 impulse discharge current (10/350 µs) core-SH	I_{imp}	2,5 kA	2,5 kA
D1 impulse discharge current (10/350 µs) SH-PE	I_{imp}	2,5 kA	2,5 kA
C3 voltage protection level mode core-SH at 1 kV/µs	U_p	1 200 V	1 200 V
C3 voltage protection level mode SH-PE at 1 kV/µs	U_p	600 V	600 V
Response time core-SH	t_a	100 ns	100 ns
Response time SH-PE	t_a	100 ns	100 ns
Impedance	Z	75 Ω	75 Ω
Frequency range	f	0 - 2,15 GHz	0 - 2,15 GHz
Insertion loss typ. (max.)	A	0,6 dB (1 dB)	0,6 dB (1 dB)
VSWR typ. (max.)		1,2 (1,5)	1,2 (1,5)
Connection (input-output)		BNC 75	F 75
Degree of protection		IP 20	IP 20
Mounting		DIN rail 35 mm	DIN rail 35 mm
Range of operating temperatures (min/max)		-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2	EN 61643-21+A1,A2 / D1, C2	EN 61643-21+A1,A2 / D1, C2
Ordering number	A03385	A03387	A03392

FX-090-F75 F/F

Lightning current arrester for coaxial lines
F connectors, 75 Ω

- lightning current arrester with grounded shielding
- installation at the boundary of LPZ 0 and LPZ 1 zones at the line entry into building
- for protection of coaxial lines of TV and CCTV systems, suitable as the 1st level of surge for protection in coordination with the SX type
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

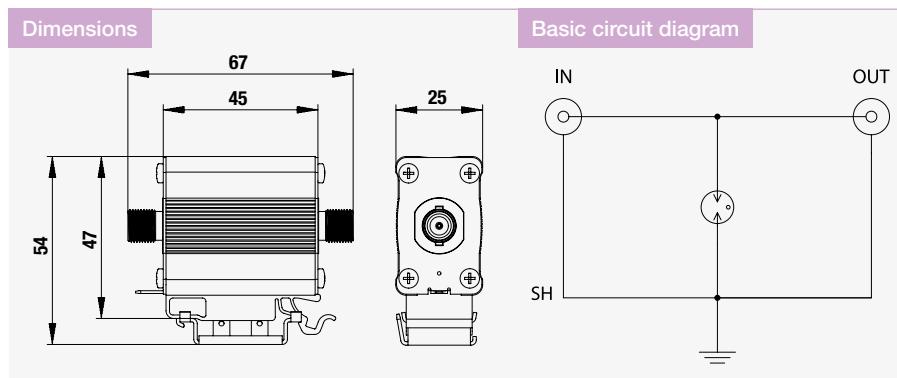


Parameter / Type	FX-090-F75 F/F
Location of SPD	ST 1
Maximum operating voltage U_c	70 V DC
Nominal load current at 25 °C I_L	4 A
C2 nominal discharge current (8/20 µs) core-PE I_n	10 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	2,5 kA
C3 voltage protection level mode core-PE at 1 kV/µs U_p	1 200 V
Response time core-PE t_a	100 ns
Impedance Z	75 Ω
Frequency range f	0 - 2,3 GHz
Insertion loss typ. (max.) A	0,6 dB (1 dB)
VSWR typ. (max.)	1,2 (1,5)
Connection (input-output)	F 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 61643-21+A1,A2 / D1, C2
Ordering number	A04212

SX-090-B50 F/F

Dual-stage lightning arrester for coaxial lines
BNC connectors, 50 Ω

- dual stage coarse and fine arrester, shielding connected to protective grounding
- installation close to protected equipment or at the LPZ 0_B - LPZ 1 boundary
- for complex protection of sensitive professional receivers inputs (GPS, SAT,...) against overvoltage
- suitable for combined RF and DC distribution via coaxial cable
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

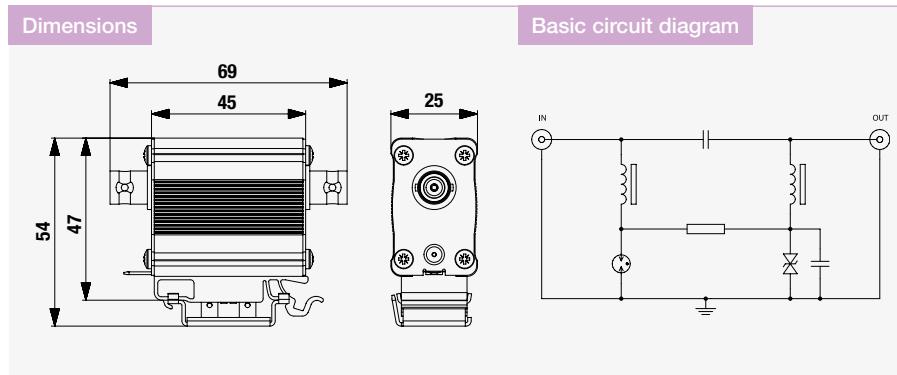


Parameter / Type	SX-090-B50 F/F
Location of SPD	ST 1+2+3
Maximum operating voltage U_c	26 V DC
Nominal load current at 25 °C I_L	0,7 A
C2 nominal discharge current (8/20 µs) core-PE I_n	2,5 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	700 V
C3 voltage protection level mode core-PE at $I_n = 100$ A (10/1000) U_p	85 V
Response time core-PE t_a	1 ns
Impedance Z	50 Ω
Frequency range f	0 - 3 GHz
Insertion loss typ. (max.) A	1,5 (3,0) dB
VSWR typ. (max.)	1,2 (1,3)
Connection (input-output)	BNC 50
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04157

SX-090 F75 F/F

Surge arrester for coaxial lines
F connectors, 75 Ω

- dual stage coarse and fine arrester, shielding connected to protective grounding
- installation close to protected equipment or at the LPZ 0_B - LPZ 1 boundary


- for complex protection of coaxial inputs of TV/SAT and CCTV systems against surge voltage
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder

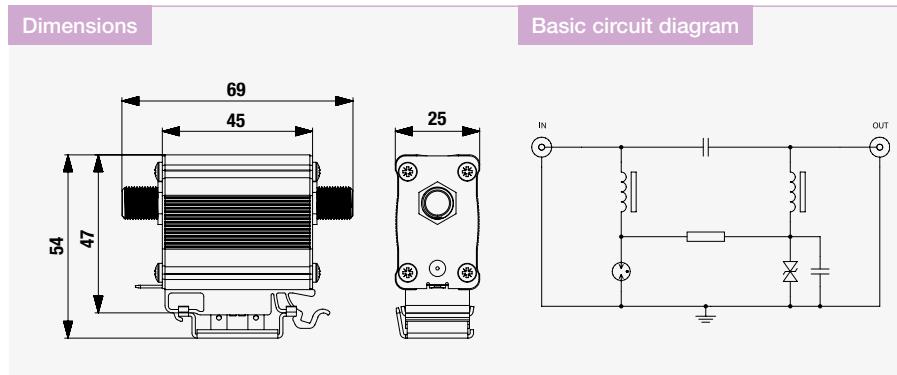

Parameter / Type	SX-090-F75 F/F
Location of SPD	ST 1+2+3
Maximum operating voltage U_c	26 V DC
Nominal load current at 25 °C I_L	0,7 A
C2 nominal discharge current (8/20 µs) core-PE I_n	2,5 kA
D1 impulse discharge current (10/350 µs) core-PE I_{imp}	0,5 kA
C2 voltage protection level mode core-PE at I_n U_p	700 V
C3 voltage protection level mode core-PE at $I_n = 100$ A (10/1000) U_p	85 V
Response time core-PE t_a	1 ns
Impedance Z	75 Ω
Frequency range f	0 - 2,3 GHz
Insertion loss typ. (max.) A	1,5 (3,0) dB
VSWR typ. (max.)	1,5 (2,0)
Connection (input-output)	F 75
Degree of protection	IP 20
Mounting	DIN rail 35 mm
Range of operating temperatures (min/max)	-40 °C / 70 °C
According to standard	EN 61643-21+A1,A2 / D1, C2, C3
Ordering number	A04158

Accessories for SPDs for data / signalling / telecommunication networks

Accessories for ICT SPDs

	Product	Ordering number	Example of use
	Connection bridge JRS 10P	B41175	


Accessories for ICT SPDs

	Product	Packaging	Ordering number	Example of use
	CS-2,5/4	15 pcs	B470104	
	CS-2,5/5	10 pcs	B470105	
	CS-2,5/10	5 pcs	B470109	

Accessories for BD., DM., DP.

	Product	Ordering number	Example of use
	Short-circuiting module DMZ-V-0 For short-circuiting (and earthing) of all cores connected to base BDM/BDG. Suitable for unused wires or for maintenance and work on the line	A05818	

Notes

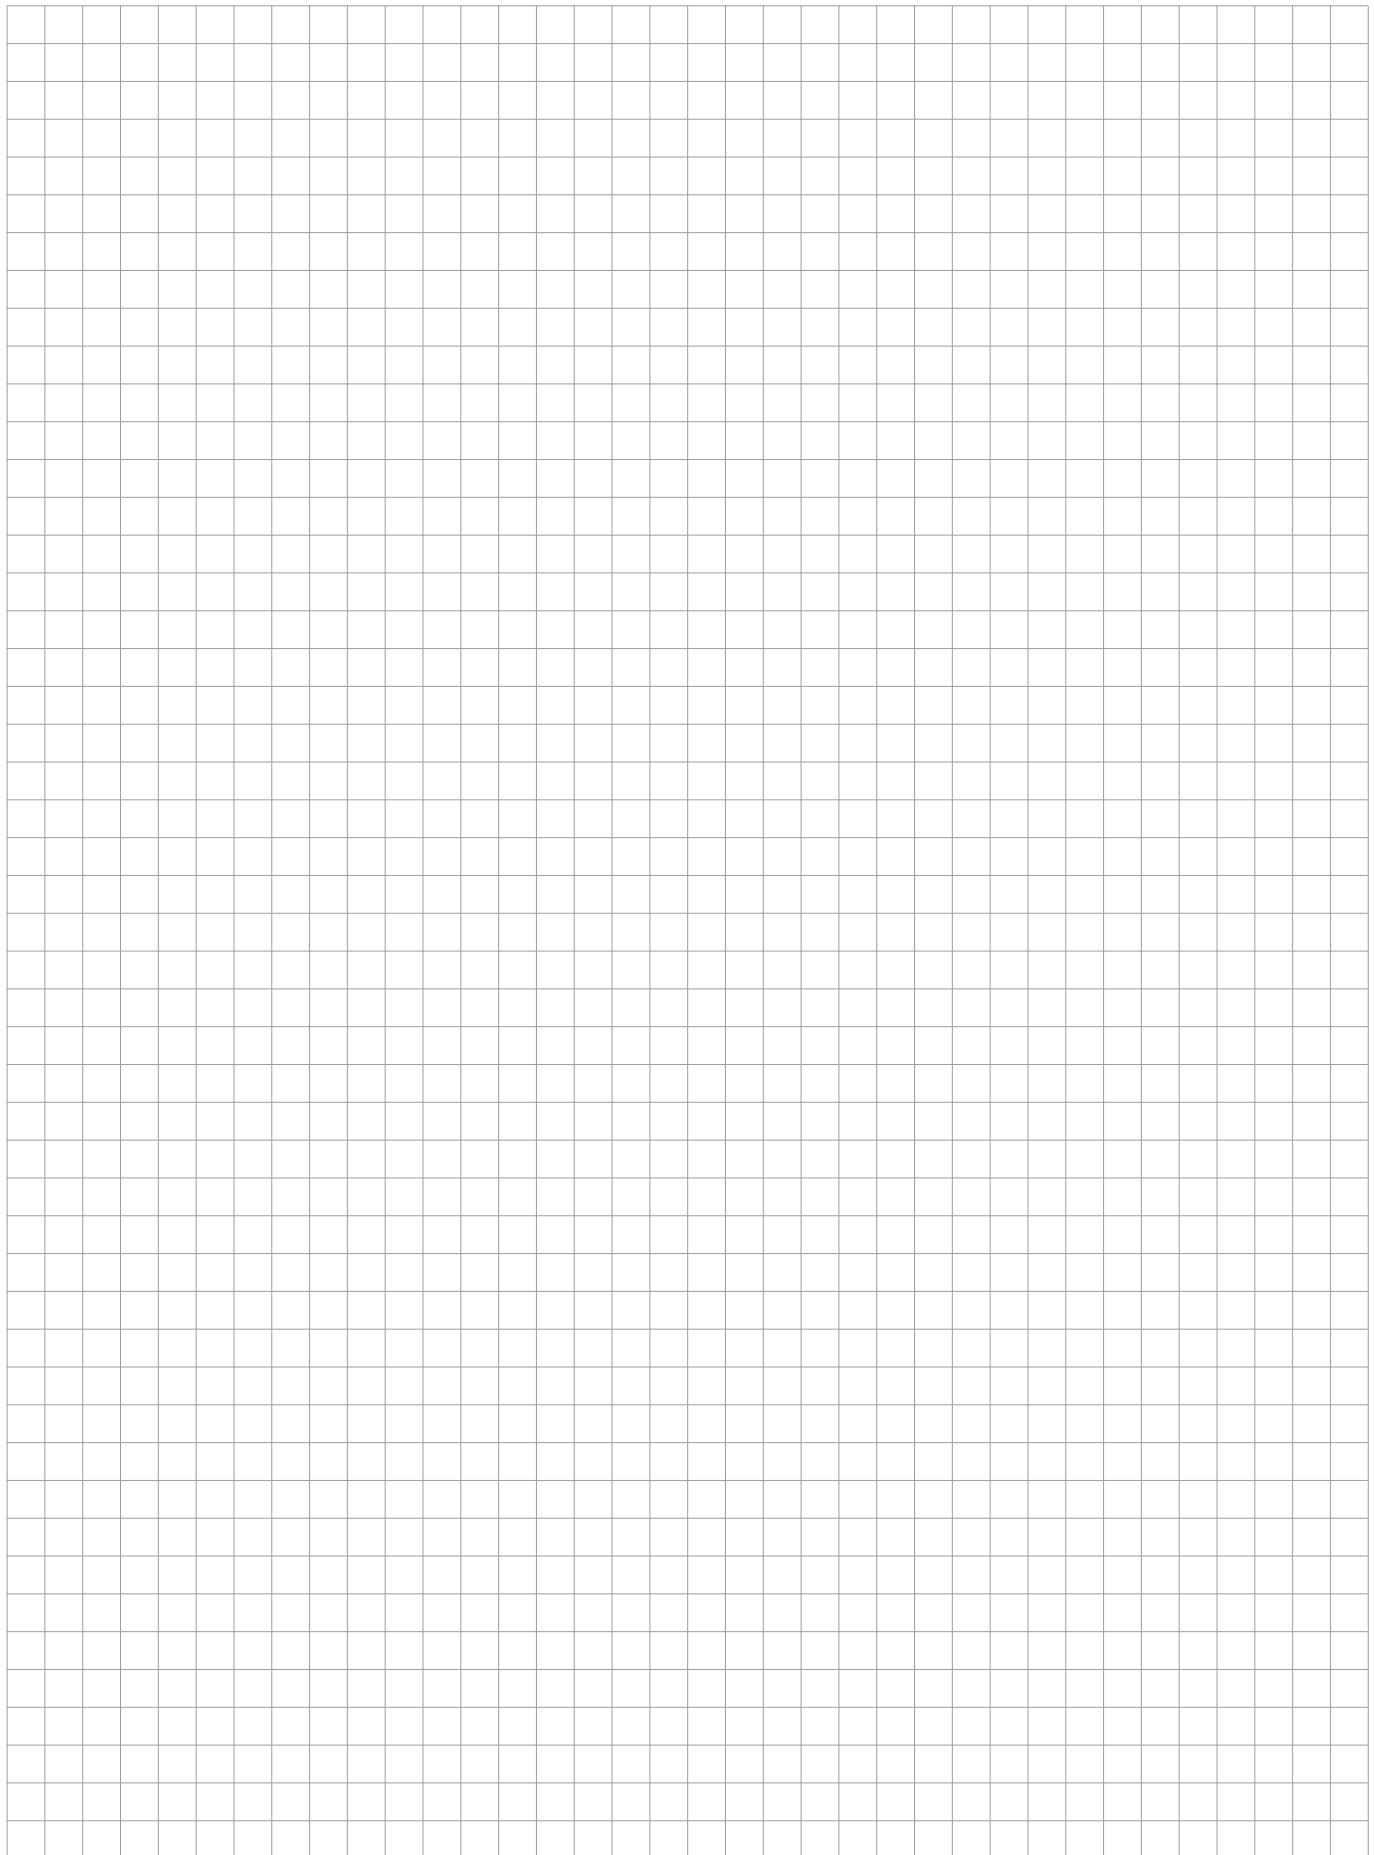

Isolating Spark Gaps ISG and ISG Ex



- Earth termination systems of power installations
- Earth termination systems of telecommunication systems
- Auxiliary earth electrodes of voltage operated earth fault circuit breakers
- Rail earth electrode of AC and DC railways
- Measuring earth electrode for laboratories
- Systems of pipeline cathodic protection
- Service entry masts for low-voltage overhead cables
- Bypassing insulated flanges and insulated couplings of pipelines.
- Ex types for ATEX:
 - II2G Ex mb IIC T6 Gb
 - II2D Ex tb IIIC T80 °C Db
- Classes:
 - N – normal duty
 - H – heavy duty


Isolating spark gaps

The isolating spark gaps of ISG series are designed to balance differential potentials on conductive non-live parts of technological equipment of buildings that are not galvanically interconnected.

In the event that a difference in potential arises between the conductive parts, the ISGs are able to interconnect the parts for a transient period of time and thus eliminate the dangerous voltage difference. The ISGs may well be used for temporary connection of different grounds which due to functional reasons cannot be galvanically linked to each other, or for bridging insulated flanges on pipes, etc.

The ISG products are designed for use in normal environments, while the ISG EX versions are designed for areas with a risk of explosion and be used e.g. in the gas or chemical industries. Due to their IP 67 protection level they can be installed both indoors and outdoors.


The ISGs are manufactured in various sparkover voltage variants. They can be used as protective elements against dangerous contact voltages (product types with switching voltages of 50 V), or for temporary interconnection of various conductive metal parts using higher switching voltages which, however, for safety reasons are not considered to be a problem.

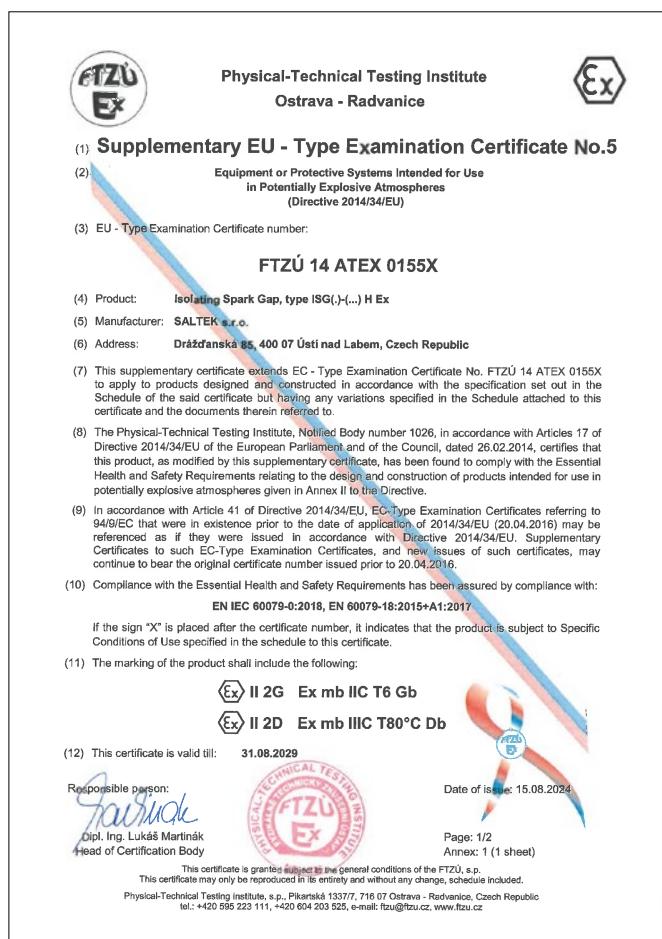

ISG-A100

Isolating Spark Gap connecting pins

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

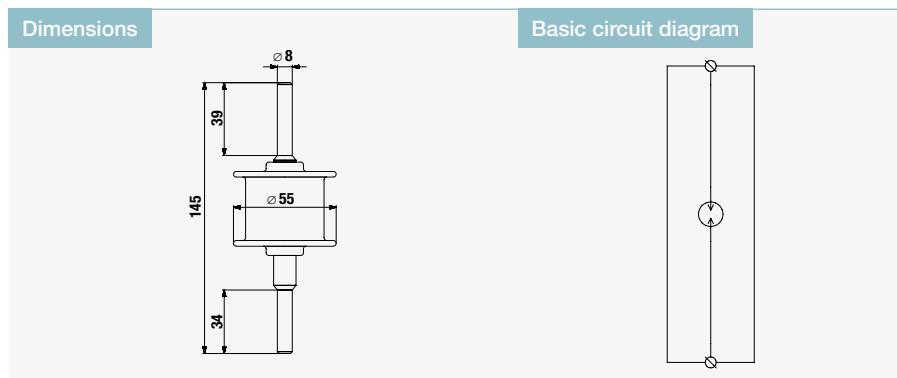


Parameter/Type	ISG-A100
Lightning impulse current I_{imp}	100 kA
Rated impulse sparkover voltage U_{rip}	5 kV
Rated power frequency withstand voltage U_{WAC}	2,5 kV
Isolation resistance	100 MΩ
Classification	class H - heavy duty
Degree of protection	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012
Ordering number	A03590

ISG-...

Isolating Spark Gap

two M8 bolts with nuts

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

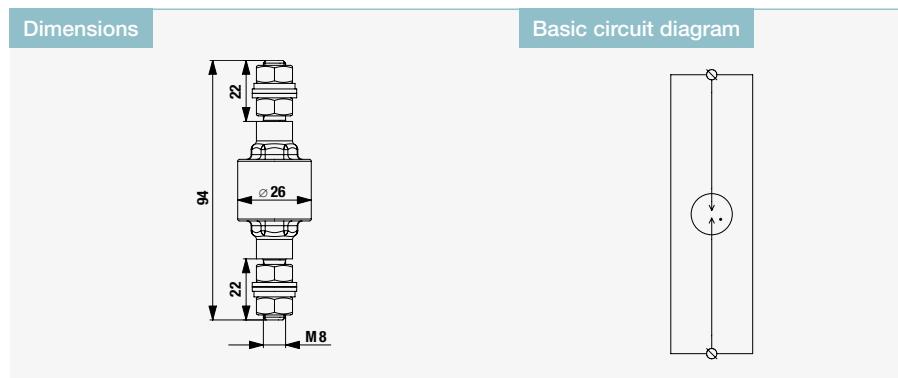


Parameter/Type	ISG-50	ISG-100	ISG-500
Lightning impulse current I_{imp}	50 kA	50 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class N - normal duty	class N - normal duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012		
Ordering number	A04086	A04078	A04127

ISGC-...

Isolating Spark Gap connecting cables

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

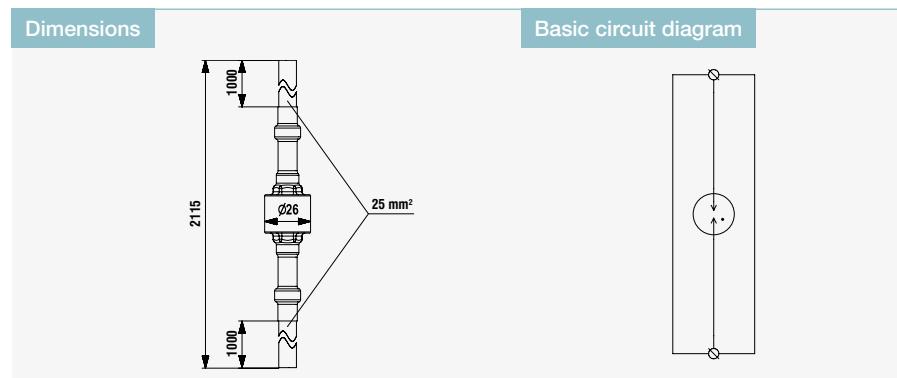



Parameter/Type	ISGC-50	ISGC-100	ISGC-500
Lightning impulse current I_{imp}	50 kA	50 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class N - normal duty	class N - normal duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C	-40 °C / 80 °C	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012		
Ordering number	A05365	A05366	A05368

ISGO-500

Isolating Spark Gap

connecting cable and M8 bolt with nut

- encapsulated high-performance isolating spark gap
- for indirect connection (earthing) of isolated conductive parts under lightning conditions, where direct connection is not allowed

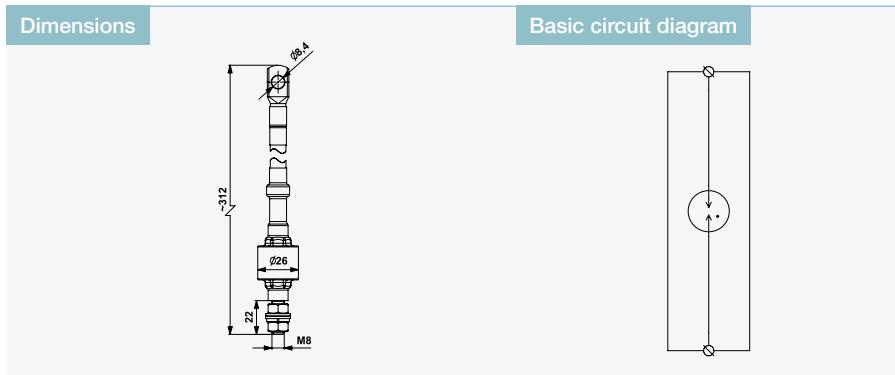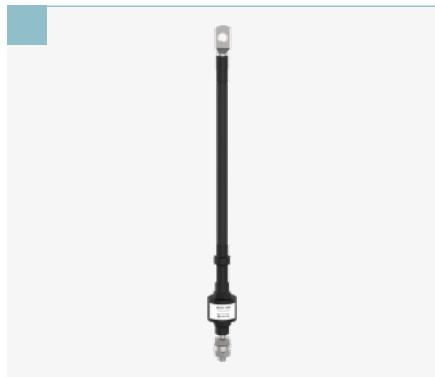


Parameter/Type	ISGO-500
Lightning impulse current I_{imp}	100 kA
Rated impulse sparkover voltage U_{rimp}	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,35 kV
Rated DC withstand voltage U_{WDC}	0,5 kV
Isolation resistance	100 MΩ
Classification	class H - heavy duty
Degree of protection	IP 67
Range of operating temperatures (min/max)	-40 °C / 80 °C
According to standard	EN 62561-3:2012, IEC 62561-3:2012
Ordering number	A05518

ISG-...H Ex

Isolating spark gaps for explosive environment (Ex)
two M8 bolts with nuts, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

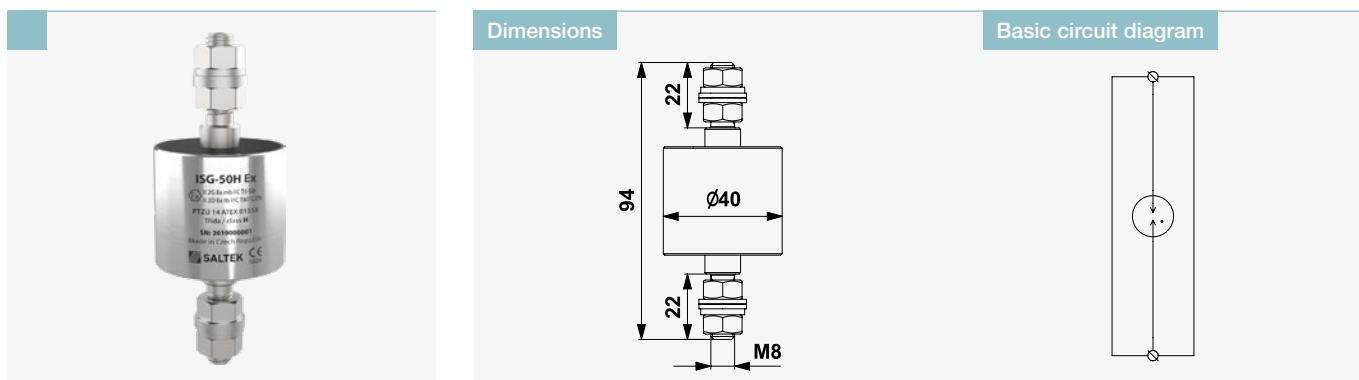


Parameter/Type	ISG-50H Ex	ISG-100H Ex	ISG-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A04131	A04132	A04109

ISGC-...H Ex

Isolating spark gaps for explosive environment (Ex)
connecting cables, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

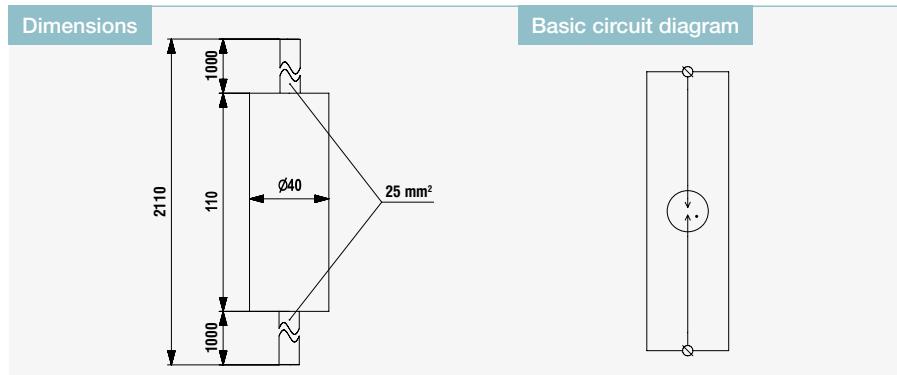


Parameter/Type	ISGC-50H Ex	ISGC-100H Ex	ISGC-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A04128	A04129	A04120

ISGO-...H Ex


Isolating spark gaps for explosive environment (Ex)
connecting cable and M8 bolt with nut, stainless steel enclosure

- heavy duty encapsulated isolating spark gap for use in Hazardous (Ex) Areas
- for indirect connection (earthing) of isolated conductive parts under lightning conditions
- for safe installation in Ex zone

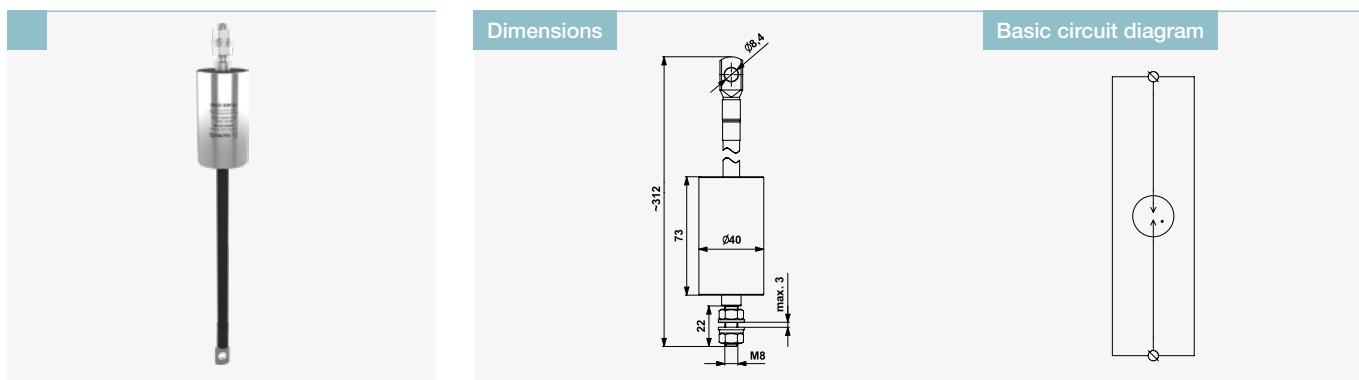

Parameter/Type	ISGO-50H Ex	ISGO-100H Ex	ISGO-500H Ex
Lightning impulse current I_{imp}	100 kA	100 kA	100 kA
Rated impulse sparkover voltage U_{rimp}	0,9 kV	0,95 kV	1,5 kV
Rated power frequency withstand voltage U_{WAC}	0,035 kV	0,07 kV	0,35 kV
Rated DC withstand voltage U_{WDC}	0,05 kV	0,1 kV	0,5 kV
Isolation resistance	100 MΩ	100 MΩ	100 MΩ
Classification	class H - heavy duty	class H - heavy duty	class H - heavy duty
Degree of protection	IP 67	IP 67	IP 67
Range of operating temperatures (min/max)	-40 °C / 50 °C	-40 °C / 50 °C	-40 °C / 50 °C
According to standard	EN 62561-3, EN 60079-0, EN 60079-18, EN 60079-31		
Explosion-tested version	II 2G Ex mb IIC T6 Gb, II 2D Ex tb IIIC T80°C Db		
Ordering number	A06142	A06143	A05514

Notes

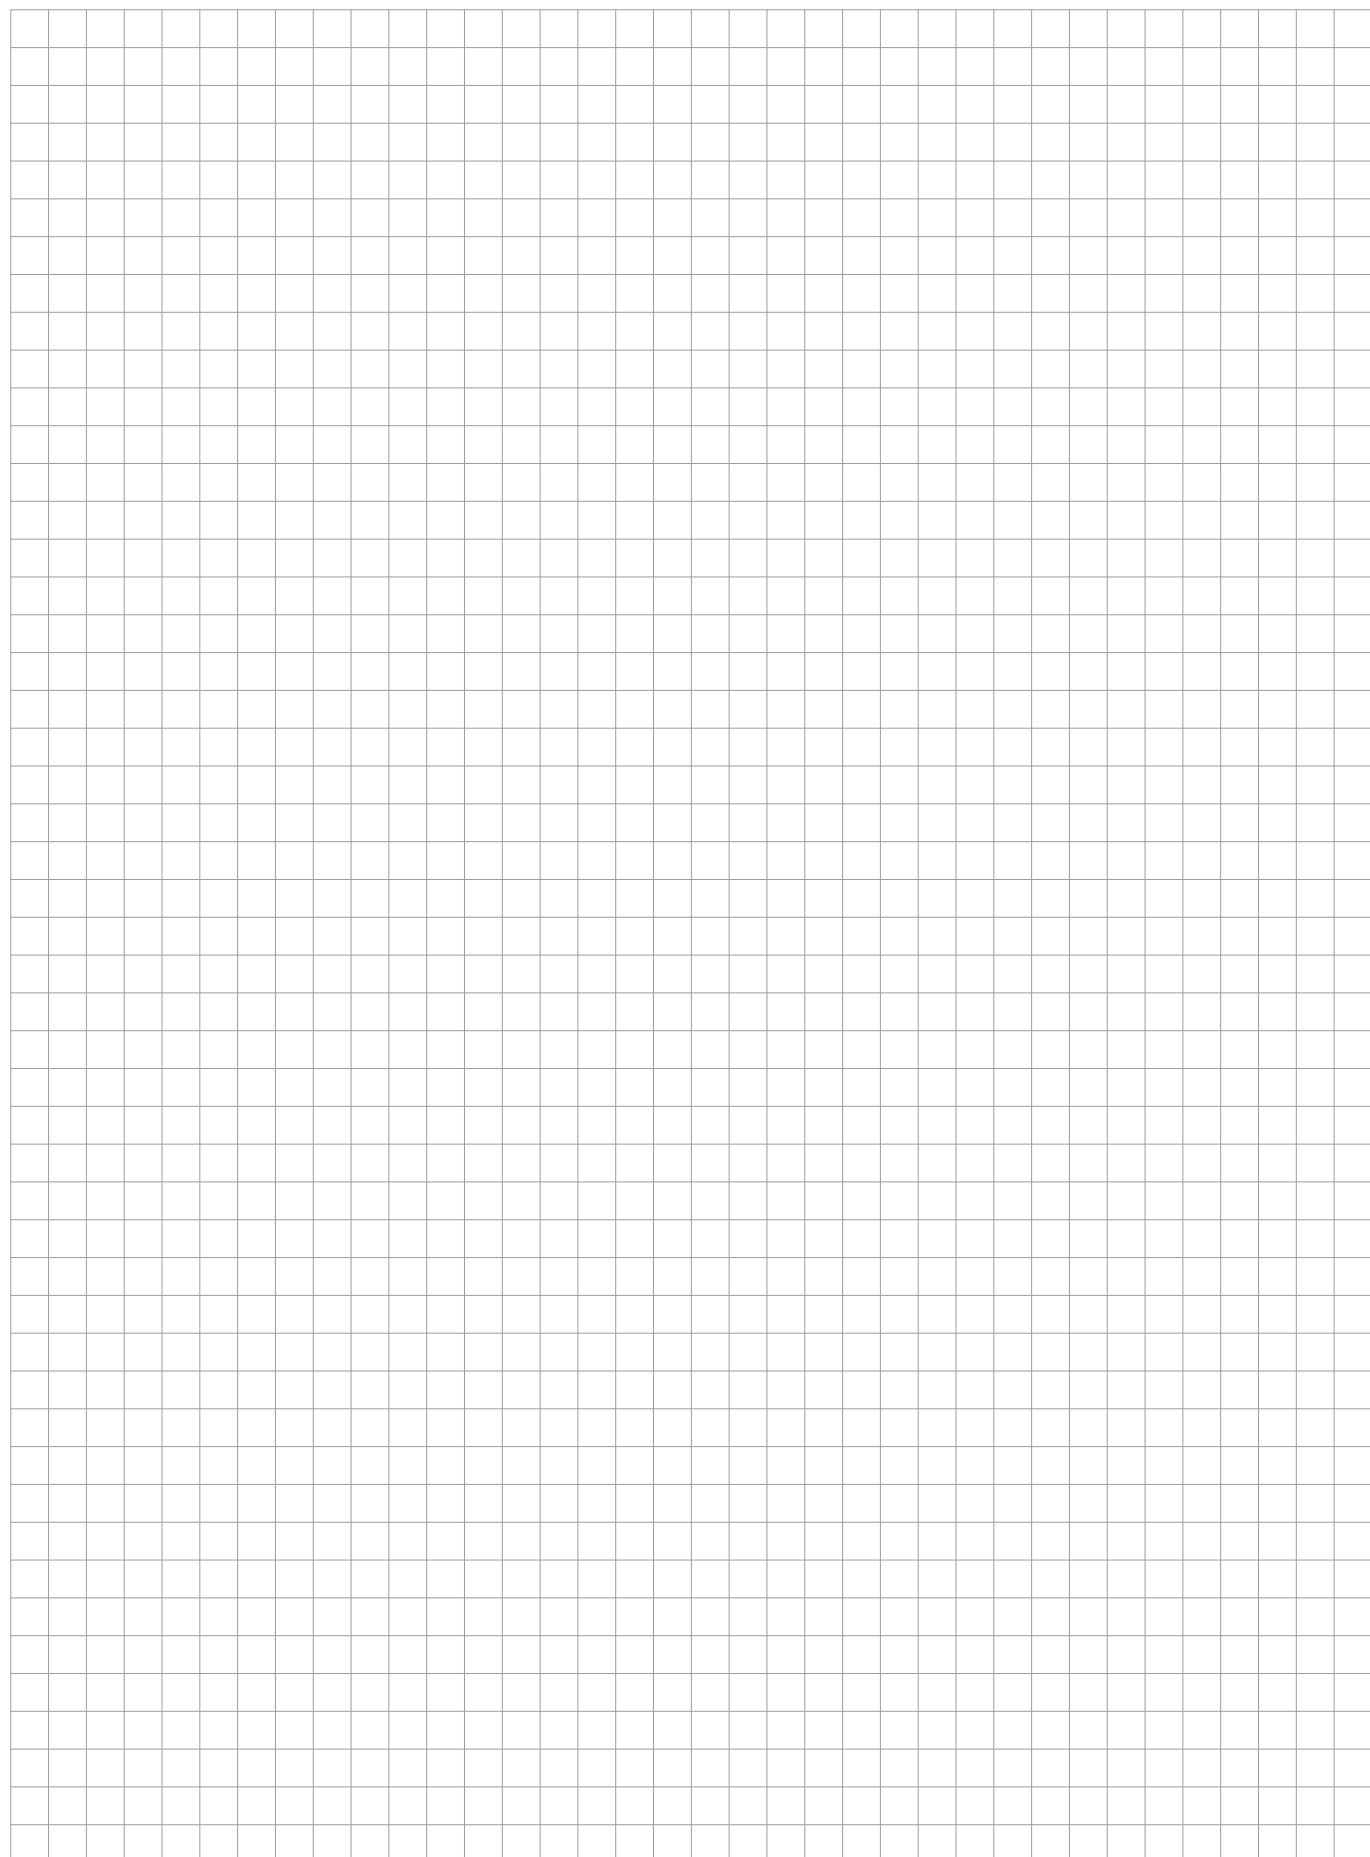

Digital SPD tester



GIGATESTpro-SALTEK

Measuring instrument for SPD control

Test tips

- Tester SPDs (MOVs or GDTs)
- Measurements of insulation resistance
- Measurement of voltage
- The database of SPDs in the instrument
- Easy test result
- Measurement protection by detecting the presence of voltage



Parameter	GIGATESTpro - SALTEK
Test of SPDs	
Measuring range	40 V ÷ 1 050 V
Resolution	1 V
Reference error	± (2% R + 2 D)*
Measuring principle	Increasing DC voltage and simultaneously measures the 1 mA current through the SPD
Insulation resistance	
Measuring range	0,100 MΩ ÷ 9,999 GΩ (U = 50 V ÷ 1 000 V)
Nominal test current	≥ 1 mA
Automatic discharge of tested object	yes
DC and AC voltage (TRMS)	
Measuring range	0 V ÷ 600 V DC / AC (45 Hz ÷ 65 Hz)
Resolution	1 V
Reference error	± (2% R + 2 D)*
Power supply	4x AAA alkaline battery 1,5 V or NiMH accumulator 1,2 V
Display	High contrast bright multicolour graphic OLED
Oversupply category	CAT III / 300 V or CAT II / 600 V
Ordering number	B00010

* R: reading, D: digit

Index of SALTEK® products – by type

Type	Ordering number	Page
BD-090-T	A05821	139
BD-090-T/V/2-16	A05550	115
BD-090-T/V/2-F16	A05551	115
BD-250-T	A05822	139
BD-250-T/V/2-16	A05554	115
BD-250-T/V/2-F16	A05555	115
BDG-006-V/1-4FR1	A06467	127
BDG-006-V/1-FR1	A05704	120
BDG-006-V/1-FR2	A06469	122
BDG-006-V/2-FR1	A06472	123
BDG-012-V/1-4FR1	A06475	127
BDG-012-V/1-FR1	A05705	120
BDG-012-V/1-FR2	A06477	122
BDG-012-V/2-FR1	A06480	123
BDG-024-V/1-4FR1	A06483	127
BDG-024-V/1-FR1	A05706	120
BDG-024-V/1-FR2	A06485	122
BDG-024-V/2-FR1	A06488	123
BDG-048-V/1-4FR1	A06491	127
BDG-048-V/1-FR1	A05707	120
BDG-048-V/1-FR2	A06493	122
BDG-048-V/2-FR1	A06496	123
BDG-060-V/1-FR1	A06499	121
BDG-060-V/1-FR2	A06500	122
BDG-060-V/2-FR1	A06504	123
BDG-230-V/1-FR	A05708	121
BDG-230-V/1-FR1	A06514	121
BDG-230-V/2-FR	A06517	123
BDGHF-006-V/1-FR1	A06520	130
BDGHF-006-V/2-FR1	A06523	131
BDGHF-012-V/1-FR1	A06526	130
BDGHF-012-V/2-FR1	A06529	131
BDGHF-024-V/1-FR1	A06532	130
BDGHF-024-V/2-FR1	A06535	131
BDGHF-230-V/1-FR	A06538	130
BDGHF-230-V/2-FR1	A06541	131
BDM-006-V/1-FR1	A05709	116
BDM-006-V/1-FR2	A06385	118
BDM-006-V/2-FR1	A06388	119
BDM-006-V/2-JFR1	A06390	124
BDM-006-V/2-JFR2	A06391	124
BDM-006-V/4-JFR1	A06396	126
BDM-012-V/1-FR1	A05710	116
BDM-012-V/1-FR2	A06398	118
BDM-012-V/2-FR1	A06401	119
BDM-012-V/2-JFR1	A06403	124
BDM-012-V/2-JFR2	A06404	124
BDM-012-V/4-JFR1	A06409	126
BDM-024-V/1-FR1	A05711	116
BDM-024-V/1-FR2	A06411	118
BDM-024-V/2-FR1	A06414	119
BDM-024-V/2-JFR1	A06416	125
BDM-024-V/2-JFR2	A06417	125
BDM-024-V/4-JFR1	A06422	126
BDM-048-V/1-FR1	A05712	116
BDM-048-V/1-FR2	A06424	118
BDM-048-V/2-FR1	A06427	119
BDM-048-V/2-JFR1	A06429	125
BDM-048-V/2-JFR2	A06430	125
BDM-048-V/4-JFR1	A06435	126
BDM-060-V/1-FR1	A06438	117
BDM-060-V/1-FR2	A06439	118
BDM-060-V/2-FR1	A06443	119
BDM-230-V/1-FR	A05713	117

Type	Ordering number	Page
BDM-230-V/1-FR1	A06461	117
BDM-230-V/2-FR	A06464	119
BDMHF-006-V/1-4FR1	A06545	129
BDMHF-006-V/1-FR1	A06547	128
BDMHF-024-V/1-4FR1	A06551	129
BDMHF-024-V/1-FR1	A06553	128
Cap for DL-PL-RACK-1U	A04163	179
CZ-275-A	A06737	83
DA-075-DJ25	A06094	75
DA-150-DJ25	A06095	75
DA-275-BFG	A00629	79
DA-275-CZS	A01916	84
DA-275-DFI 1	A01205	80
DA-275-V/1+1	A01872	72
DA-275-V/1S+1	A01975	72
DA-275-V/3+1	A01848	73
DA-275-V/3S+1	A01849	73
DA-275-A	A06738	85
DA-275-BFI2	A06262	82
DA-275-DF10	A05719	77
DA-275-DF10-S	A05720	78
DA-275-DF16	A05721	77
DA-275-DF16-S	A05722	78
DA-275-DF2	A05715	77
DA-275-DF2-S	A05716	78
DA-275-DF6	A05717	77
DA-275-DF6-S	A05718	78
DA-275-DFi10	A05724	81
DA-275-DFi16	A05725	81
DA-275-DFi6	A05723	81
DA-275-DJ25	A05770	76
DA-275-DJ25-S	A05771	76
DA-275-S	A06739	86
DA-320-LED	A06740	96
DL-10G-60V-PoE	A07070	175
DL-10G-60V-PoE-M	A07086	183
DL-10G-PoE-IP66	A07098	174
DL-10G-PoE-M	A04181	182
DL-10G-RJ45-PoE-AB	A06149	173
DL-1G-60V-PoE	A07069	175
DL-1G-60V-PoE-M	A07085	183
DL-1G-POE-INJECTOR	A06620	176
DL-1G-PoE-M	A04165	182
DL-1G-POE-PCB-INJECTOR	A06570	185
DL-1G-RJ45-PoE-AB	A06148	173
DL-Cat. 6A	A07108	172
DL-Cat. 6A-60V	A06574	172
DL-Cat. 6A-60V-M	A04210	181
DL-Cat. 6A-60V-R-M	A04209	181
DL-Cat. 6A-M	A04196	180
DL-Cat. 6A-R-M	A04184	180
DL-CS-RACK-1U-INJECTOR	A06569	184
DL-ISDN RJ45	A03382	170
DL-PL-RACK-1U	A04180	179
DL-RS DD9	A00968	146
DL-TLF-UHF	A07084	168
DL-VDSL3	A07120	169
DM-006/1 3L DJ	A01402	143
DM-006/1 3R DJ	A01350	142
DM-006/1 4R DJ	A01675	144
DM-006/1 R-DJ	A06726	140
DM-006/1 RB	A06057	161
DM-006/1 RS	A05140	153
DM-012/1 3L DJ	A02094	143

Type	Ordering number	Page
DM-012/1 3R DJ	A01349	142
DM-012/1 4R DJ	A01689	144
DM-012/1-L2-DJ	A06731	141
DM-012/1-R-DJ	A06727	140
DM-012/1-RB	A06058	161
DM-012/1-RS	A05141	153
DM-024/1 3L DJ	A01519	143
DM-024/1 3R DJ	A01234	142
DM-024/1 4R DJ	A01357	144
DM-024/1-L2-DJ	A06732	141
DM-024/1-R-DJ	A06728	140
DM-024/1-RB	A06059	161
DM-024/1-RS	A05142	153
DM-048/1-L2-DJ	A06733	141
DM-048/1-R-DJ	A06729	140
DM-048/1-RB	A06060	161
DM-048/1-RS	A05143	153
DM-060/1-RS	A05129	153
DMG-006/1-RB	A06061	162
DMG-006/1-RS	A05132	154
DMG-012/1-RS	A05133	154
DMG-024-V/1-4FR1-DIF	A06281	132
DMG-024/1-RB	A06062	162
DMG-024/1-RS	A05134	154
DMG-048/1-RB	A06063	162
DMG-048/1-RS	A05135	154
DMG-060/1-RS	A05136	154
DMHF-006/1-RB	A06064	164
DMHF-006/1-RS	A05138	156
DMHF-015/1-RB	A06290	164
DMHF-015/1-RS	A05139	156
DMJ-012/2-RB	A06065	163
DMJ-012/2-RS	A05144	155
DMJ-024/2-RB	A06066	163
DMJ-024/2-RS	A05145	155
DMJ-048/2-RB	A06067	163
DMJ-048/2-RS	A05131	155
DMJ-060/2-RS	A05146	155
DMLF-024/1-RB	A06069	165
DMLF-024/1-RS	A05333	157
DMP-012-V/1-FR1	A05798	133
DMP-012-V/1-JFR1	A05802	134
DMP-024-V/1-FR1	A05799	133
DMP-024-V/1-JFR1	A05803	134
DMS-024-T	A06596	145
DMS-048-T	A06597	145
DP-012-25	A06096	147
DP-012-V/1-F16	A05664	135
DP-024-25	A06097	147
DP-024-V/1-F16	A05665	135
DP-048-25	A06098	147
DP-048-V/1-F16	A05666	135
DPF-012DC-16	A06635	148
DPF-012DC-16-S	A06664	149
DPF-024DC-16	A06636	148
DPF-024DC-16-S	A06665	149
DPF-048DC-16	A06637	148
DPF-048DC-16-S	A06666	149
DS-B090-RB	A06070	166
DS-B090-RS	A05148	158
DS-D024-RS	A05153	158
DS-V130-RS	A05151	158
FLP-12,5 V/1	A03421	43
FLP-12,5 V/1 S	A03422	43

Index of SALTEK® products – by type

Type	Ordering number	Page
FLP-12,5 V/1+1	A03423	45
FLP-12,5 V/1S+1	A03424	45
FLP-12,5 V/2	A03809	46
FLP-12,5 V/2 S	A05182	46
FLP-12,5 V/3	A03425	48
FLP-12,5 V/3 S	A03426	48
FLP-12,5 V/3+1	A03427	50
FLP-12,5 V/3S+1	A03428	50
FLP-12,5 V/4	A03429	49
FLP-12,5 V/4 S	A03430	49
FLP-12,5-075-VH/1	A04168	44
FLP-12,5-075-VH/1S	A04169	44
FLP-12,5-075-VH/2	A04170	47
FLP-12,5-075-VH/2S	A04171	47
FLP-25-T1-V/1	A06263	25
FLP-25-T1-V/1+1	A06257	26
FLP-25-T1-V/2	A06259	27
FLP-25-T1-V/3	A05300	28
FLP-25-T1-V/3+1	A05304	30
FLP-25-T1-V/4	A05302	29
FLP-25-T1-VS/1	A06264	25
FLP-25-T1-VS/1+1	A06258	26
FLP-25-T1-VS/2	A06260	27
FLP-25-T1-VS/3	A05301	28
FLP-25-T1-VS/3+1	A05305	30
FLP-25-T1-VS/4	A05303	29
FLP-25-T1-VSF/1	A07112	21
FLP-25-T1-VSF/3	A07113	22
FLP-25-T1-VSF/3+1	A07114	23
FLP-25-T1-VSF/4	A07115	24
FLP-A100 VS/NPE	A03574	31
FLP-A50 VS/NPE	A03573	31
FLP-B+C MAXI V/1	A05091	36
FLP-B+C MAXI V/1+1	A05095	37
FLP-B+C MAXI V/2	A05092	38
FLP-B+C MAXI V/3	A05093	39
FLP-B+C MAXI V/3+1	A05096	41
FLP-B+C MAXI V/4	A05094	40
FLP-B+C MAXI VS/1	A03533	36
FLP-B+C MAXI VS/1+1	A03783	37
FLP-B+C MAXI VS/2	A03784	38
FLP-B+C MAXI VS/3	A03570	39
FLP-B+C MAXI VS/3+1	A03572	41
FLP-B+C MAXI VS/4	A03571	40
FLP-B+C-MAXI-VSF/1	A07116	32
FLP-B+C-MAXI-VSF/3	A07117	33
FLP-B+C-MAXI-VSF/3+1	A07118	34
FLP-B+C-MAXI-VSF/4	A07119	35
FLP-EV12,5-VBH/1S+1	A07043	42
FLP-EV12,5-VBH/3S+1	A07049	42
FLP-PV1000/Y	A04201	101
FLP-PV1000/YS	A04198	101
FLP-PV1500/Y	A04200	101
FLP-PV1500/YS	A04197	101
FLP-PV275 V/U	A07407	99
FLP-PV550 V/U	A06145	100
FLP-PV550 V/U S	A06146	100
FLP-SG50 V/1	A04054	20
FLP-SG50 VS/1	A04053	20
FX-090 B75 T F/F	A03385	193
FX-090 F75 T F/F	A03387	193
FX-090-F75 F/F	A04212	194
FX-230 F75 T F/F	A03392	193
GIGATESTpro - SALTEK	B00010	210

Type	Ordering number	Page
HX-090 N50 F/F	A03405	190
HX-090 N50 F/M	A03346	190
HX-090 SMA F/M	A04134	189
HX-230 N50 F/F	A03511	190
HX-230 N50 F/M	A03510	190
HX-350-N50 F/F	A06703	191
HX-350-N50 F/M	A06704	191
HX-470-N50 F/F	A06555	191
HX-470-N50 F/M	A06556	191
ISG-100	A04078	202
ISG-100H Ex	A04132	205
ISG-50	A04086	202
ISG-500	A04127	202
ISG-500H Ex	A04109	205
ISGC-50	A05365	203
ISGC-500	A05368	203
ISGC-500H Ex	A04120	206
ISGC-50H Ex	A04128	206
ISGO-100H Ex	A06143	207
ISGO-500	A05518	204
ISGO-500H Ex	A05514	207
ISGO-50H Ex	A06142	207
RACK-PROTECTOR-EURO-X12-1U	A05961	87
RACK-PROTECTOR-EURO-X12-1U-5	A07008	88
RACK-PROTECTOR-EURO-X12-1U-PI	A06256	89
RACK-PROTECTOR-F6-1U	A05874	87
RACK-PROTECTOR-VF5-1U	A05875	87
RACK-PROTECTOR-VX7-1U	A05873	87
RACK-PROTECTOR-X8-1U	A05872	87
RACK-PROTECTOR-X8-1U-5	A07009	88
RACK-PROTECTOR-X8-1U-PI	A06255	89
RTO-16	A04177	90
RTO-35	A04178	90
SLP-075 V/1	A01815	54
SLP-075 V/1 S	A01823	55
SLP-075 V/2	A07022	57
SLP-075 V/2 S	A07023	57
SLP-075-VB/1	A07051	64
SLP-075-VB/1S	A07052	65
SLP-150 V/1	A05185	54
SLP-150 V/1 S	A05186	55
SLP-150-VB/1	A07053	64
SLP-150-VB/1S	A07054	65
SLP-275 V/1	A01617	54
SLP-275 V/1 S	A01618	55
SLP-275 V/1+1	A01948	56
SLP-275 V/1S+1	A02491	56
SLP-275 V/2	A01619	57
SLP-275 V/2 S	A05183	57
SLP-275 V/3	A01760	58
SLP-275 V/3 S	A01761	58
SLP-275 V/3+1	A01946	60
SLP-275 V/3S+1	A02002	60
SLP-275 V/4	A01722	59
SLP-275 V/4 S	A01763	59
SLP-275-VB/1	A07055	64
SLP-275-VB/1+1	A07057	66
SLP-275-VB/1S	A07056	65

Type	Ordering number	Page
SLP-275-VB/1S+1	A07058	66
SLP-275-VB/3+1	A07059	67
SLP-275-VB/3S+1	A07060	67
SLP-385 V/1	A01955	54
SLP-385 V/1 S	A02771	55
SLP-385 V/3	A01952	61
SLP-385 V/3 S	A02633	62
SLP-440 V/1	A01817	54
SLP-440 V/1 S	A01825	55
SLP-440 V/3	A01910	61
SLP-440 V/3 S	A01913	62
SLP-600 V/1	A03301	54
SLP-600 V/1 S	A03302	55
SLP-600 V/3	A06076	61
SLP-600 V/3 S	A06305	62
SLP-600-V/3YS-IT	A04199	63
SLP-NPE V/1	A03012	68
SLP-PV1000 V/Y	A04302	103
SLP-PV1000 V/Y S	A04303	103
SLP-PV1500 V/Y	A04304	103
SLP-PV1500 V/Y S	A04305	103
SLP-PV170 V/U	A03662	102
SLP-PV170 V/U S	A03663	102
SLP-PV500 V/U	A03664	102
SLP-PV500 V/U S	A03665	102
SLP-PV700 V/Y	A04300	103
SLP-PV700 V/Y S	A04301	103
SP-T2+T3-320/Y-CCC-LED	A06245	95
SP-T2+T3-320/Y-CCT-LED	A06243	95
SP-T2+T3-320/Y-CLC-LED	A06246	94
SP-T2+T3-320/Y-CLT-LED	A06044	94
SP-T2+T3-320/Y-TLC-LED	A06247	94
SP-T2+T3-320/Y-TLT-LED	A06244	94
SP-T2+T3-320/Y-TTC-LED	A06248	95
SP-T2+T3-320/Y-TTT-LED	A06222	95
SX-090-B50 F/F	A04157	195
SX-090-F75 F/F	A04158	196
VL-B75 F/F	A03376	188
ZX-0,44-N50-F/F	A06207	192

Index of SALTEK® products – by order number

Ordering number	Type	Page
A00629	DA-275 BFG	79
A00968	DL-RS DD9	146
A01205	DA-275 DFI 1	80
A01234	DM-024/1 3R DJ	142
A01349	DM-012/1 3R DJ	142
A01350	DM-006/1 3R DJ	142
A01357	DM-024/1 4R DJ	144
A01402	DM-006/1 3L DJ	143
A01519	DM-024/1 3L DJ	143
A01617	SLP-275 V/1	54
A01618	SLP-275 V/1 S	55
A01619	SLP-275 V/2	57
A01675	DM-006/1 4R DJ	144
A01689	DM-012/1 4R DJ	144
A01722	SLP-275 V/4	59
A01760	SLP-275 V/3	58
A01761	SLP-275 V/3 S	58
A01763	SLP-275 V/4 S	59
A01815	SLP-075 V/1	54
A01817	SLP-440 V/1	54
A01823	SLP-075 V/1 S	55
A01825	SLP-440 V/1 S	55
A01848	DA-275 V/3+1	73
A01849	DA-275 V/3S+1	73
A01872	DA-275 V/1+1	72
A01910	SLP-440 V/3	61
A01913	SLP-440 V/3 S	62
A01916	DA-275 CZS	84
A01946	SLP-275 V/3+1	60
A01948	SLP-275 V/1+1	56
A01952	SLP-385 V/3	61
A01955	SLP-385 V/1	54
A01975	DA-275 V/1S+1	72
A02002	SLP-275 V/3S+1	60
A02094	DM-012/1 3L DJ	143
A02491	SLP-275 V/1S+1	56
A02633	SLP-385 V/3 S	62
A02771	SLP-385 V/1 S	55
A03012	SLP-NPE V/1	68
A03301	SLP-600 V/1	54
A03302	SLP-600 V/1 S	55
A03346	HX-090 N50 F/M	190
A03376	VL-B75 F/F	188
A03382	DL-ISDN RJ45	170
A03385	FX-090 B75 T F/F	193
A03387	FX-090 F75 T F/F	193
A03392	FX-230 F75 T F/F	193
A03405	HX-090 N50 F/F	190
A03421	FLP-12,5 V/1	43
A03422	FLP-12,5 V/1 S	43
A03423	FLP-12,5 V/1+1	45
A03424	FLP-12,5 V/1S+1	45
A03425	FLP-12,5 V/3	48
A03426	FLP-12,5 V/3 S	48
A03427	FLP-12,5 V/3+1	50
A03428	FLP-12,5 V/3S+1	50
A03429	FLP-12,5 V/4	49
A03430	FLP-12,5 V/4 S	49
A03510	HX-230 N50 F/M	190
A03511	HX-230 N50 F/F	190
A03533	FLP-B+C MAXI VS/1	36
A03570	FLP-B+C MAXI VS/3	39
A03571	FLP-B+C MAXI VS/4	40
A03572	FLP-B+C MAXI VS/3+1	41

Ordering number	Type	Page
A03573	FLP-A50N VS/NPE	31
A03574	FLP-A100N VS/NPE	31
A03590	ISG-A100	201
A03662	SLP-PV170 V/U	102
A03663	SLP-PV170 V/U S	102
A03664	SLP-PV500 V/U	102
A03665	SLP-PV500 V/U S	102
A03783	FLP-B+C MAXI VS/1+1	37
A03784	FLP-B+C MAXI VS/2	38
A03809	FLP-12,5 V/2	46
A04053	FLP-SG50 VS/1	20
A04054	FLP-SG50 V/1	20
A04078	ISG-100	202
A04086	ISG-50	202
A04109	ISG-500H Ex	205
A04120	ISGC-500H Ex	206
A04127	ISG-500	202
A04128	ISGC-50H Ex	206
A04129	ISGC-100H Ex	206
A04131	ISG-50H Ex	205
A04132	ISG-100H Ex	205
A04134	HX-090 SMA F/M	189
A04157	SX-090-B50 F/F	195
A04158	SX-090-F75 F/F	196
A04163	Cap for DL-PL-RACK-1U	179
A04165	DL-1G-PoE-M	182
A04168	FLP-12,5-075-VH/1	44
A04169	FLP-12,5-075-VH/1S	44
A04170	FLP-12,5-075-VH/2	47
A04171	FLP-12,5-075-VH/2S	47
A04177	RTO-16	90
A04178	RTO-35	90
A04180	DL-PL-RACK-1U	179
A04181	DL-10G-PoE-M	182
A04184	DL-Cat.6A-R-M	180
A04196	DL-Cat.6A-M	180
A04197	FLP-PV1500/YS	101
A04198	FLP-PV1000/YS	101
A04199	SLP-600-V/3YS-IT	63
A04200	FLP-PV1500/Y	101
A04201	FLP-PV1000/Y	101
A04209	DL-Cat.6A-60V-R-M	181
A04210	DL-Cat.6A-60V-M	181
A04212	FX-090-F75 F/F	194
A04300	SLP-PV700 V/Y	103
A04301	SLP-PV700 V/Y S	103
A04302	SLP-PV1000 V/Y	103
A04303	SLP-PV1000 V/Y S	103
A04304	SLP-PV1500 V/Y	103
A04305	SLP-PV1500 V/Y S	103
A05091	FLP-B+C MAXI V/1	36
A05092	FLP-B+C MAXI V/2	38
A05093	FLP-B+C MAXI V/3	39
A05094	FLP-B+C MAXI V/4	40
A05095	FLP-B+C MAXI V/1+1	37
A05096	FLP-B+C MAXI V/3+1	41
A05129	DM-060/1-RS	153
A05131	DMJ-048/2-RS	155
A05132	DMG-006/1-RS	154
A05133	DMG-012/1-RS	154
A05134	DMG-024/1-RS	154
A05135	DMG-048/1-RS	154
A05136	DMG-060/1-RS	154
A05138	DMHF-006/1-RS	156

Ordering number	Type	Page
A05139	DMHF-015/1-RS	156
A05140	DM-006/1-RS	153
A05141	DM-012/1-RS	153
A05142	DM-024/1-RS	153
A05143	DM-048/1-RS	153
A05144	DMJ-012/2-RS	155
A05145	DMJ-024/2-RS	155
A05146	DMJ-060/2-RS	155
A05148	DS-B090-RS	158
A05151	DS-V130-RS	158
A05153	DS-D024-RS	158
A05182	FLP-12,5 V/2 S	46
A05183	SLP-275 V/2 S	57
A05185	SLP-150 V/1	54
A05186	SLP-150 V/1 S	55
A05300	FLP-25-T1-V/3	28
A05301	FLP-25-T1-VS/3	28
A05302	FLP-25-T1-V/4	29
A05303	FLP-25-T1-VS/4	29
A05304	FLP-25-T1-V/3+1	30
A05305	FLP-25-T1-VS/3+1	30
A05333	DMLF-024/1-RS	157
A05365	ISGC-50	203
A05366	ISGC-100	203
A05368	ISGC-500	203
A05514	ISGO-500H Ex	207
A05518	ISGO-500	204
A05550	BD-090-T/V/2-16	115
A05551	BD-090-T/V/2-F16	115
A05554	BD-250-T/V/2-16	115
A05555	BD-250-T/V/2-F16	115
A05664	DP-012-V/1-F16	135
A05665	DP-024-V/1-F16	135
A05666	DP-048-V/1-F16	135
A05704	BDG-006/V/1-FR1	120
A05705	BDG-012/V/1-FR1	120
A05706	BDG-024/V/1-FR1	120
A05707	BDG-048/V/1-FR1	120
A05708	BDG-230/V/1-FR	121
A05709	BDM-006/V/1-FR1	116
A05710	BDM-012/V/1-FR1	116
A05711	BDM-024/V/1-FR1	116
A05712	BDM-048/V/1-FR1	116
A05713	BDM-230/V/1-FR	117
A05715	DA-275-DF2	77
A05716	DA-275-DF2-S	78
A05717	DA-275-DF6	77
A05718	DA-275-DF6-S	78
A05719	DA-275-DF10	77
A05720	DA-275-DF10-S	78
A05721	DA-275-DF16	77
A05722	DA-275-DF16-S	78
A05723	DA-275-DFi6	81
A05724	DA-275-DFi10	81
A05725	DA-275-DFi16	81
A05770	DA-275-DJ25	76
A05771	DA-275-DJ25-S	76
A05798	DMP-012/V/1-FR1	133
A05799	DMP-024/V/1-FR1	133
A05802	DMP-012/V/1-JFR1	134
A05803	DMP-024/V/1-JFR1	134
A05821	BD-090-T	139
A05822	BD-250-T	139
A05872	RACK-PROTECTOR-X8-1U	87

Index of SALTEK® products – by order number


Ordering number	Type	Page
A05873	RACK-PROTECTOR-VX7-1U	87
A05874	RACK-PROTECTOR-F6-1U	87
A05875	RACK-PROTECTOR-VF5-1U	87
A05961	RACK-PROTECTOR-EURO-X12-1U	87
A06044	SP-T2+T3-320/Y-CLT-LED	94
A06057	DM-006/1-RB	161
A06058	DM-012/1-RB	161
A06059	DM-024/1-RB	161
A06060	DM-048/1-RB	161
A06061	DMG-006/1-RB	162
A06062	DMG-024/1-RB	162
A06063	DMG-048/1-RB	162
A06064	DMHF-006/1-RB	164
A06065	DMJ-012/2-RB	163
A06066	DMJ-024/2-RB	163
A06067	DMJ-048/2-RB	163
A06069	DMLF-024/1-RB	165
A06070	DS-B090-RB	166
A06076	SLP-600 V/3	61
A06094	DA-075-DJ25	75
A06095	DA-150-DJ25	75
A06096	DP-012-25	147
A06097	DP-024-25	147
A06098	DP-048-25	147
A06142	ISGO-50H Ex	207
A06143	ISGO-100H Ex	207
A06145	FLP-PV550 V/U	100
A06146	FLP-PV550 V/U S	100
A06148	DL-1G-RJ45-PoE-AB	173
A06149	DL-10G-RJ45-PoE-AB	173
A06207	ZX-0,44-N50/F/F	192
A06222	SP-T2+T3-320/Y-TTT-LED	95
A06243	SP-T2+T3-320/Y-CCT-LED	95
A06244	SP-T2+T3-320/Y-TLT-LED	94
A06245	SP-T2+T3-320/Y-CCC-LED	95
A06246	SP-T2+T3-320/Y-CLC-LED	94
A06247	SP-T2+T3-320/Y-TLC-LED	94
A06248	SP-T2+T3-320/Y-TTC-LED	95
A06255	RACK-PROTECTOR-X8-1U-PI	89
A06256	RACK-PROTECTOR-EURO-X12-1U-PI	89
A06257	FLP-25-T1-V/1+1	26
A06258	FLP-25-T1-VS/1+1	26
A06259	FLP-25-T1-V/2	27
A06260	FLP-25-T1-VS/2	27
A06262	DA-275-BF2	82
A06263	FLP-25-T1-V/1	25
A06264	FLP-25-T1-VS/1	25
A06281	DMG-024/V/1-4FR1-DIF	132
A06290	DMHF-015/1-RB	164
A06305	SLP-600 V/3 S	62
A06385	BDM-006/V/1-FR2	118
A06388	BDM-006/V/2-FR1	119
A06390	BDM-006/V/2-JFR1	124
A06391	BDM-006/V/2-JFR2	124
A06396	BDM-006/V/4-JFR1	126
A06398	BDM-012/V/1-FR2	118
A06401	BDM-012/V/2-FR1	119
A06403	BDM-012/V/2-JFR1	124
A06404	BDM-012/V/2-JFR2	124
A06409	BDM-012/V/4-JFR1	126
A06411	BDM-024/V/1-FR2	118
A06414	BDM-024/V/2-FR1	119
A06416	BDM-024/V/2-JFR1	125


Ordering number	Type	Page
A06417	BDM-024/V/2-JFR2	125
A06422	BDM-024/V/4-JFR1	126
A06424	BDM-048/V/1-FR2	118
A06427	BDM-048/V/2-FR1	119
A06429	BDM-048/V/2-JFR1	125
A06430	BDM-048/V/2-JFR2	125
A06435	BDM-048/V/4-JFR1	126
A06438	BDM-060/V/1-FR1	117
A06439	BDM-060/V/1-FR2	118
A06443	BDM-060/V/2-FR1	119
A06461	BDM-230/V/1-FR1	117
A06464	BDM-230/V/2-FR	119
A06467	BDG-006/V/1-4FR1	127
A06469	BDG-006/V/1-FR2	122
A06472	BDG-006/V/2-FR1	123
A06475	BDG-012/V/1-4FR1	127
A06477	BDG-012/V/1-FR2	122
A06480	BDG-012/V/2-FR1	123
A06483	BDG-024/V/1-4FR1	127
A06485	BDG-024/V/1-FR2	122
A06488	BDG-024/V/2-FR1	123
A06491	BDG-048/V/1-4FR1	127
A06493	BDG-048/V/1-FR2	122
A06496	BDG-048/V/2-FR1	123
A06499	BDG-060/V/1-FR1	121
A06500	BDG-060/V/1-FR2	122
A06504	BDG-060/V/2-FR1	123
A06514	BDG-230/V/1-FR1	121
A06517	BDG-230/V/2-FR	123
A06520	BDGHF-006/V/1-FR1	130
A06523	BDGHF-006/V/2-FR1	131
A06526	BDGHF-012/V/1-FR1	130
A06529	BDGHF-012/V/2-FR1	131
A06532	BDGHF-024/V/1-FR1	130
A06535	BDGHF-024/V/2-FR1	131
A06538	BDGHF-230/V/1-FR	130
A06541	BDGHF-230/V/2-FR1	131
A06545	BDMHF-006/V/1-4FR1	129
A06547	BDMHF-006/V/1-FR1	128
A06551	BDMHF-024/V/1-4FR1	129
A06553	BDMHF-024/V/1-FR1	128
A06555	HX-470-N50 F/F	191
A06556	HX-470-N50 F/M	191
A06569	DL-CS-RACK-1U-INJECTOR	184
A06570	DL-1G-POE-PCB-INJECTOR	185
A06574	DL-Cat. 6A-60V	172
A06596	DMS-024-T	145
A06597	DMS-048-T	145
A06620	DL-1G-POE-INJECTOR	176
A06635	DPF-012DC-16	148
A06636	DPF-024DC-16	148
A06637	DPF-048DC-16	148
A06664	DPF-012DC-16-S	149
A06665	DPF-024DC-16-S	149
A06666	DPF-048DC-16-S	149
A06703	HX-350-N50 F/F	191
A06704	HX-350-N50 F/M	191
A06726	DM-006/1-R-DJ	140
A06727	DM-012/1-R-DJ	140
A06728	DM-024/1-R-DJ	140
A06729	DM-048/1-R-DJ	140
A06731	DM-012/1-L2-DJ	141
A06732	DM-024/1-L2-DJ	141
A06733	DM-048/1-L2-DJ	141

Ordering number	Type	Page
A06737	CZ-275-A	83
A06738	DA-275-A	85
A06739	DA-275-S	86
A06740	DA-320-LED	96
A07008	RACK-PROTECTOR-EURO-X12-1U-5	88
A07009	RACK-PROTECTOR-X8-1U-5	88
A07022	SLP-075 V/2	57
A07023	SLP-075 V/2 S	57
A07043	FLP-EV12,5-VBH/1S+1	42
A07049	FLP-EV12,5-VBH/3S+1	42
A07051	SLP-075-VB/1	64
A07052	SLP-075-VB/1S	65
A07053	SLP-150-VB/1	64
A07054	SLP-150-VB/1S	65
A07055	SLP-275-VB/1	64
A07056	SLP-275-VB/1S	65
A07057	SLP-275-VB/1+1	66
A07058	SLP-275-VB/1S+1	66
A07059	SLP-275-VB/3+1	67
A07060	SLP-275-VB/3S+1	67
A07069	DL-1G-60V-PoE	175
A07070	DL-10G-60V-PoE	175
A07084	DL-TLF-UHF	168
A07085	DL-1G-60V-PoE-M	183
A07086	DL-10G-60V-PoE-M	183
A07098	DL-10G-PoE-IP66	174
A07108	DL-Cat. 6A	172
A07112	FLP-25-T1-VSF/1	21
A07113	FLP-25-T1-VSF/3	22
A07114	FLP-25-T1-VSF/3+1	23
A07115	FLP-25-T1-VSF/4	24
A07116	FLP-B+C-MAXI-VSF/1	32
A07117	FLP-B+C-MAXI-VSF/3	33
A07118	FLP-B+C-MAXI-VSF/3+1	34
A07119	FLP-B+C-MAXI-VSF/4	35
A07120	DL-VDSL3	169
A07407	FLP-PV275 V/U	99
B00010	GIGATESTpro - SALTEK	210

Notes

Notes

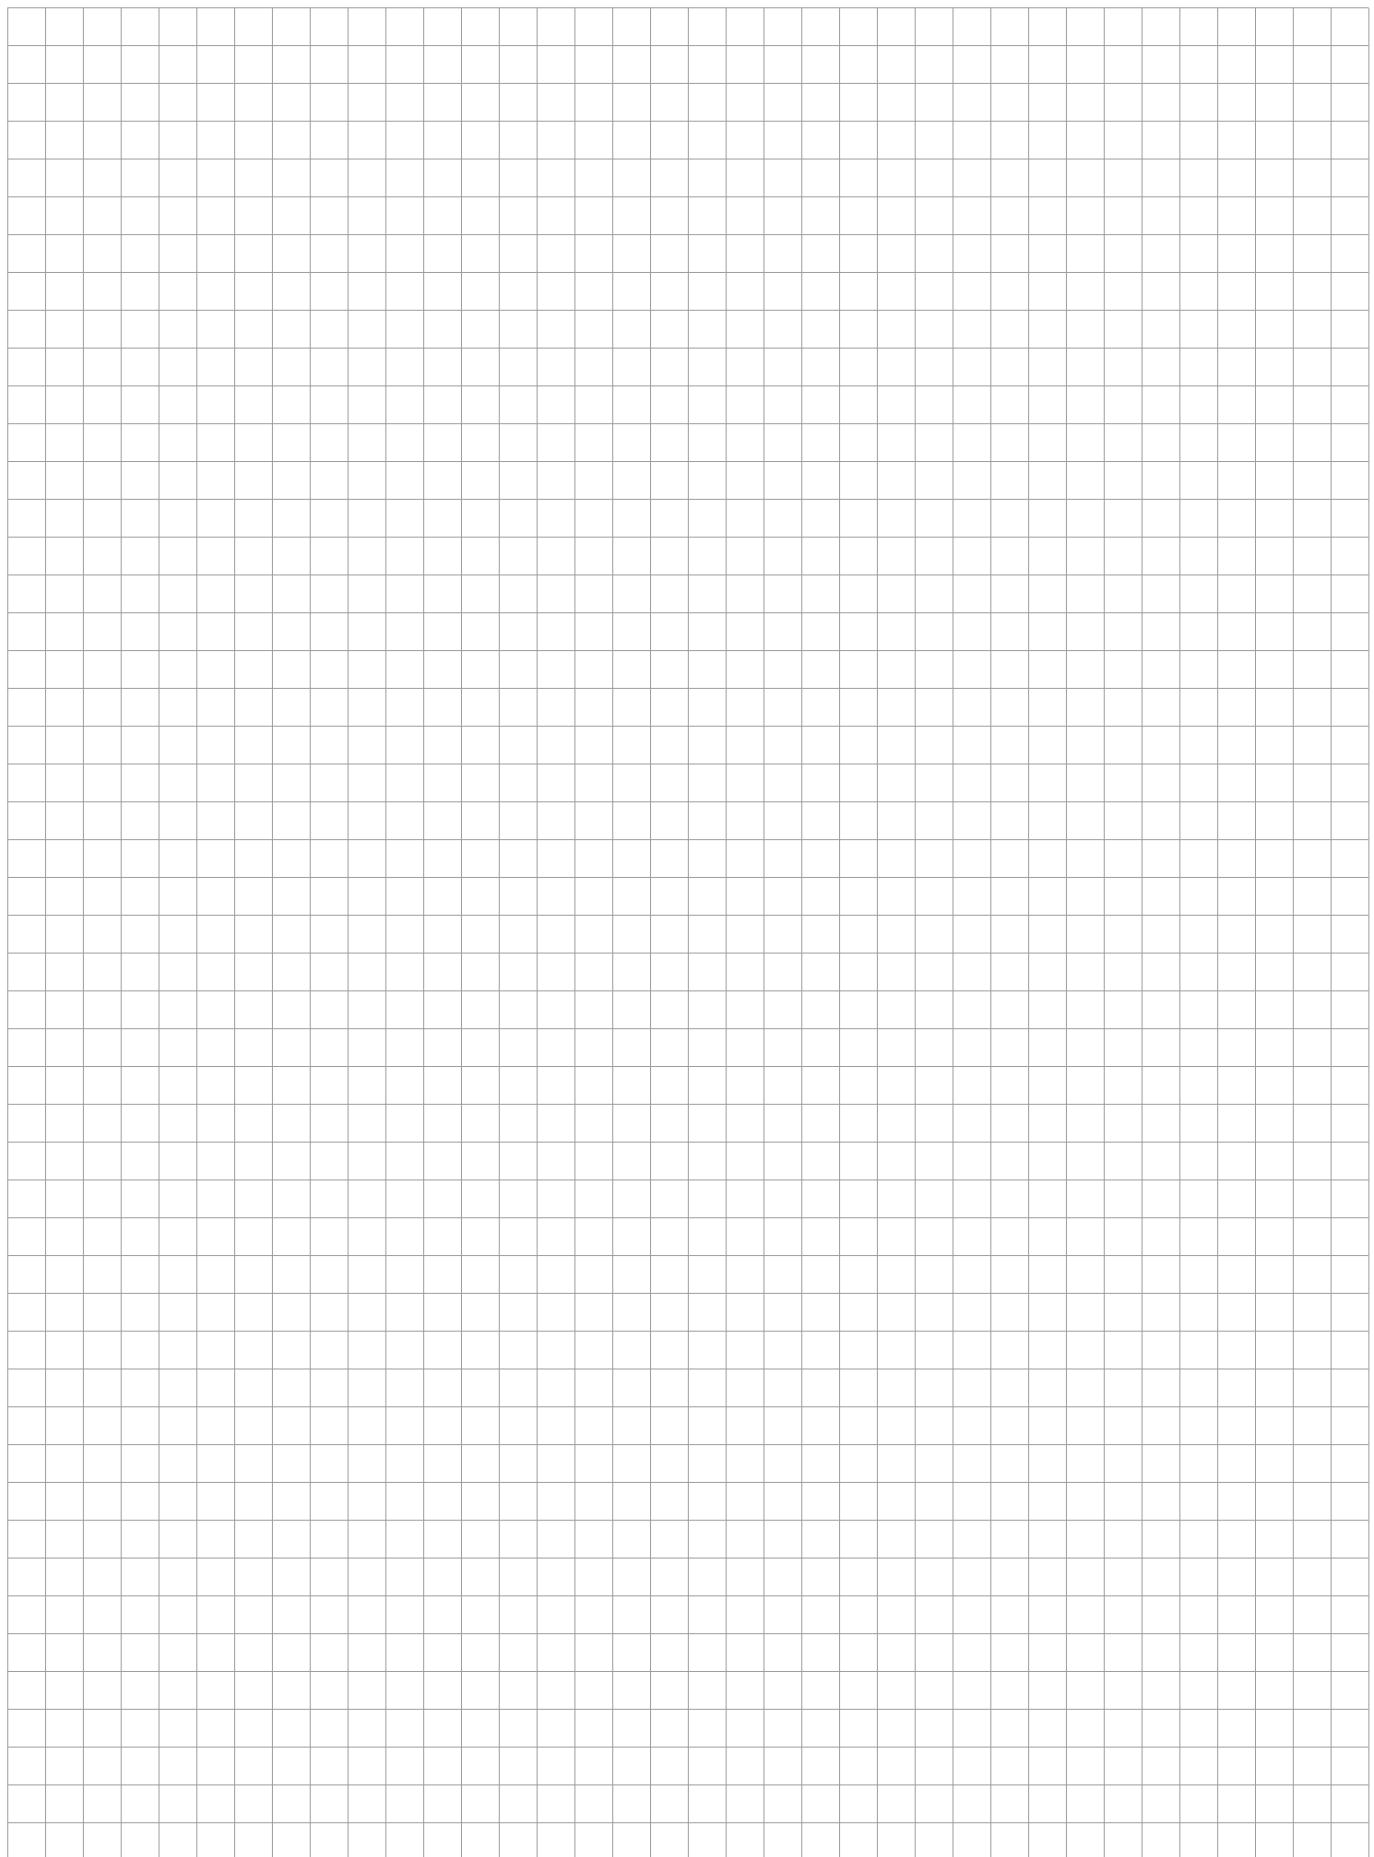

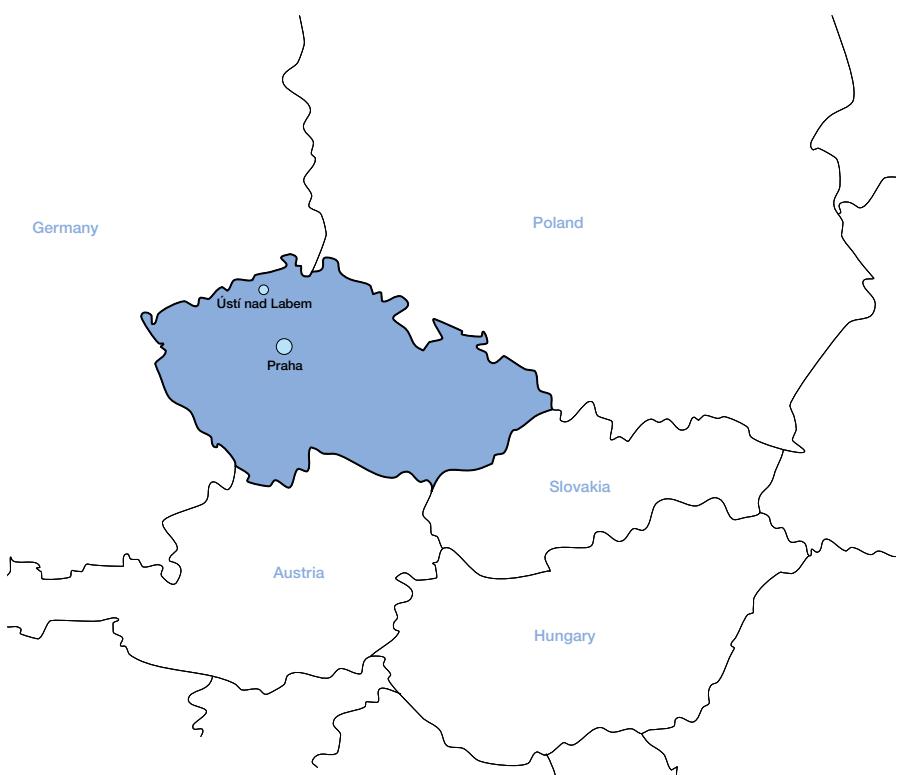

SALTEK s.r.o.
Drážďanská 85
400 07 Ústí nad Labem
Czech Republic
Phone: +420 272 942 470
E-mail: info@saltek.cz
www.saltek.eu/en

Distributor: