

DA-275-DF25

SPD - for low voltage / SPD type 3 / With RFI filter


Surge protection with RFI filter

visual fault signalling


- surge protection with integrated RFI filter
- installation to LV installations, close to protected equipment
- for protection of power lines of I&C, electronic security and fire detection systems, etc. against impact of surge voltage and RF disturbance



Product dimensions



Basic circuit diagram

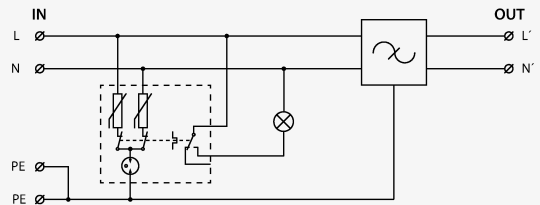

Parameter name	Parameter value
Type of SPD	T3
Mounting	DIN rail 35 mm
Nominal voltage	U_n 230.00 V AC
Maximum operating voltage	U_c 275.00 V AC
Nominal load current	I_L 25.000 A
Type of network	TN TT
Maximum overcurrent protection	25 A gL/gG or C 25 A
Short-circuit current rating	I_{SCCR} 6.0 kA
Residual current	I_{PE} 0.750 mA
Filter attenuation at 1 MHz (50 Ω /50 Ω) symmetrical	30 dB
Filter attenuation at 1 MHz (50 Ω /50 Ω) unsymmetrical	30 dB
Test voltage L-N	U_{oc} 6.0 kV
Test voltage L+N-PE	U_{oc} 10.0 kV
Test voltage N-PE	U_{oc} 6.0 kV
Voltage protection level mode L-N	U_p 1.40 kV
Voltage protection level mode L-PE	U_p 1.00 kV

Voltage protection level mode N-PE	U_p	1.00 kV
Response time L-N	t_a	25 ns
Response time N-PE	t_a	100 ns
TOV 5 s L-N		335 V
TOV 5 s L-PE		440 V
TOV characteristic (TOV 5 s)		withstand
TOV 120 min L-N		440 V
TOV 120 min L-PE		335 V
TOV characteristic (120 min)		withstand
TOV 200 ms L-PE		1 455 V
TOV 200 ms N-PE		1 200 V
TOV characteristic (TOV 200 ms)		safe failure
Cross-section of connected conductors solid (min)		0.75 mm ²
Cross-section of connected conductors solid (max)		10.00 mm ²
Cross-section of connected conductors stranded (min)		0.75 mm ²
Cross-section of connected conductors stranded (max)		10.00 mm ²
Cross-sectional area of conductors with ferrule (min)		0.75 mm ²
Cross-section of connected conductors with ferrule (max)		10.00 mm ²
Fault indication		red indicator
Degree of protection		IP 20C (installed)
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN IEC 61643-01:2025+A11:2025, EN IEC 61643-11:2025
ETIM Class		EC000942
Customs tariff number		85363030
EAN		8595090576686
Order number		A07668